



TEMPORARY TRAFFIC CONTROL TYPICAL APPLICATION

NOTE:
SEE STANDARD NO. MD 104.01-25
FOR MARKER DETAIL.

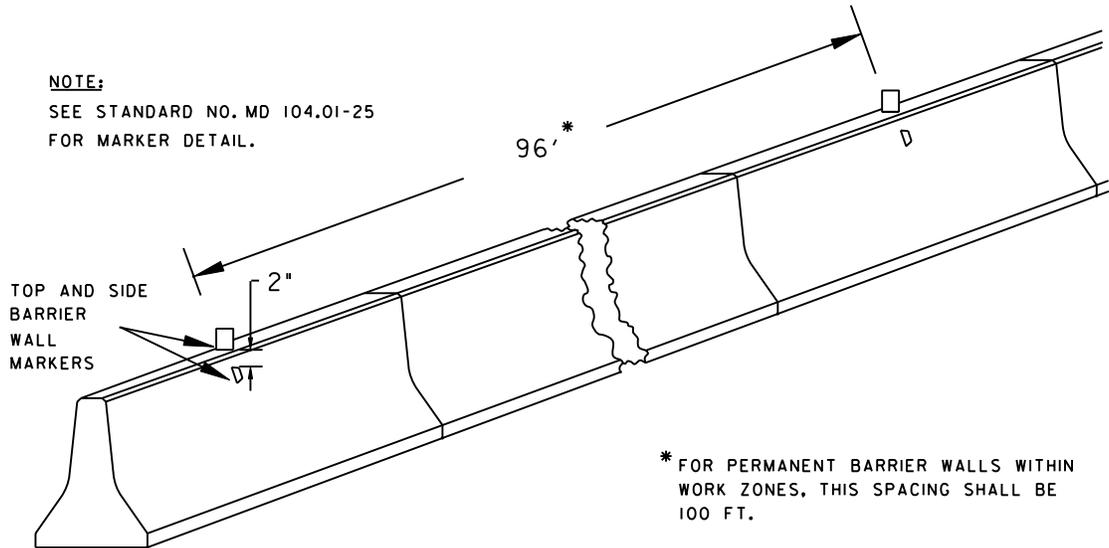

* FOR PERMANENT BARRIER WALLS WITHIN
WORK ZONES, THIS SPACING SHALL BE
100 FT.

TANGENT SECTION

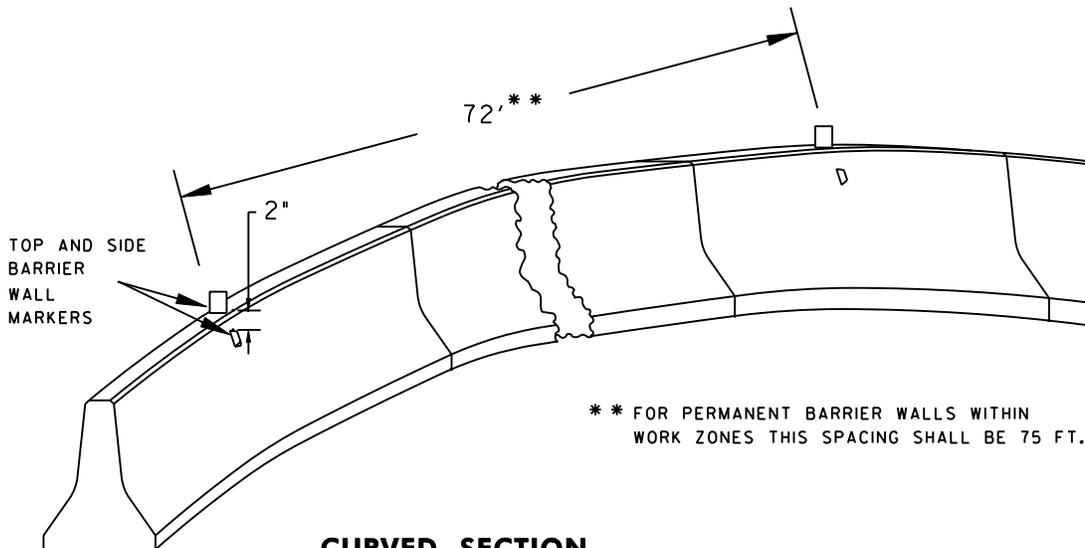

** FOR PERMANENT BARRIER WALLS WITHIN
WORK ZONES THIS SPACING SHALL BE 75 FT.

CURVED SECTION

SPECIFICATION 104	CATEGORY CODE ITEMS			
APPROVED	 DIRECTOR - OFFICE OF TRAFFIC AND SAFETY			
 State Highway Administration	APPROVAL • SHA	APPROVAL • FEDERAL		
	REVISIONS	HIGHWAY ADMINISTRATION		
	APPROVAL	8-20-03	APPROVAL	9-23-03
	REVISED	8-11-10	REVISED	7-29-10
	REVISED	REVISED		
	REVISED	REVISED		

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
BARRIER DELINEATION
BARRIER BETWEEN 4 AND 15 FEET
FROM EDGE LINE

STANDARD NO.

MD 104.01-26