


**TEMPORARY TRAFFIC CONTROL TYPICAL APPLICATION FOR SIDEWALK CLOSURE
ALTERNATE PEDESTRIAN ROUTE USING ROADWAY LANE OR SHOULDER**

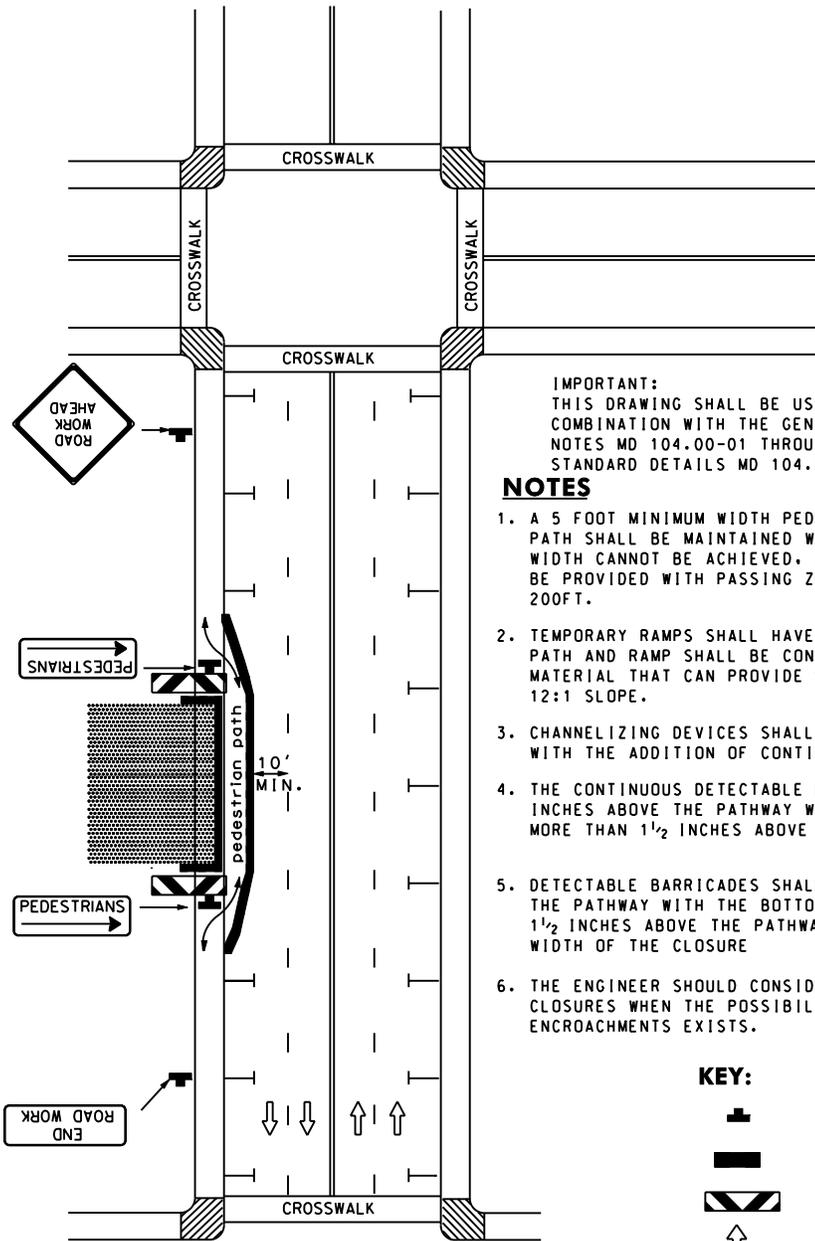

IMPORTANT:
THIS DRAWING SHALL BE USED IN COMBINATION WITH THE GENERAL NOTES MD 104.00-01 THROUGH MD 104.00-18 AND STANDARD DETAILS MD 104.01-01 THROUGH MD 104.01-81


NOTES

1. A 5 FOOT MINIMUM WIDTH PEDESTRIAN PATH / ALTERNATE PEDESTRIAN PATH SHALL BE MAINTAINED WHERE POSSIBLE. WHERE A 5 FOOT MIN WIDTH CANNOT BE ACHIEVED, A MINIMUM WIDTH OF 36 INCHES SHALL BE PROVIDED WITH PASSING ZONES (60 IN X 60 IN) AT LEAST EVERY 200FT.
2. TEMPORARY RAMPS SHALL HAVE A SLOPE OF 12:1 MAX. THE PEDESTRIAN PATH AND RAMP SHALL BE CONSTRUCTED OF HOT MIX ASPHALT OR OTHER MATERIAL THAT CAN PROVIDE SMOOTH, HARD SURFACE & WILL MAINTAIN 12:1 SLOPE.
3. CHANNELIZING DEVICES SHALL BE TEMPORARY CONCRETE BARRIERS WITH THE ADDITION OF CONTINUOUS DETECTABLE EDGING.
4. THE CONTINUOUS DETECTABLE EDGINGS SHALL PROTRUDE AT LEAST 6 INCHES ABOVE THE PATHWAY WITH THE BOTTOM OF THE EDGING NO MORE THAN 1½ INCHES ABOVE THE PATHWAY.
5. DETECTABLE BARRICADES SHALL EXTEND AT LEAST 36" ABOVE THE PATHWAY WITH THE BOTTOM OF THE BARRICADE NO MORE THAN 1½ INCHES ABOVE THE PATHWAY, AND SHALL EXTEND THE FULL WIDTH OF THE CLOSURE
6. THE ENGINEER SHOULD CONSIDER ADDITIONAL, ADJACENT LANE CLOSURES WHEN THE POSSIBILITY OF UNPLANNED TRAVELWAY ENCROACHMENTS EXISTS.

KEY:

-  SIGN
-  CHANNELIZING DEVICES WITH DETECTABLE EDGING
-  DETECTABLE BARRICADE
-  DIRECTION OF TRAFFIC
-  WORK SITE
-  PARKING SPACES / SHOULDER AREA
-  TEMPORARY RAMP (WITH DETECTABLE SURFACE WARNING)
-  EXISTING CURB RAMP

SPECIFICATION 104	CATEGORY CODE ITEMS
-----------------------------	---------------------

APPROVED 
DIRECTOR - OFFICE OF TRAFFIC AND SAFETY

	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
	APPROVAL 7-14-08	APPROVAL 7-3-08
	REVISED 8-11-10	REVISED 7-29-10
	REVISED	REVISED
	REVISED	REVISED

**Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION**
STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
**PED AND CURB-LANE CONTROL/MULTILANE
UNDIV. SPEED LESS THAN OR EQUAL TO
40 MPH / OVER 12 HRS. OR NIGHTTIME USE**
STANDARD NO. MD 104.06-09A