


- ① 1.5" SUPERPAVE ASPHALT MIX 9.5mm FOR SURFACE, PG64S-22, LEVEL 2
- ② 2.5" SUPERPAVE ASPHALT MIX 19.0mm FOR BASE, PG64S-22, LEVEL 2
- ③ 4" GRADED AGGREGATE BASE

DRIVEWAYS & BIKE PATHS – FLEXIBLE PAVEMENT SECTION

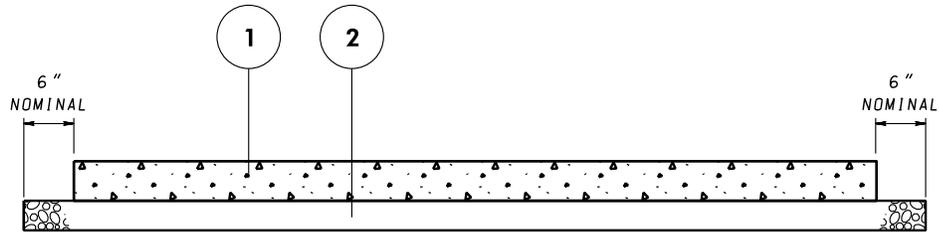

- ① 5" JOINTED PLAIN CONCRETE – MIX #7
- ② 3" GRADED AGGREGATE BASE

BIKE PATHS – RIGID PAVEMENT SECTION

NOTES

- 1. THE JOINT SPACING SHALL BE 5 FEET. THERE ARE NO LOAD TRANSFER REQUIREMENTS FOR BIKE PATHS.
- 2. FOR RIGID DRIVEWAYS, REFER TO STANDARDS MD 630.01 THROUGH MD 630.03.

SPECIFICATION	CATEGORY CODE ITEMS
APPROVED	 DIRECTOR – OFFICE OF HIGHWAY DEVELOPMENT
	APPROVAL • SHA REVISIONS APPROVAL 2-25-16 REVISED REVISED REVISED
	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION APPROVAL 2-23-16 REVISED REVISED REVISED

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

DRIVEWAYS AND BIKE PATHS
PAVEMENT SECTIONS

STANDARD NO. MD 580.08