



- ① 2" SUPERPAVE ASPHALT MIX 12.5mm FOR SURFACE, PG64S-22, LEVEL 2
- ② 8" SUPERPAVE ASPHALT MIX 25.0mm FOR BASE, PG64S-22, LEVEL 2 (TWO LIFTS)
- ③ 24" GRADED AGGREGATE BASE (FOUR LIFTS) FOR 30' CLOSEST TO BRIDGE OR 12" GRADED AGGREGATE BASE BEYOND 30' (TWO LIFTS).

BRIDGE APPROACHES – LIGHT TRAFFIC

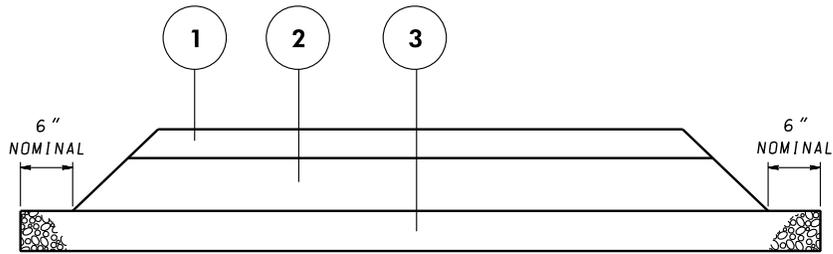

- ① 2" SUPERPAVE ASPHALT MIX 12.5 mm FOR SURFACE, PG64S-22, LEVEL 2
- ② 10" SUPERPAVE ASPHALT MIX 25.0 mm FOR BASE, PG64S-22, LEVEL 2 (TWO LIFTS)
- ③ 24" GRADED AGGREGATE BASE (FOUR LIFTS) FOR 30' CLOSEST TO BRIDGE OR 12" GRADED AGGREGATE BASE BEYOND 30' (TWO LIFTS).

BRIDGE APPROACHES – MEDIUM TRAFFIC

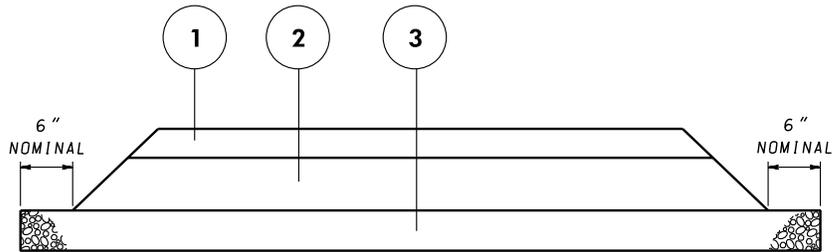

- ① 2" SUPERPAVE ASPHALT MIX 12.5mm FOR SURFACE, PG76E-28, LEVEL 4
- ② 12" SUPERPAVE ASPHALT MIX 25.0mm FOR BASE, PG64S-22, LEVEL 2 (THREE LIFTS)
- ③ 24" GRADED AGGREGATE BASE (FOUR LIFTS) FOR 30' CLOSEST TO BRIDGE OR 12" GRADED AGGREGATE BASE BEYOND 30' (TWO LIFTS).

BRIDGE APPROACHES – HEAVY TRAFFIC

NOTES

- 1. LIGHT TRAFFIC ~ ADT < 10,000 VEHICLES/DAY
- 2. MEDIUM TRAFFIC ~ ADT > 10,000 TO LESS THAN < 30,000 VEHICLES/DAY
- 3. HEAVY TRAFFIC ~ ADT > 30,000 VEHICLE/DAY

SPECIFICATION	CATEGORY CODE ITEMS
APPROVED	 DIRECTOR – OFFICE OF HIGHWAY DEVELOPMENT
	APPROVAL • SHA REVISIONS
	APPROVAL 2-25-16
	REVISED
	REVISED

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

**BRIDGE APPROACH
PAVEMENT SECTIONS**

STANDARD NO. MD 580.09