


PROPOSED ADA SIDEWALK AND RAMP DETAILS - 1"=10'

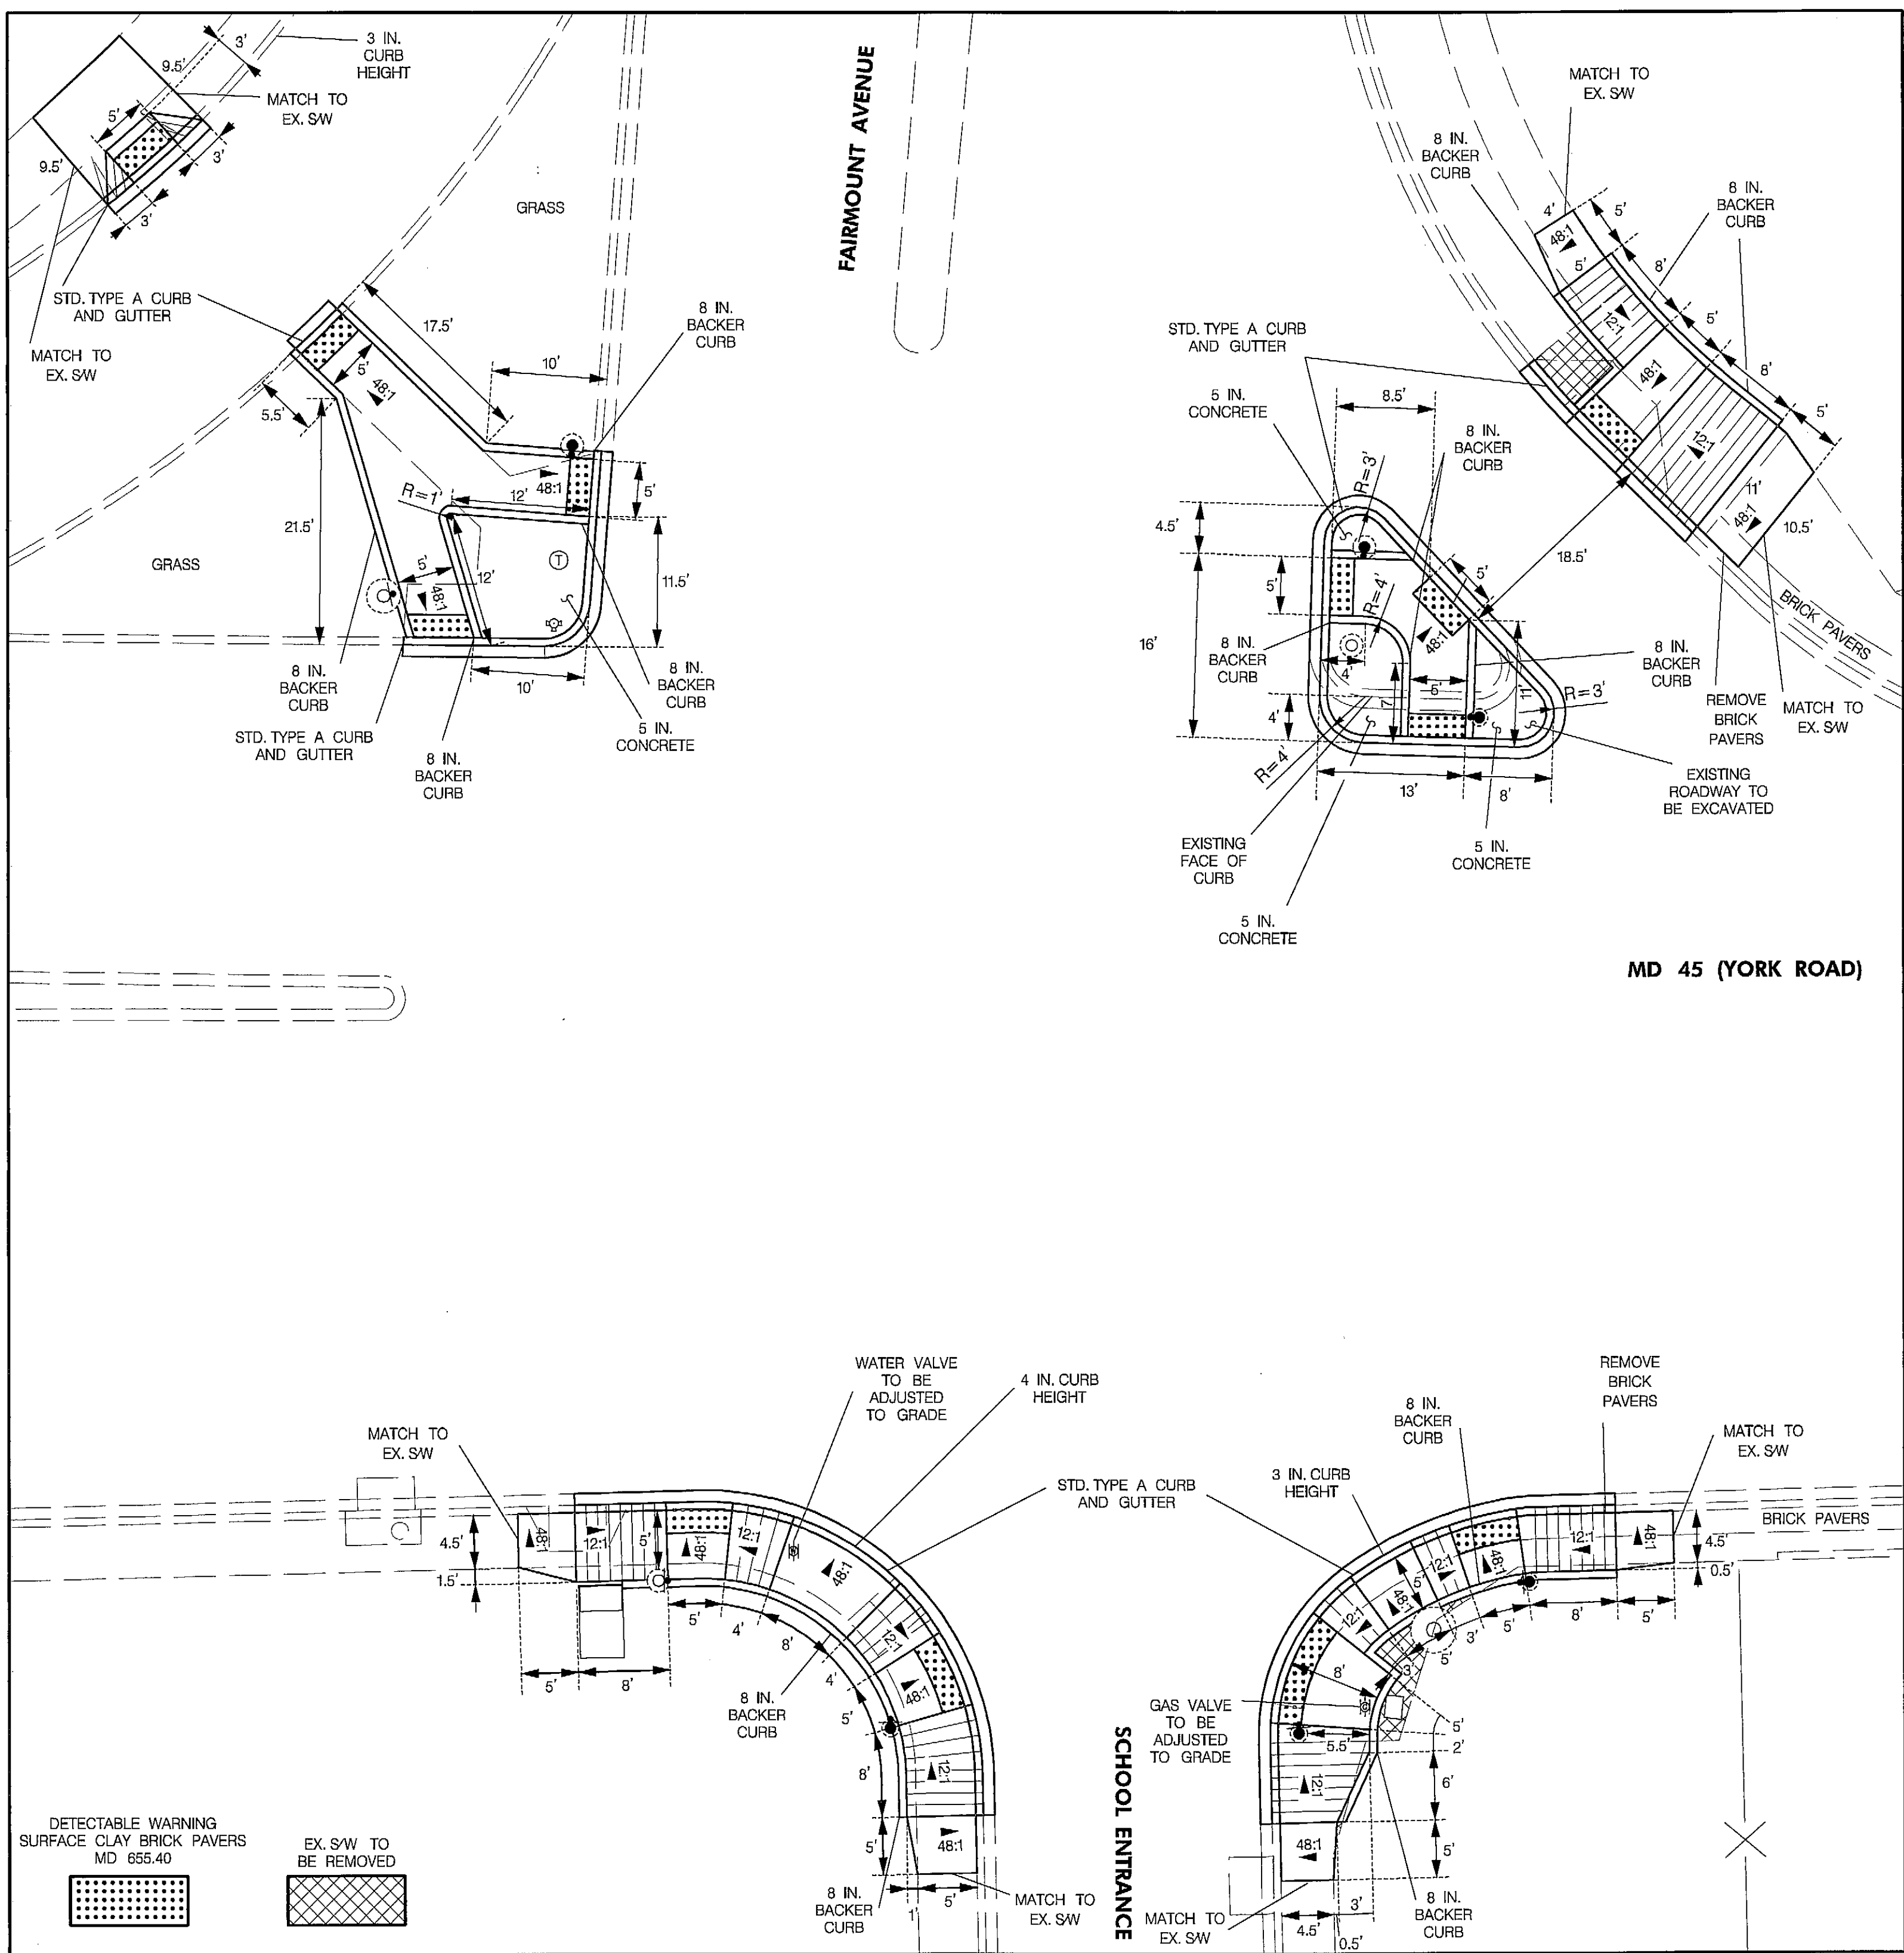

EQUIPMENT LIST 'A'

EQUIPMENT TO BE FURNISHED BY THE SHA.

ITEM NO	QUANTITY	DESCRIPTION
9570	233 SF	SHEET ALUMINUM GROUND MOUNTED SIGN 1 EA - OMI-3 (18 IN. X 18 IN.) 1 EA - R4-7(1) (18 IN. X 30 IN.) 1 EA - R10-6 (24 IN. X 36 IN.) 17 EA - SI-1 (36 IN. X 36 IN.) 7 EA - W16-7pL FYG (24 IN. X 12 IN.) 10 EA - W16-7pR FYG (24 IN. X 12 IN.)
9571	49 SF	SHEET ALUMINUM MAST ARM/POLE MOUNTED SIGN: 1 EA - M1-5(6) (24 IN. X 48 IN.) "SOUTH, MD 45, RIGHT ARROW" 1 EA - M1-5(6) (36 IN. X 72 IN.) "NORTH, MD 45, LEFT ARROW" 4 EA - R10-3(1) (9 IN. X 15 IN.) "PUSH BUTTON TO CROSS YORK ROAD" 2 EA - R10-3(1) (9 IN. X 15 IN.) "PUSH BUTTON TO CROSS FAIRMOUNT AVENUE" 2 EA - R10-3(1) (9 IN. X 15 IN.) "PUSH BUTTON TO CROSS SCHOOL ENTRANCE" 1 EA - R3-5a (30 IN. X 36 IN.) 1 EA - R3-5L (30 IN. X 36 IN.)

TOD NO: XY125-06  
SHA NO: BA087B54  
MD 45 @ Fairmount Avenue

EQUIPMENT LIST 'B'

EQUIPMENT TO BE FURNISHED AND INSTALLED BY THE CONTRACTOR.

ITEM NO	QUANTITY	DESCRIPTION
1001	2 EA	MAINTENANCE OF TRAFFIC
2001	3 CY	CLASS 2 EXCAVATION
2002	2 CY	TEST PIT EXCAVATION
5002	300 LF	5" HEAT APPLIED WHITE OR YELLOW PERMANENT PAVEMENT MARKINGS
5003	800 LF	REMOVAL OF EXISTING PERMANENT PAVEMENT LINE MARKINGS
5004	1,400 LF	12 INCH WHITE PREFORMED THERMOPLASTIC PAVEMENT MARKING LINES
5005	125 LF	24 INCH WHITE PREFORMED THERMOPLASTIC PAVEMENT MARKING LINES
5006	35 SF	WHITE PREFORMED THERMOPLASTIC PAVEMENT MARKING LEGENDS AND SYMBOLS
6001	300 LF	STANDARD TYPE A COMBINATION CURB AND GUTTER 12 INCH GUTTER PAN 8 INCH DEPTH
6002	1,900 SF	5 INCH CONCRETE SIDEWALK
6003	140 SF	DETECTABLE WARNING SURFACE FOR CURB RAMPS (TYPE 3 BRICK PAVERS)
8005	2 EA	ADJUST HANDHOLE TO GRADE WITH NEW FRAME AND COVER
8008	7 EA	AUDIBLE/TACTILE PEDESTRIAN PUSHBUTTON STATION AND SIGNS
8009	6 EA	BREAKAWAY PEDESTAL POLE (ANY SIZE)
8011	1 EA	CONDUIT BEND IN EXISTING FOUNDATION BASE (ANY SIZE)
8022	2 EA	MICROLOOP PROBE (ANY LENGTH) LEAD-IN CABLE UP TO 1000'
8024	1 EA	REMOVE & DISPOSE OF EQUIPMENT (PER ASSIGNMENT)
8030	10 LF	1" DETECTOR SLEEVE GALVANIZED OR FLEXIBLE LIQUID TIGHT CONDUIT
8040	70 LF	UP TO 4 INCH SCHEDULE 80 RIGID PVC CONDUIT-TRENCHED
8041	370 LF	WOOD SIGN SUPPORTS UP TO 4' X 6"
8042	285 SF	INSTALL OVERHEAD OR GROUND MOUNTED SIGN (INCLUDING ALL HARDWARE)
8044	70 LF	NO. 6 AWG STRANDED BARE COPPER GROUND WIRE
8055	660 LF	ELECTRICAL CABLE - 2 CONDUCTOR (NO. 14 AWG)
8060	170 LF	SAW CUT FOR SIGNAL (LOOP DETECTOR)

EQUIPMENT LIST 'C'

EQUIPMENT TO BE REMOVED AND RETURNED TO SHA.

ITEM NO	QUANTITY	DESCRIPTION
NONE		ALL REMOVED EQUIPMENT SHALL BECOME THE PROPERTY OF THE CONTRACTOR



STATE OF MARYLAND  
DEPARTMENT OF TRANSPORTATION  
STATE HIGHWAY ADMINISTRATION  
OFFICE OF TRAFFIC & SAFETY  
TRAFFIC ENGINEERING DESIGN DIVISION  
MD 45 (YORK ROAD) AT FAIRMOUNT AVENUE

TOWSON, MARYLAND

GENERAL INFORMATION SHEET (2 OF 2)

SCALE	NONE	DATE	05/2012	CONTRACT NO.	XY1255185
DESIGNED BY	KXT OF STV	COUNTY	BALTIMORE		
DRAWN BY	KXT OF STV	LOGMILE	03004502.82		
CHECKED BY	MTS OF STV	TIMS NO.	L052		
F.A.P. NO.		TOD NO.			
TS NO.3981E-G12	DRAWING	SG-03	OF 03	SHEET NO.	03 OF 03

PLOTTED: Monday, April 30, 2012 AT 09:03 AM  
FILE: I:\PROJECTS\4014285\4014285\_0100\Drawings\TRA\SG-N001\_MD45\_Fairmount.dgn

BY: tamovk -

**STV**  
STV Incorporated  
7125 Ambassador Road, Suite 200  
Baltimore, MD 21244  
www.stvinc.com