



PLAN VIEW

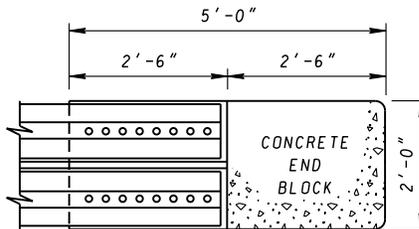


PLAN

INSTALL EIGHT (8) 7/8" DIA. BOLTS
& NUTS, 10" LONG 2" PROJECTION
ON EACH W BEAM PANEL
ANCHOR BOLTS USING EPOXY GROUT

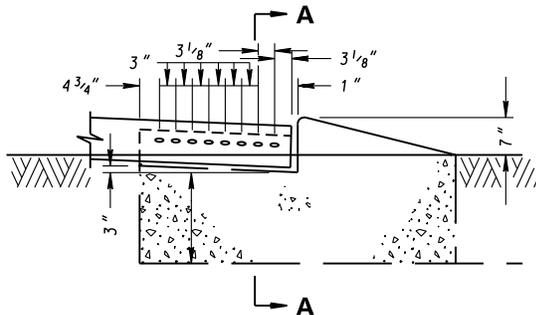

ELEVATION

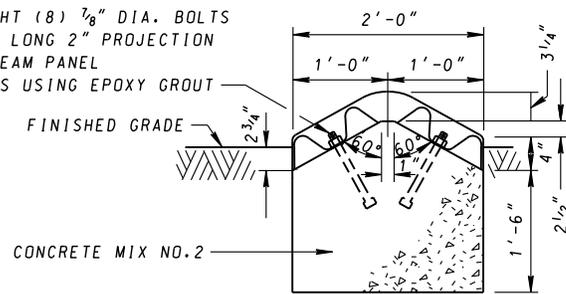

SECTION A-A

END BLOCK DETAILS

NOTE

1. THE USE OF THIS END TREATMENT IS LIMITED TO POSTED SPEEDS OF 40 MPH OR LESS AND ADT LESS THAN 10,000.
2. FOR ALTERNATIVE OFFSET BLOCKS SEE STD MD 605.21 NOTE 5.

NOT TO BE USED ON THE NATIONAL HIGHWAY SYSTEM (NHS)

SPECIFICATION 605	CATEGORY CODE ITEMS
APPROVED	<i>[Signature]</i> DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT
	APPROVAL • SHA REVISIONS
	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
	APPROVAL 6-2-75
	APPROVAL 9-30-75
REVISED 4-17-06	REVISED 4-5-06
REVISED	REVISED
REVISED	REVISED

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

TYPE H TRAFFIC BARRIER END TREATMENT

STANDARD NO.

MD 605.09