




SWAGED CABLE ASSEMBLY AND RELATED HARDWARE ASSEMBLY

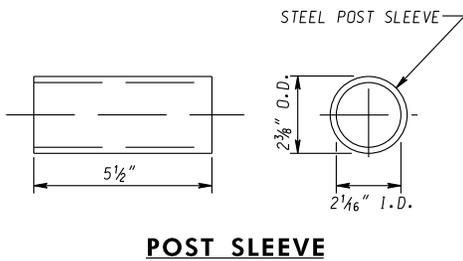


POST SLEEVE

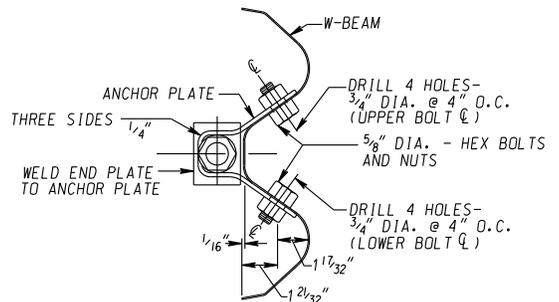


ANCHOR PLATE TO W-BEAM CONNECTION DETAIL

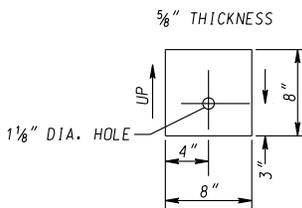

TIMBER BEARING PLATE



END PLATE

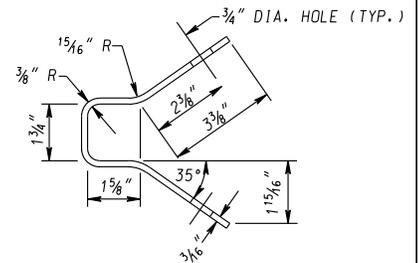

SECTION A-A

NOTES

1. TO ENSURE THAT THE TIMBER BEARING PLATE REMAINS IN POSITION, 2-10d GALVANIZED STEEL NAILS SHALL BE DRIVEN IN THE SHORT TIMBER BREAKAWAY POST, AND BENT OVER BEARING PLATE.
2. TIGHTEN ASSEMBLY UNTIL CABLE IS TAUGHT.
3. ALL HOLES SHALL BE DRILLED PRIOR TO GALVANIZING.

SPECIFICATION -	CATEGORY CODE ITEMS
APPROVED	<i>[Signature]</i> DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT
	APPROVAL • SHA REVISIONS
	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
	APPROVAL 4-12-16
	REVISIONS -

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

TRAFFIC BARRIER W BEAM, SHORT RADIUS
HARDWARE & DETAILS

STANDARD NO. MD 605.52-02