



PLASTIC POSTS



- SEE SHA LIST FOR APPROVED MODELS AND NEEDED PARTS

* TOP OF REFLECTING HEAD IS 4'-0" ABOVE NEAR ROADWAY EDGE.

WOOD SNOW GUIDE STAKE

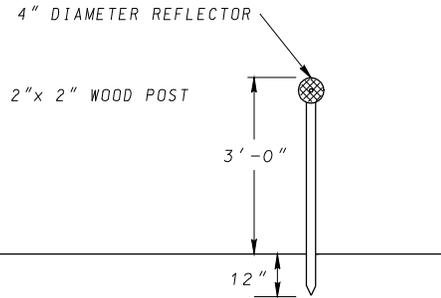


- WOOD SNOW STAKE
- HIGHWAY YELLOW

BARRIER WALL AND W-BEAM BARRIER MARKERS


BARRIER WALL MARKER (TYPICAL)



SIDE VIEW



TOP VIEW




FRONT VIEW

W-BEAM MARKER (TYPICAL)



TOP VIEW




FRONT VIEW



SIDE VIEW

NOTES

1. BARRIER MARKERS SHALL BE YELLOW IN COLOR WHEN PLACED ON LEFT MEDIAN-SIDE BARRIER, WHITE WHEN PLACED ON RIGHT SHOULDER-SIDE BARRIER.
2. SEE S.H.A. LIST FOR APPROVED MODELS AND NEEDED PARTS.
3. REFER TO STDS. 665.03 THRU 665.06 FOR PLACEMENT, SPACING AND MOUNTING HEIGHT.

SPECIFICATION 604, 605	CATEGORY CODE ITEMS	Maryland Department of Transportation STATE HIGHWAY ADMINISTRATION STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES	
APPROVED	 DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT		
	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	STANDARD NO. MD 665.02
	APPROVAL	APPROVAL	
	REVISED	REVISED	
	REVISED	REVISED	