


## DELINEATION PLACEMENT

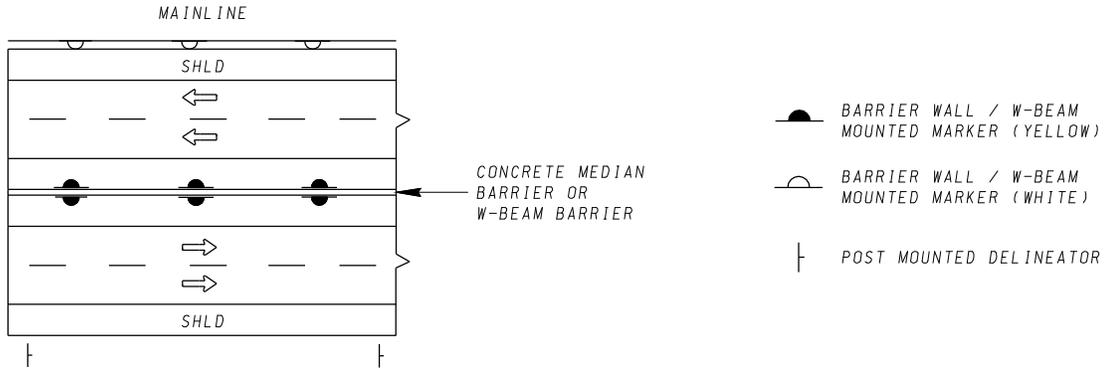

### TYPICAL SPACING FOR POST MOUNTED DELINEATORS

MAINLINE - 264'  
 ACCEL/DECEL AND C/D ROADS - 100' (DOUBLE DELINEATORS) REFER TO STD. MD 665.05  
 RAMPS - REFER TO STD. MD 665.06

### TYPICAL SPACING FOR PERMANENT BARRIER WALL MOUNTED MARKERS

(FOR ALL BARRIER WALLS WITHIN 15' OF THE TRAVEL LANE)  
 MAINLINE - 100' **NOTE** SPACING SHOULD BE REDUCED TO 75' IN CURVES WITH A RADIUS LESS THAN 1000' AND 50' IN CURVES WITH A RADIUS LESS THAN 300'.  
 ACCEL/DECEL AND C/D ROADS - 100' (DOUBLE DELINEATORS) REFER TO STD. MD 665.05  
 RAMPS - REFER TO STD. MD 665.06

### TYPICAL SPACING FOR W-BEAM MOUNTED DELINEATORS

(FOR ALL W-BEAM BARRIERS WITHIN 6' OF THE SHOULDER)  
 MAINLINE - 100' **NOTE** SPACING SHOULD BE REDUCED TO 50' IN CURVES WITH A RADIUS LESS THAN 1000' AND IN TANGENT SECTIONS LESS THAN 500' IN LENGTH.  
 ACCEL/DECEL AND C/D ROADS - 100' (DOUBLE DELINEATORS) REFER TO STD. MD 665.05  
 RAMPS - REFER TO STD. MD 665.06

### **NOTE**

DELINEATORS LOCATED WITHIN 50' OF A UTILITY SHOULD BE INSTALLED AT THE UTILITY AND COMBINED WITH THE APPROPRIATE UIM(S).

SPECIFICATION <b>604, 605</b>	CATEGORY CODE ITEMS	
APPROVED	 DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT	
 State Highway Administration	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
	APPROVAL	APPROVAL <b>7-1-94</b>
	REVISED <b>11-08-06</b>	REVISED <b>10-25-06</b>
	REVISED	REVISED
	REVISED	REVISED

**Maryland Department of Transportation**  
**STATE HIGHWAY ADMINISTRATION**  
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

### **PLACEMENT OF DELINEATORS**

**STANDARD NO.**

**MD 665.03**