PROJECT DESCRIPTION

I. GENERAL:

THIS PORTION OF THE PROJECT INVOLVES THE INSTALLATION OF A HAZARD IDENTIFICATION BEACON IN THE CONCRETE MEDIAN OF MD 147 AND FIFTH AVENUE IN BALTIMORE COUNTY.

MD 147 IS ASSUMED TO RUN IN AN NORTH-SOUTH DIRECTION

INTERSECTION OPERATION

THE HAZARD IDENTIFICATION BEACONS WILL FLASH CONTINUOUSLY.

WIRING DIAGRAM

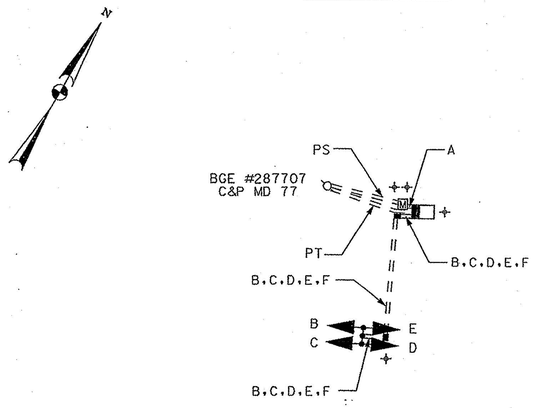

KEY

A	(3-WIRES) 1 CONDUCTOR ELECTRICAL CABLE NO. 4 AWG
B, C, D, E	3 CONDUCTOR ELECTRICAL CABLE (NO. 14 AWG)
F	STRANDED BARE COPPER GROUND WIRE (NO. 6 AWG)
PS	PROPOSED UNDERGROUND SERVICE FEED
PT	PROPOSED UNDERGROUND TELEPHONE FEED
+	3/4" DIA. X 10' LENGTH GROUND ROD
M	METERED SERVICE PEDESTAL

T3 DESIGN, P.C.
3927 OLD LEE HWY
SUITE 101-C
FAIRFAX, VA 22030
PHONE: 703-359-5861
www.t3design.us

BY: amym

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION

MD 147 HARFORD ROAD AND
FIFTH AVENUE

GENERAL INFORMATION SHEET

REVISIONS	
A ADDENDUM NUMBER 5 12 /12 /06	

SCALE NONE DATE 12 /12 /2006 CONTRACT NO. BA6835184

DESIGNED BY AJM COUNTY BALTIMORE
DRAWN BY JRL LOGMILE
CHECKED BY PAT T.I.M.S. NO.
F.A.P. NO. TOD NO.

DRAWING NO. TS 4911 SG - 2.10 OF 2.12 SHEET NO. 244 OF 291

PLOTTED: Wednesday, December 06, 2006 AT 02:15 PM
FILE: Z:\Project\06-0003 WRA MdSHA\Task 02 Harford Rd\CADD\06-PS&E Plans\pSG-F010_MD7.dgn