

PROJECT DESCRIPTION

GENERAL

THIS PROJECT INVOLVES THE RECONSTRUCTION OF THE EXISTING TRAFFIC CONTROL SIGNAL AND STREET LIGHTING AT THE INTERSECTION OF US 40 (PULASKI HIGHWAY) AND 66TH STREET IN BALTIMORE COUNTY, MARYLAND. US 40 (PULASKI HIGHWAY) IS ASSUMED TO RUN IN AN EAST-WEST DIRECTION.


INTERSECTION OPERATION

THE INTERSECTION OPERATION WILL REMAIN THE SAME.

CONTROLLER REQUIREMENTS

THE EXISTING BASE MOUNTED CABINET AND CONTROLLER WILL BE USED. THE CONTROLLER WILL BE RETROFITTED TO OPERATE VIDEO DETECTION EQUIPMENT.

PHASE CHART

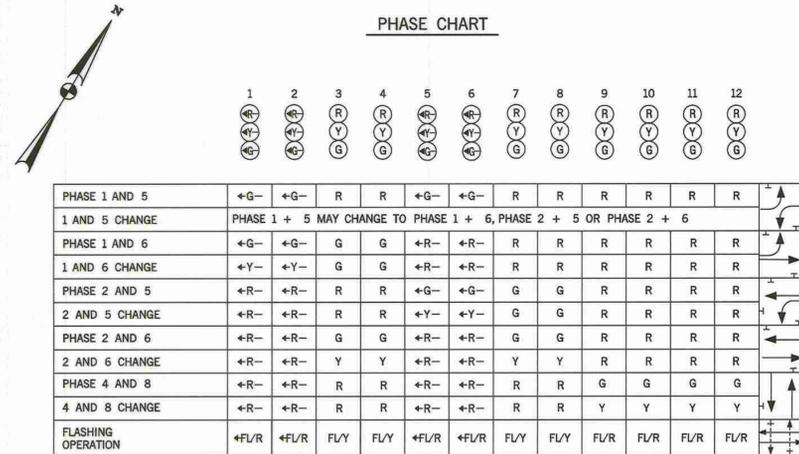

EQUIPMENT LIST "A"

A. EQUIPMENT TO BE SUPPLIED BY THE SHA

ITEM NO.	QUANTITY	DESCRIPTION
9086	1 EACH	VIDEO INTERFACE EQUIPMENT: 1-8 CAMERAS
9571	178+26 S.F.	SHEET ALUMINUM SIGNS TO CONSIST OF : - 4 EACH D-3(1) SIGN (VARIABLE x 16 IN.) DUAL FACED - MAST ARM MOUNT - 1 EACH ASSOCIATED SHIELD ASSEMBLY "EAST, US 40, RIGHT ARROW" (24 IN. x 48 IN.) - POLE MOUNT - 1 EACH ASSOCIATED SHIELD ASSEMBLY "WEST, US 40, LEFT ARROW" (36 IN. x 72 IN.) - POLE MOUNT - 1 EACH ASSOCIATED SHIELD ASSEMBLY "WEST, US 40, RIGHT ARROW" (24 IN. x 48 IN.) - POLE MOUNT - 1 EACH ASSOCIATED SHIELD ASSEMBLY "EAST, US 40, LEFT ARROW" (36 IN. x 72 IN.) - POLE MOUNT - 2 EACH D3-2(1) (72"x30") - GROUND MOUNT

EQUIPMENT LIST "C"

C. EQUIPMENT TO BE REMOVED AND RETURNED TO SHA

ALL REMOVED SIGNAL MATERIALS SHALL BECOME PROPERTY OF THE CONTRACTOR

MAINTENANCE OF TRAFFIC

THE FOLLOWING TRAFFIC CONTROL STANDARDS SHALL BE REFERENCED FOR THE PROJECT. ADDITIONAL TRAFFIC CONTROL STANDARDS MAY BE USED AS DIRECTED BY THE ENGINEER.

- STANDARD NO. MD-104.04-01 (SHOULDER WORK)
- STANDARD NO. MD-104.04-03 (LEFT LANE CLOSURE)
- STANDARD NO. MD-104.04-05 (RIGHT LANE CLOSURE)
- STANDARD NO. MD-104.04-13 (LEFT TURN BAY CLOSURE)
- STANDARD NO. MD-104.04-15 (INTERSECTION LEFT LANE, TURN BAY)

PROJECT CONTACTS

THE CONTACT PERSONS FOR SHA ARE AS FOLLOWS:

- MS. ERIN KUHN
ASSISTANT DISTRICT ENGINEER - TRAFFIC
PHONE: (410) 229-2381
- MR. ROBERT SYNDER
ASSISTANT CHIEF, TRAFFIC OPERATIONS DIVISION
PHONE: (410) 787-7631
- MR. ANDRE FUTRELL
ASSISTANT DISTRICT ENGINEER - MAINTENANCE
PHONE: (410) 229-2361
- MR. RICHARD L. DAFF, SR.
CHIEF, TRAFFIC OPERATIONS DIVISION
PHONE: (410) 787-7630
- MR. MIKE PASQUARIELLO
DISTRICT UTILITY ENGINEER
PHONE: (410) 229-2341

EQUIPMENT LIST "B"


B. EQUIPMENT TO BE FURNISHED AND/OR INSTALLED BY THE CONTRACTOR

ITEM NO.	QUANTITY	DESCRIPTION
1003	2 EACH	MAINTENANCE OF TRAFFIC
2001	3 C.Y.	TEST PIT EXCAVATION
8001	36 EACH	12 INCH LED SIGNAL HEAD SECTION
8008	2 EACH	REMOVE & DISPOSE MAT & EQUIP PER ASSIGN
8012	280 L.F.	SCHEDULE 80 RIGID PVC CONDUIT UP TO 4 INCHES - BORED
8014	415 L.F.	SCHEDULE 80 RIGID PVC CONDUIT UP TO 4 INCHES - TRENCHED
8016	375 L.F.	NO. 6 AWG STRANDED BARE COPPER GROUND WIRE
8017	1 EACH	METERED SERVICE PEDESTAL EMBEDDED
8018	65 L.F.	ELECTRICAL CABLE - 1 CONDUCTOR (NO. 4 AWG)
8019	7 EACH	FURNISH AND INSTALL ELECTRICAL HANDHOLE
8020	75 L.F.	ELECTRICAL CABLE - 5 CONDUCTOR (NO. 14 AWG)
8021	1715 L.F.	ELECTRICAL CABLE - 7 CONDUCTOR (NO. 14 AWG)
8022	405 L.F.	ELECTRICAL CABLE - 2 CONDUCTOR (NO. 12 AWG) TC
8028	4 EACH	FURNISH AND INSTALL VIDEO DETECTION CAMERAS AND CABLE ANY LENGTH
8029	4 EACH	FURNISH AND INSTALL MICROLOOP PROBE SETS UP TO 1000 FT. LEAD IN
8036	2 EACH	15 FT. LIGHTING ARM ON SIGNAL POLE WITH 250 WATT HPS LAMP & LUMINAIRE
8035	178+26 S.F.	INSTALL OVERHEAD OR GROUND MOUNTED SIGN (INCLUDING ALL HARDWARE)
8040	20 L.F.	FURNISH AND INSTALL 1" FLEXIBLE OR GALVANIZED DETECTOR SLEEVE
8055-A	2 EACH	TWIN MAST ARM POLE & 50 FOOT/70 FOOT MAST ARM
8057-A	1 EACH	CUT, CLEAN, GALVANIZE AND CAP TRAFFIC SIGNAL STRUCTURE
5058-A	65 L.F.	WOOD SIGN SUPPORTS 4 INCH X 6 INCH

WIRING DIAGRAM

WIRING KEY

- A, B, C, D, E, F, G, H, J, L, M, N, P, Q, R, S, T, U, V, W, X, Y, Z, AA, BB
- 7-CONDUCTOR ELECTRICAL CABLE (NO. 14 A.W.G.)
- 5-CONDUCTOR ELECTRICAL CABLE (NO. 14 A.W.G.)
- VIDEO CAMERA DETECTION LEAD-IN CABLE
- MICROLOOP PROBE LEAD-IN
- STRANDED BARE COPPER GROUND WIRE (NO. 6 A.W.G.)
- 2-CONDUCTOR ELECTRICAL CABLE (NO. 12 A.W.G.) TRAY CABLE
- 1-CONDUCTOR ELECTRICAL CABLE (NO. 4 A.W.G.)
- PE - PROPOSED UNDERGROUND ELECTRICAL SERVICE
- ML - MICROLOOP PROBE SET
- + - 3/4 IN. X 10 FT. GROUND ROD

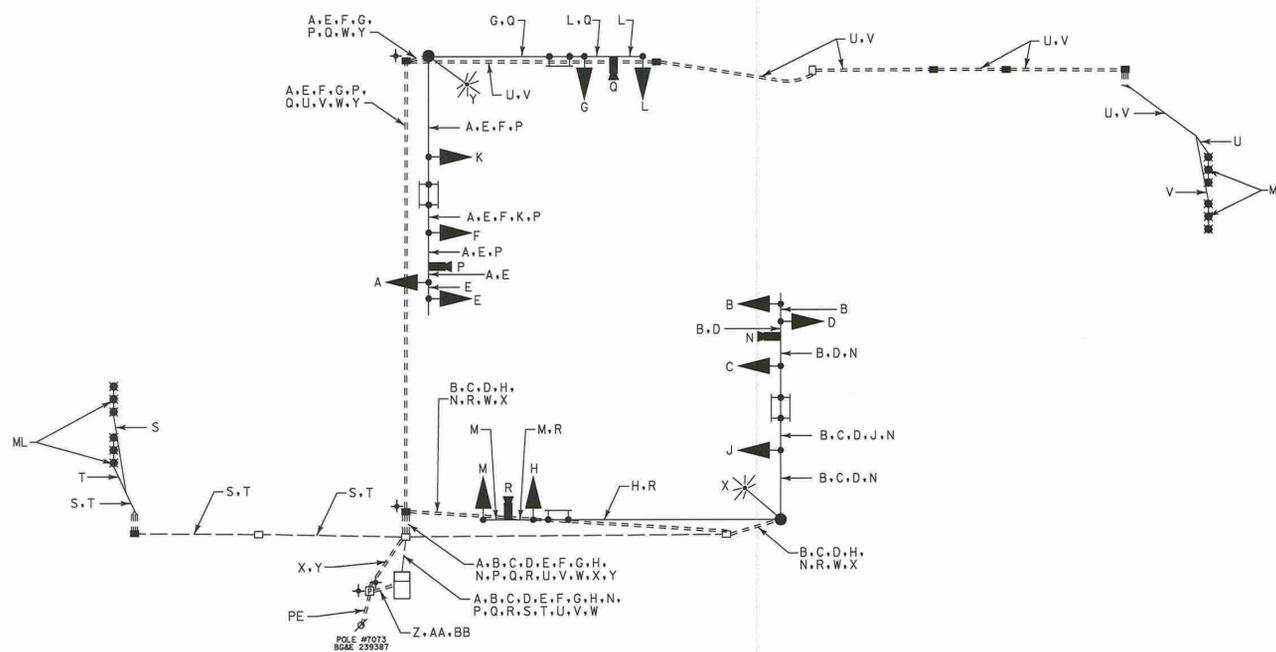

REVISION NO. 4-12-11
MODIFY SHIELD ASSEMBLY SIGNS
4/11/2011

SHA STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION
US 40 (PULASKI HIGHWAY) AT 66TH STREET
ROSEDALE, MARYLAND

GENERAL INFORMATION SHEET

SCALE NONE DATE JANUARY 19, 2011 CONTRACT NO. 3X3385185

DESIGNED BY L. WAESCHE COUNTY BALTIMORE
DRAWN BY L. WAESCHE LOGMILE
CHECKED BY N. LEARY TMS NO. K721
F.A.P. NO. TOD NO.

TS NO. 889-B DRAWING TSP-2 OF 2 SHEET NO. 2 OF 2

WR&A
WHITMAN, REQUARDT & ASSOCIATES, LLP
801 South Caroline Street, Baltimore, Maryland 21231

PLOTTED: 04-11-2011
FILE: N:\31669-107\CADD\Redline\RL_66G-N002_K721.dgn