## PROJECT DESCRIPTION

#### I. GENERAL

This project involves the modification of the existing traffic signal to provide "flashing red arrow" operations for southbound MD 272 to northbound I—95 in North East, Maryland. MD 272 is assumed to run in a north-south direction.

### II. INTERSECTION OPERATION

- 1. The intersection will operate in a NEMA 4-phase, semi-actuated mode with exclusive-permissive flashing red arrow left turn phasing for the southbound MD 272 approach.
- The existing NEMA full-traffic-actuated, eight (8) phase controller housed in a NEMA 6 base mounted cabinet is utilized at this location.

### NOTES

- The contractor shall be responsible for terminating all signal cable to the appropriate terminals and properly labeling each cable.
- 2. All underground and overhead utilities shown on these plans are schematic only and may not be complete. The Contractor shall be responsible for notifying Miss Utility prior to construction so that all utilities may be located in the field. If the Contractor perceives that a conflict between the utilities and the traffic signal will occur, the Contractor shall notify the Project Engineer immediately so that the conflict may be resolved.
- The contractor shall maintain the continuous operation of all interconnect, vehicular, pedestrian detectors, and lighting devices. If any device is damaged by the contractor, it shall be repaired within 72 hours by the contractor at no cost to the Administration after notification by the Engineer.

#### CONTACTS

DISTRICT 2

OFFICE OF TRAFFIC AND SAFETY

MR. TERRY O. WRIGHT DISTRICT ENGINEER 410-810-3210

CHIEF, TRAFFIC OPERATIONS

MR. JEFFERY WENTZ ASSISTANT DISTRICT ENGINEER - TRAFFIC

410-810-3240

MR. BARRY CLOTHIER

UTILITY ENGINEER 410-810-3275

MR. WM NORRIS EMBERT ASSISTANT DISTRICT ENGINEER - CONSTRUCTION

410-810-3270

MR. MIKE LEWIS ASSISTANT DISTRICT ENGINEER - MAINTENANCE

410-810-3250

MR. RICHARD DAFF SR.

410-787-7630

MR. ROBERT SNYDER

ASSISTANT DIVISION CHIEF, TRAFFIC OPERATIONS 410-787-7630

MR. ED RODENHIZER

TEAM LEADER SIGNAL OPERATIONS

410-787-7650

MR. EUGENE BAILEY TEAM LEADER SIGN OPERATIONS

410-787-7670

SUPPLY OFFICER IV (SIGNAL SHOP WAREHOUSE) 410-787-7668

MR. MIKE STOCKER

# EQUIPMENT LIST


A. EQUIPMENT TO BE FURNISHED BY THE ADMINISTRATION


ITEM NO. QUANTITY 9571 SHEET ALUMINUM POLE MOUNTED SIGNS CONSISTING OF: 12 R10-12 (2) (48"X36") MAST ARM MOUNT (1 EA)

# B. EQUIPMENT TO BE FURNISHED AND/OR INSTALLED BY CONTRACTOR

ITEM NO	• DESCRIPTION	UNITS	QUANTITY
1001	MAINTENANCE OF TRAFFIC	EA	1
6004	TRAFFIC BARRIER W BEAM USING 6 FOOT POST	LF	24.5
6007	W BEAM BARRIER REFLECTIVE DELINEATORS	EA	1
8001	12 INCH LED SIGNAL HEAD	EA	9
8005	ADJUST HANDHOLE TO GRADE WITH NEW FRAME AND COVER	EΑ	1
8023	REMOVE & DISPOSE OF EQUIPMENT (PER ASSIGNMENT)	EA	1
8040	INSTALL OVERHEAD OR GROUND MOUNTED SIGN (INCLUDING ALL HARDWARE)	SF	12
8055	ELECTRICAL CABLE - 5 CONDUCTOR (NO. 14 AWG)	LF	100

C. ALL MATERIALS TO BE REMOVED BY THE CONTRACTOR SHALL BECOME THE PROPERTY OF THE CONTRACTOR.

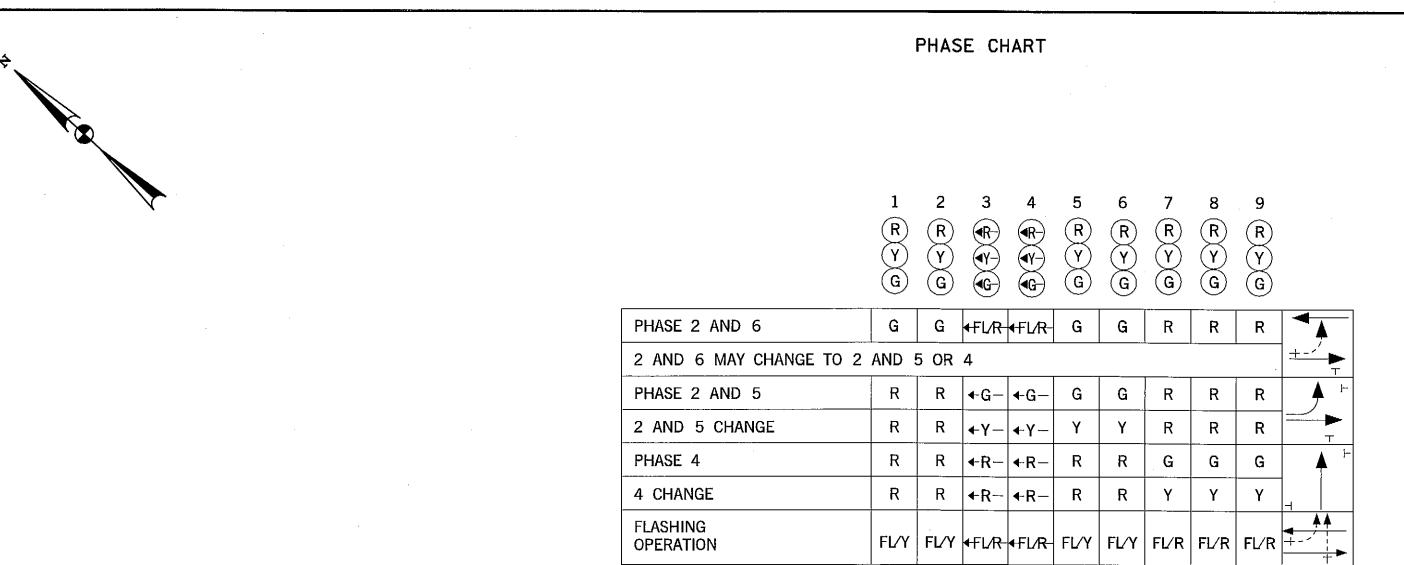

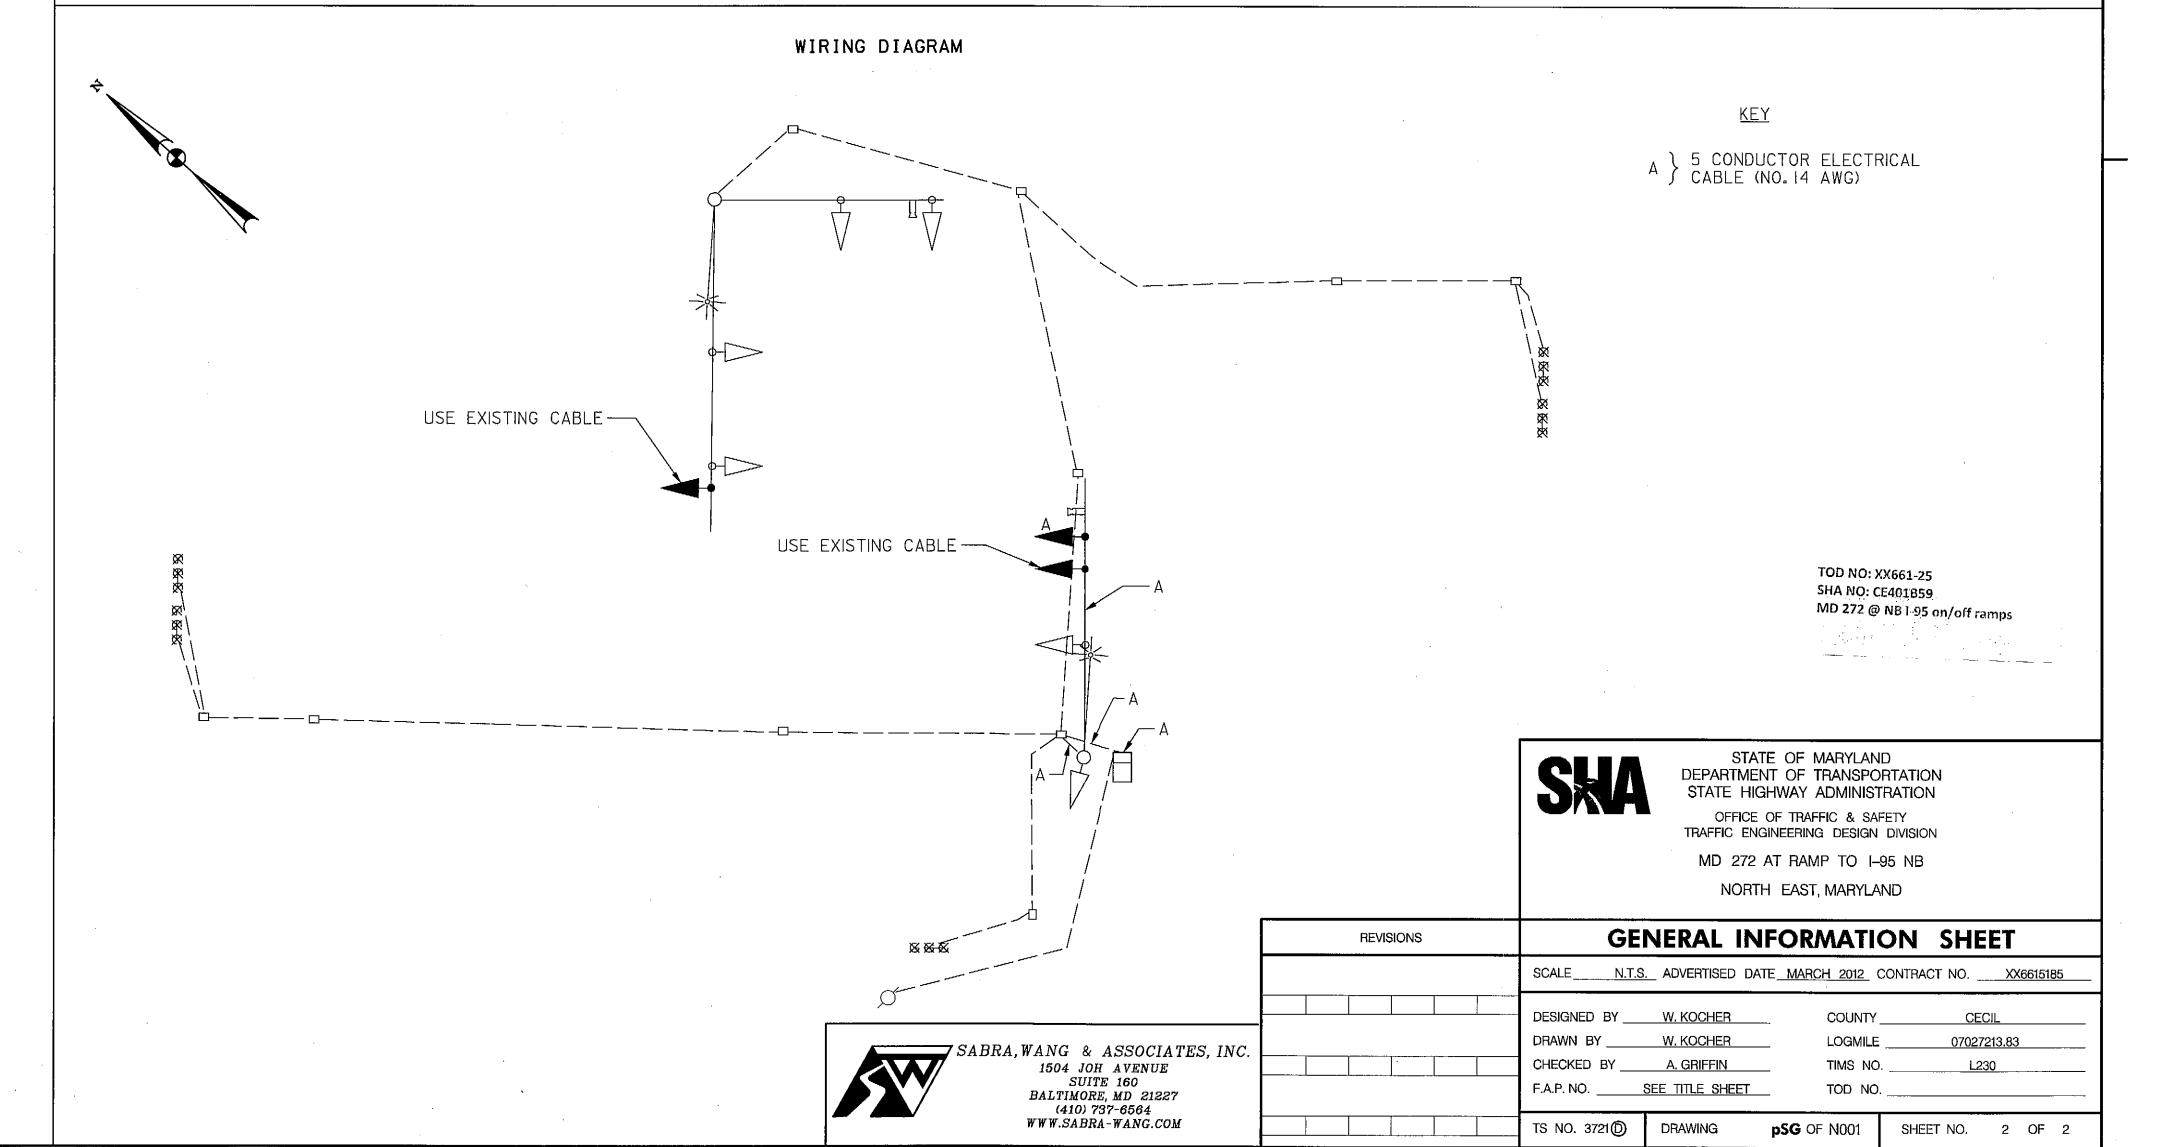

FILE: R:\2008\73 SHA BCS 2008-05A\_TEDD DESIGN\_STV\_JV\_\$5M\Task 196 MD 272 at NB I-95 Signal Mod\Dwg\pSG-N000\_L230.dgn