

TEMPORARY TRAFFIC CONTROL TYPICAL APPLICATION PLACEMENT OF REGULATORY SPEED SIGNS PROJECT GREATER THAN 2 MONTHS IN DURATION

NOTES:
THE PLACEMENT OF THE REGULATORY SPEED SIGNS VARIES AS DIRECTED BY THE ENGINEER.

* ADDITIONAL SPEED LIMIT SIGNS MAY BE REQUIRED AND SPACED AT ABOUT 1000 FT AND 1/2 MILE FOR LOW AND HIGH SPEED ROADWAYS RESPECTIVELY, AS DIRECTED BY THE ENGINEER.

NOTE:
IF NO TEMPORARY SPEED REDUCTION IS IN EFFECT, WORK AREA SIGNS SHOULD NOT DISPLAY 'FINES DOUBLE' MESSAGE.

ALL REGULATORY SPEED LIMIT SIGNS WITHIN THE WORK ZONE SHALL DISPLAY 'WORK AREA' MESSAGE.

KEY:

- ■ CHANNELIZING DEVICES
- ← SIGN SUPPORT
- ← FACE OF SIGN
- ↑ DIRECTION OF TRAFFIC
- ▨ WORK SITE
- ARROW PANEL


NOTE:
A MEMORANDUM OF ACTION (MOA) FOR TEMPORARY SPEED LIMIT REDUCTIONS IN WORK ZONES MUST BE IN EFFECT OR REGULATORY SIGNS ERECTED WITHIN THE WORK ZONE ARE NOT ENFORCEABLE. IN ORDER TO OBTAIN AN MOA FOR A TEMPORARY SPEED LIMIT REDUCTION WITHIN A WORK ZONE, THE FOLLOWING MUST BE COMPLETED:

- A TRAFFIC ENGINEERING STUDY THAT ANALYZES TRAFFIC CONDITIONS DURING CONSTRUCTION.
- A DETERMINATION OF THE CONDITIONS THAT NECESSITATE THE REDUCED SPEED LIMIT.
- A RECOMMENDATION OF THE APPROPRIATE SPEED LIMIT, BASED ON TRAFFIC CONDITIONS.
- A STATEMENT OF THE EXTENT OF THE WORK ZONE WHERE THE TEMPORARY SPEED LIMIT REDUCTION IS TO BE ENFORCED.

THE MOA FOR TEMPORARY SPEED LIMIT REDUCTIONS IS CONSIDERED 'IN EFFECT' UPON APPROVAL OF THE DISTRICT ENGINEER.

* * MAINTAIN MINIMUM 300' SPACING BETWEEN SIGNS

THERE SHALL BE A MINIMUM OF SEVEN CHANNELIZING DEVICES IN THE SHOULDER TAPER.

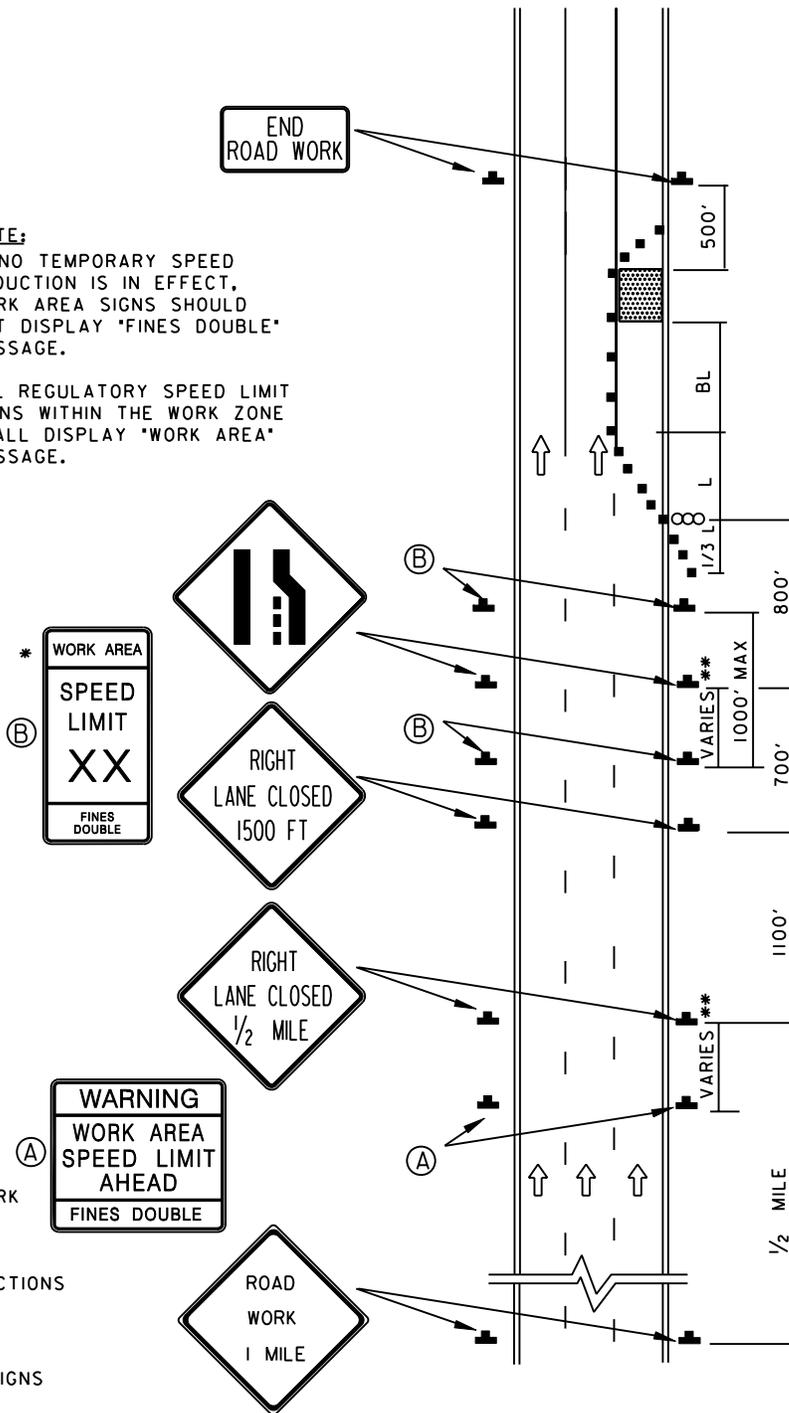

SPECIFICATION	CATEGORY CODE ITEMS
APPROVED	 DIRECTOR - OFFICE OF TRAFFIC AND SAFETY
SHA State Highway Administration	APPROVAL • SHA REVISIONS
	APPROVAL 8-20-03
	REVISED 8-11-10
	REVISED
APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	APPROVAL 9-23-03
REVISED 10-5-10	REVISED
REVISED	REVISED
REVISED	REVISED

**Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION**
STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

REGULATORY SPEED SIGNS

STANDARD NO.

MD 104.01-07