



- ① 5" JOINTED PLAIN CONCRETE - MIX #7. MAXIMUM JOINT SPACING SHALL BE 6'. NO LOAD TRANSFER DEVICES ARE NEEDED. REFER TO STD. NO. MD 577.07.
- ② 6" GRADED AGGREGATE BASE

PARK & RIDE - RIGID PAVEMENT SECTION - PASSENGER VEHICLES

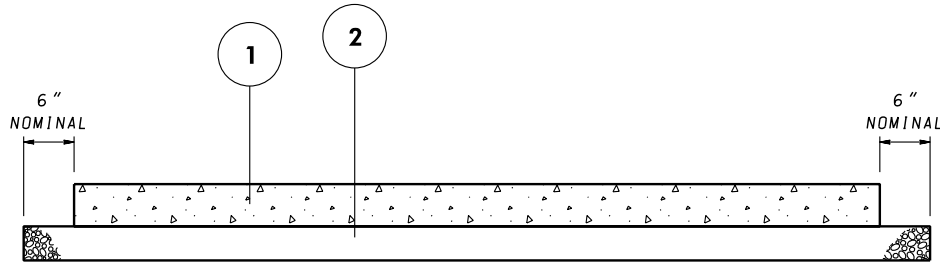

- ① 9" JOINTED PLAIN CONCRETE - MIX #7. REFER TO STD. NOS. MD 572.21, MD 572.61 AND MD 572.91
- ② 6" GRADED AGGREGATE BASE

PARK & RIDE - RIGID PAVEMENT SECTION - BUS LANE AND BUS STOP PAD

SPECIFICATION	CATEGORY CODE ITEMS
APPROVED	<i>[Signature]</i> DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT
	APPROVAL • SHA REVISIONS
	APPROVAL 2-25-16
	REVISED
	REVISED

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
PARK & RIDE PAVEMENT SECTIONS
RIGID PAVEMENT

STANDARD NO. MD 580.07