



- THE JUNCTION BOXES SHALL BE LOCATED EVERY 500 FEET. AS SHOWN ON THE PLANS. OR AS DIRECTED BY THE ENGINEER.
- THE COST OF THE CONDUITS, JUNCTION BOXES, AND APPURTENANCES SHALL BE INCIDENTAL TO THE COST OF THE BARRIER UNLESS OTHERWISE SPECIFIED.
- IN INSTANCES WHERE THE BARRIER CONNECTS TO A BRIDGE PARAPET CONTAINING CONDUIT THE CONDUITS SHALL TRANSITION TO ALIGN WITH THE BRIDGE CONDUITS.
- 4. CAP CONDUIT FOR FUTURE USE OR CONNECT TO JUNCTION WELL PER LIGHTING PLANS.
- 5. REFER TO SECTION 805 FOR CONDUIT. ETC.
- CONDUIT SHALL EXIT CONCRETE BARRIER USING CONDUIT BENDS AND SWEEPS. NOT BY EXITING THROUGH THE BOTTOM OF THE JUNCTION BOX.
- 7. JUNCTION BOXES SHALL BE GALVANIZED STEEL WITH COVERS MOUNTED IN THE FRONT OF THE CONCRETE BARRIER. FACE OF COVER SHALL BE FLUSH WITH FACE OF CONCRETE BARRIER. COVER SHALL BE 1/4" THICK GALVANIZED STEEL.
- 8. PIPE AND EXPANSION FITTINGS SHALL BE U.L. APPROVED FOR ENCASEMENT IN CONCRETE.
- 9. JUNCTION BOXES SHALL HAVE '2" DIA. HOLES AT LOW POINT OF JUNCTION BOX. INSTALL '2" DIA. DRAIN PIPE AT LOW POINT AND OUTLET AT BACK OF BARRIER.
- 10. JUNCTION BOX COVERS SHALL INCLUDE TAMPER RESISTANT BOLTS.
- 11. CUT VERTICAL AND HORIZONTAL BARS IN CONFLICT WITH JUNCTION BOX AND REINFORCE AROUND BOX AS SHOWN ON STANDARD NO. MD 648.50-04. EPOXY TOUCH UP CUT BARS.
- 12. PLACE PVC EXPANSION COUPLING AT BARRIER EXPANSION JOINTS.

SPECIFICATION CATEGORY CODE ITEMS

ELEVATION B-B

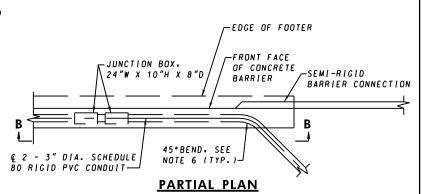

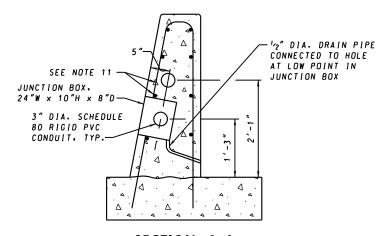

SECTION A-A

CONDUIT LAYOUT AT LOWER JUNCTION BOX. LAYOUT AT UPPER JUNCTION BOX SIMILAR

604		<i>a</i> .	
APPROVED CSCAN Former L			ODI JENIT
DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT			
APPROVAL SHA	<u>.</u>	APPROVAL FEDERAL	
REVISIONS		HIGHWAY ADMINISTRATION	
APPROVAL	6-27-23	APPROVAL 6	-21-23
REVISED		REVISED	
REVISED		REVISED	
REVISED		REVISED	

MARYLAND DEPARTMENT OF TRANSPORTATION

STATE HIGHWAY ADMINISTRATION

STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
CONDUIT AND JUNCTION BOX LOCATION FOR
42 INCH SINGLE SLOPE CONCRETE
TRAFFIC BARRIER SINGLE FACE

STANDARD NO.

MD 648.50-02