


ROUND POLE DATA

MOUNTING HEIGHT H FT.	ARM LENGTH B FT.	POLE DIA. BOTTOM IN.	BASE PLATE		BOLT CIRCLE IN.
			THICKNESS IN.	SIDE IN.	
30	4 TO 10	7 1/2	1	12	13 1/2
30	15	8	1	12	13 1/2
30	20	8 1/2	1	12	13 1/2
30	25	9	1	13	13 1/2
30	30	9 1/2	1 1/4	13	15
40	4 TO 20	9 1/2	1	13	13 1/2
40	25	10 1/2	1 1/4	15	15
40 NB	30	11	1 1/4	15 5/8	15
40 NB	35	12	1 1/2	17	16
50	4	10 1/2	1	15	13 1/2
50	6 TO 15	10 1/2	1 1/4	15	15
50 NB	20	10 1/2	1 1/4	15	15
50 NB	25	12	1 1/4	17	16
50 NB	30	13	1 1/2	18	17

MOUNTING HEIGHT
H

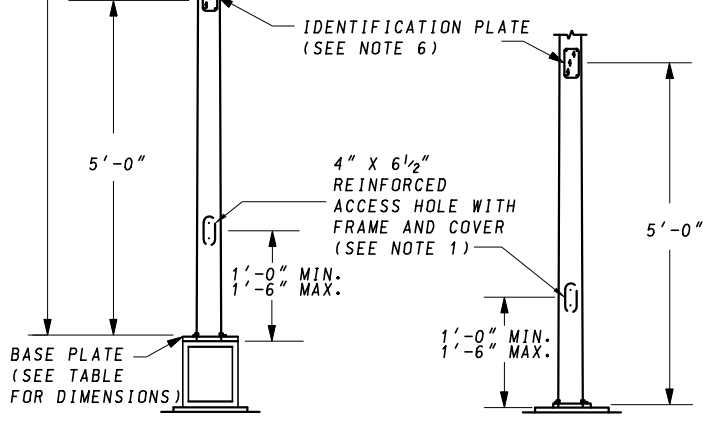

**BREAKAWAY
TRANSFORMER BASE
(WHERE REQUIRED)**

**NON-BREAKAWAY
BASE**

NOTES:

- HANDHOLES AND TRANSFORMER BASE OPENINGS SHALL BE INSTALLED ON THE SIDE OF THE POLE FACING AWAY FROM TRAFFIC.
- MOUNTING HEIGHT SHALL BE MEASURED FROM THE CENTER OF THE LUMINAIRE TO THE TOP OF THE POLE BASE PLATE.
- BRACKET ARM ATTACHMENT SHALL BE PROVIDED AS NOTED.
- POLE TAPER: 0.1" TO 0.14" PER FOOT OF LENGTH
- TWO PIECE POLE SHAFT MAY BE USED FOR POLES 50' OR HIGHER.
- IDENTIFICATION PLATE SHALL BE PLACED ON SIDE OF POLE FACING TRAFFIC.
- "NB" SIGNIFIES THAT POLE SHALL NOT BE USED ON BREAKAWAY BASE.
- REFER TO LIGHTING STRUCTURE FOUNDATION STANDARD PLATE FOR ANCHOR BOLT REQUIREMENTS.

SPECIFICATION 808	CATEGORY CODE ITEMS
APPROVED	<i>Cedric Wald</i> DIRECTOR - OFFICE OF TRAFFIC AND SAFETY
APPROVAL SHA REVISIONS	APPROVAL FEDERAL HIGHWAY ADMINISTRATION
APPROVAL 7-1-94	APPROVAL 7-1-94
REVISED 5-17-07	REVISED 5-2-07
REVISED 4-16-19	REVISED 4-1-19
REVISED	REVISED

MDOT MARYLAND DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION

STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
LIGHTING STRUCTURE WITH BRACKET ARM

STANDARD NO. MD 808.01