



NOTES

1. THE TRAFFIC BARRIER THRIE BEAM ANCHORAGE AT BRIDGE END POSTS SHALL BE PLACED ON SLOPES 10:1 OR FLATTER.
2. THIS TYPE OF ANCHORAGE SHALL APPLY TO ALL FOUR CORNERS OF THE BRIDGE WHERE APPLICABLE.
3. THE WOOD POSTS AND BLOCKS SHALL HAVE A STRESS GRADE OF 1200 PSI OR MORE.
4. RECTANGULAR WASHERS SHALL BE USED AT THE TERMINAL CONNECTOR AND POSTS A THROUGH F.
5. DETAILS OF THE THRIE BEAM, SPLICE, TERMINAL CONNECTOR, TRANSITION SECTION, SQUARE PLATE WASHERS, RECTANGULAR PLATE WASHERS AND SECTION C-C ARE SHOWN ON STD. MD 661.02.

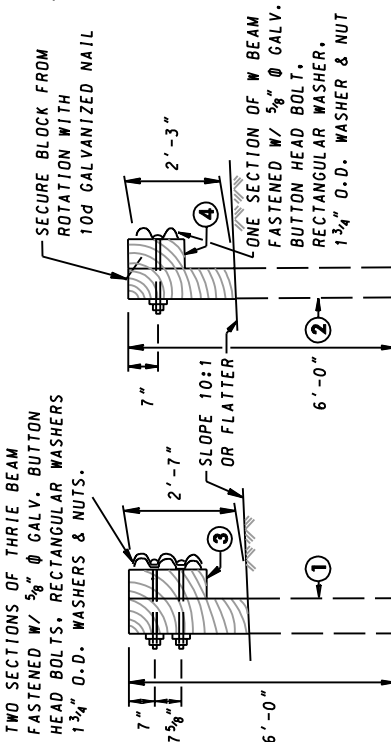


SECTION A-A

SECTION B-B

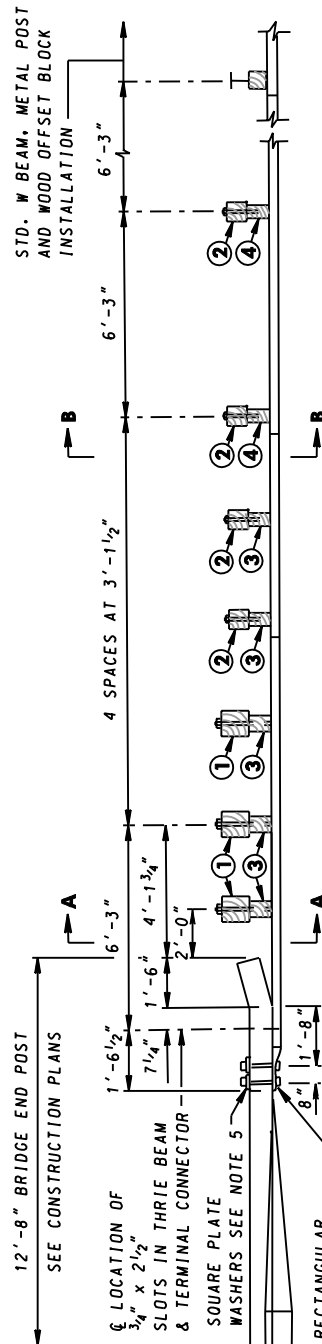

WOOD POST & BLOCK DIMENSIONS	
①	10" x 10" x 6' - 0"
②	8" x 8" x 6' - 0"
③	6" x 8" x 22 1/2"
④	6" x 8" x 14"

PLAN

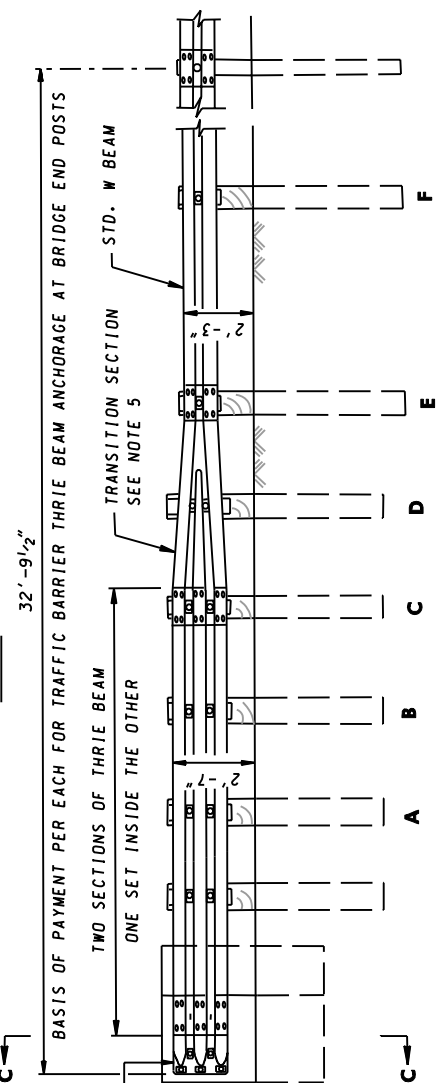

ELEVATION

SPECIFICATION
605

CATEGORY CODE ITEMS

APPROVED *Kirk G. McCall*
DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT



APPROVAL • SHA REVISIONS		APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	
APPROVAL	4-27-89	APPROVAL	5-5-89
REVISED	10-1-01	REVISED	6-26-92
REVISED		REVISED	
REVISED		REVISED	

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

TRAFFIC BARRIER THRIE BEAM
ANCHORAGE AT BRIDGE END POSTS

STANDARD NO. MD 661.01