



CONSTRUCTION DETAILS

- A. Install base mounted NEMA base cabinet/controller, and necessary equipment.
- B. Install 27 ft. steel mast arm pole with 60 ft. mast arm, vehicle signal heads, signs, video detection camera, 20 ft. luminaire arm, and 250 watt HPS luminaire. (Note: one 3 in. PVC conduit bend).
- C. Install 27 ft. steel mast arm pole with 3 ft. extension pole for relocated CCTV camera, 50 ft. mast arm, vehicle signal heads, signs, video detection camera, 20 ft. luminaire arm, and 250 watt HPS luminaire. (Note: one 3 in. PVC conduit bend).
- D. Use existing mast arm pole install video detection camera, and sign. Replace existing signal heads with LED heads.
- E. Install handhole.
- F. Install 3 in. polyvinyl chloride [Schedule 80] electrical conduit - trenched.
- G. Install 3 in. polyvinyl chloride [Schedule 80] electrical conduit - slotted prior to final overlay.
- H. Install 4 in. polyvinyl chloride [Schedule 80] electrical conduit - trenched.
- J. Install 4 in. polyvinyl chloride [Schedule 80] electrical conduit - slotted prior to final overlay.
- K. Install Non-Invasive micro-loop (set of 3) with 1000 ft. lead-in cable.
- L. Install 24 in. wide Heat Applied Thermoplastic pavement marking - white for stop line.
- M. Use existing conduit.
- N. Use existing handhole.
- O. Install handhole on existing conduit run.
- P. Remove existing cabinet and controller and all attached equipment.
- Q. Remove existing masts arm pole and all attached equipment.
- R. Remove existing mast arm pole and all attached equipment. Relocate existing CCTV Camera to new mast arm pole.
- S. Remove existing handhole.
- T. Cap and abandon existing conduit.
- U. Abandon existing detector.
- V. Video camera detection zone.
- W. Use existing metered service pedestal for underground/ electrical service per MD-SHA Typical 807.05-01.
- X. Install 2 in. polyvinyl chloride [Schedule 80] electrical conduit - trenched.
- Y. Install 1-1/4 inch inner duct for camera cable assembly.
- Z. Use existing cabinet for CCTV camera equipment connections.
- a. Use existing conduit for phone drop.


REPLACE EXISTING SIGNALS



PROPOSED SIGNALS



PROPOSED NEMA PHASING

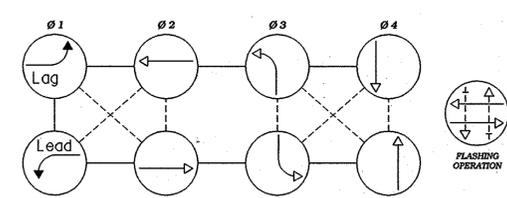

NEMA notes:
Phases associated by a dashed line will operate concurrently.
Phases associated by a solid line will not operate concurrently.
Phase 01 will lag behind phases 02 & 06


RELOCATED CCTV CAMERA





PROPOSED CAMERAS



EXISTING SIGN

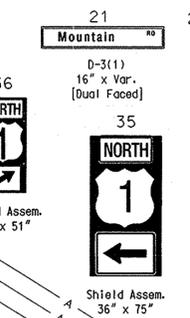

PROPOSED SIGNS

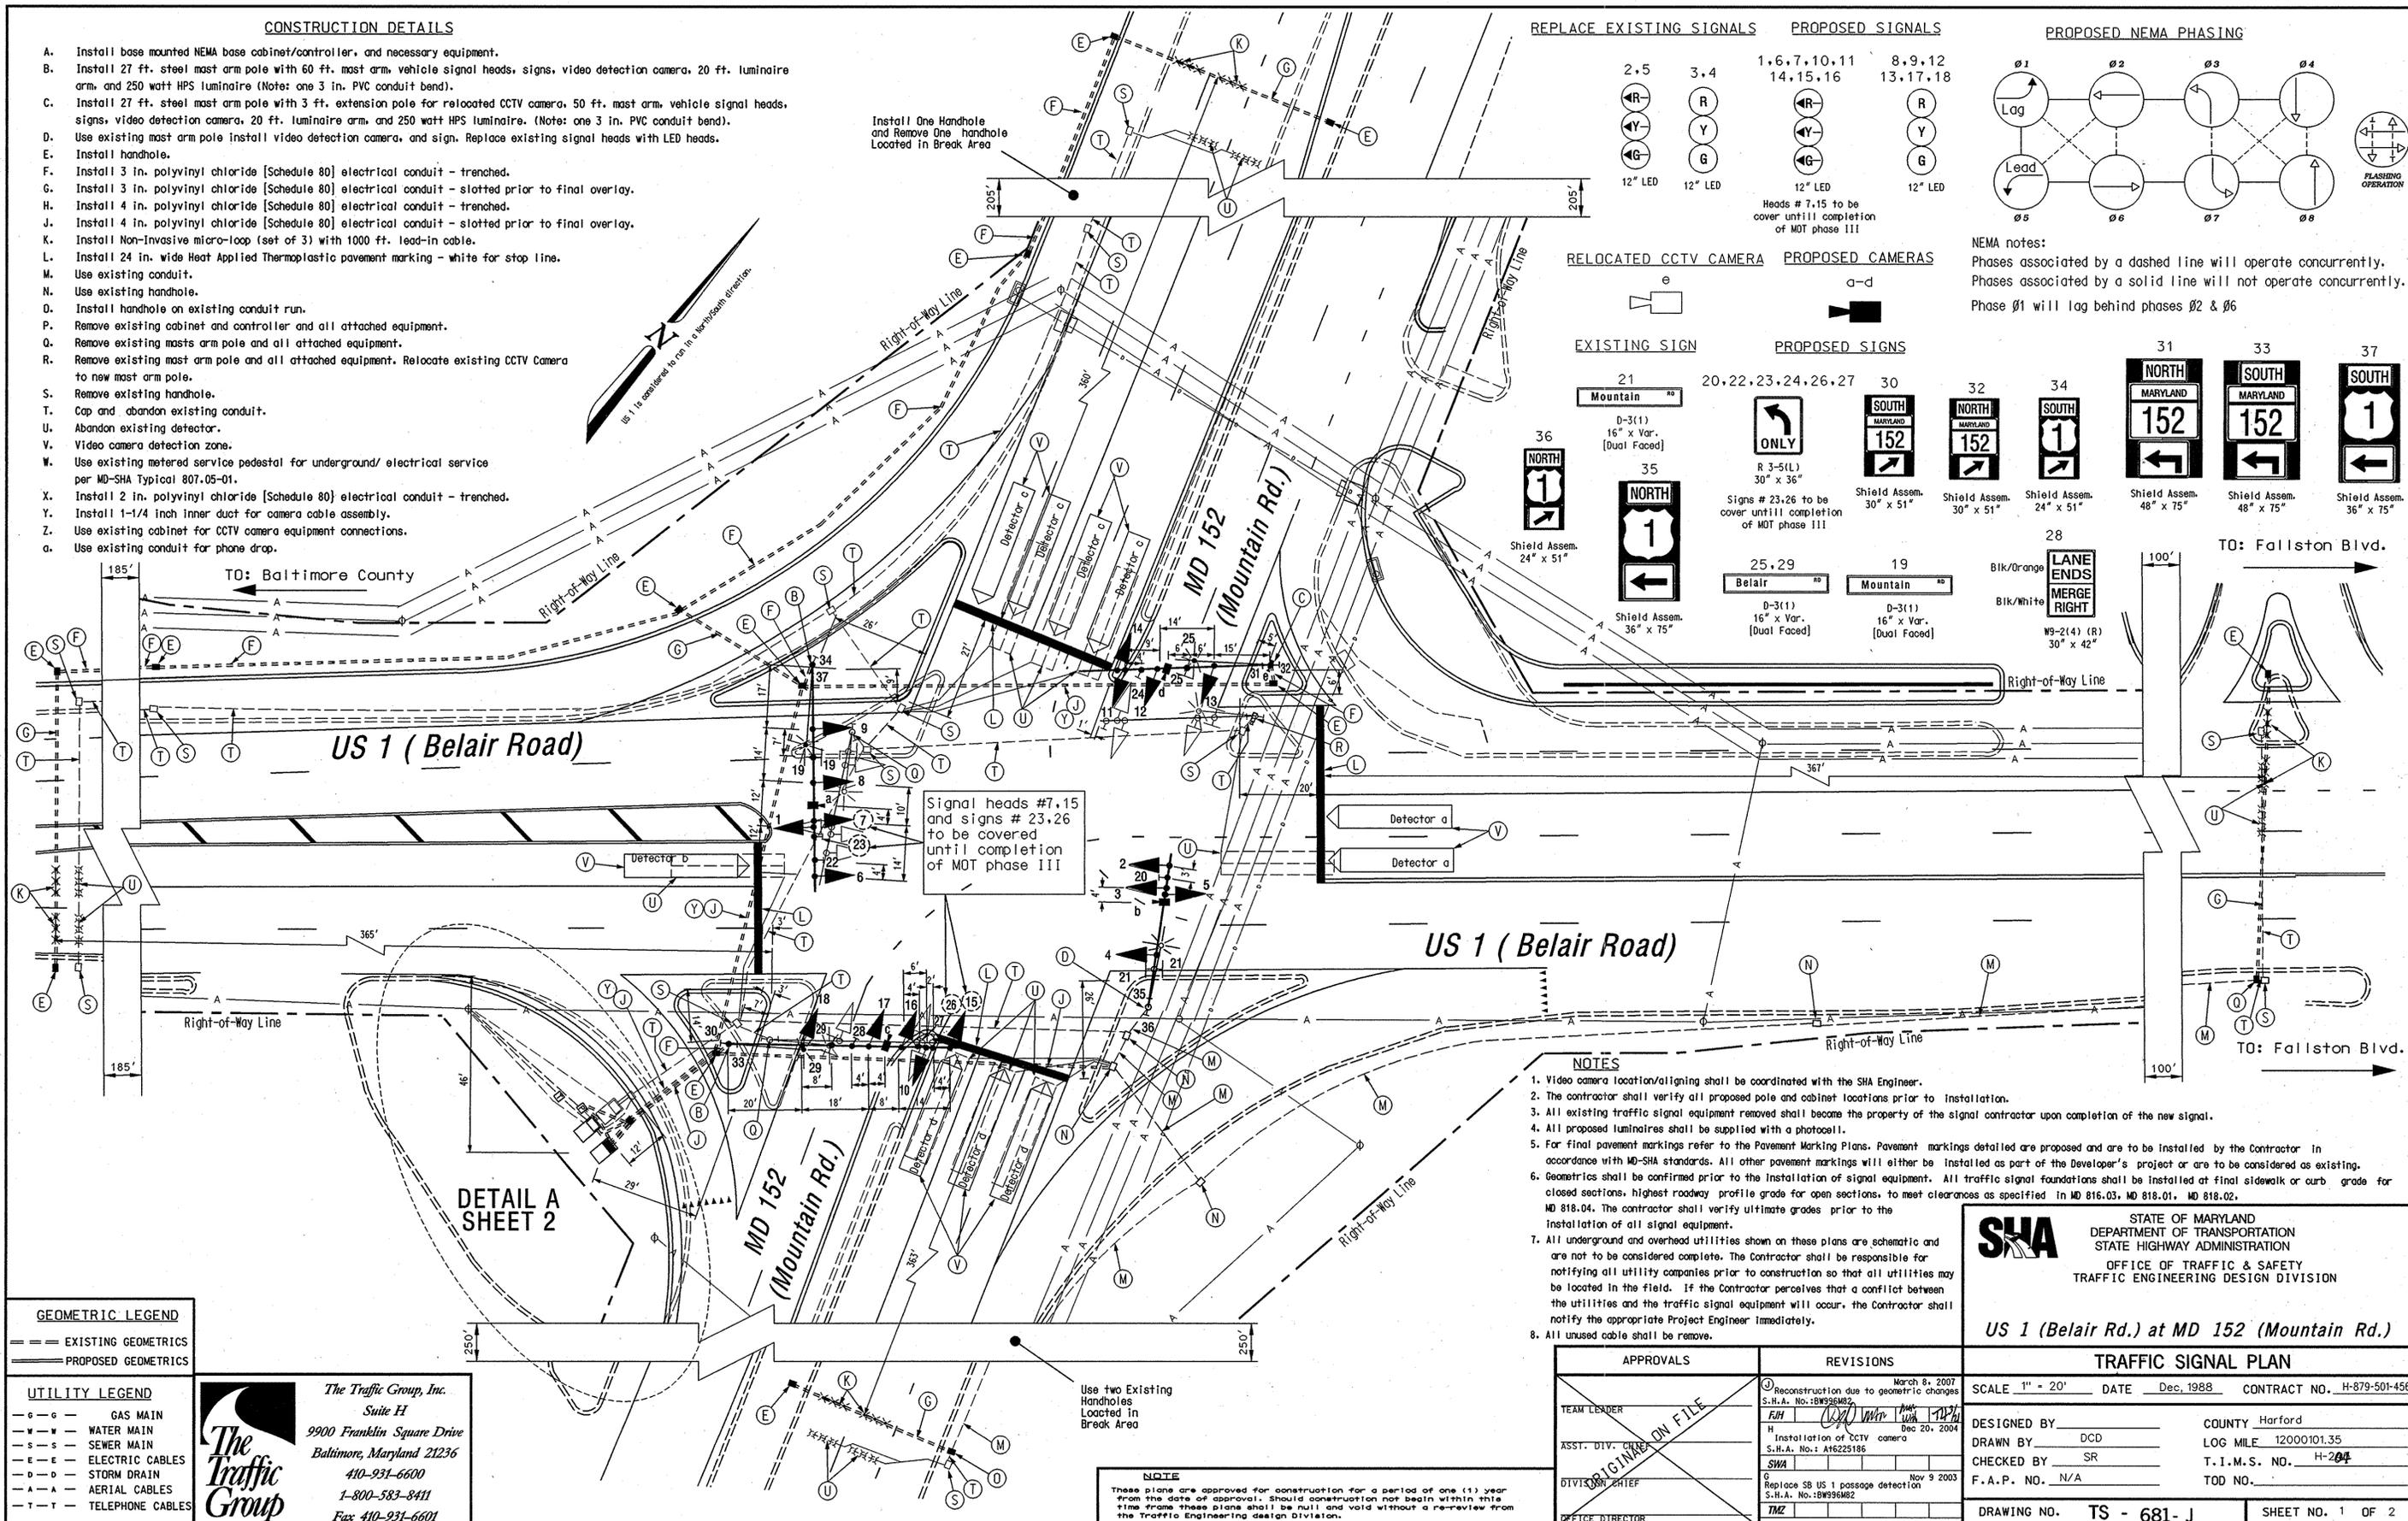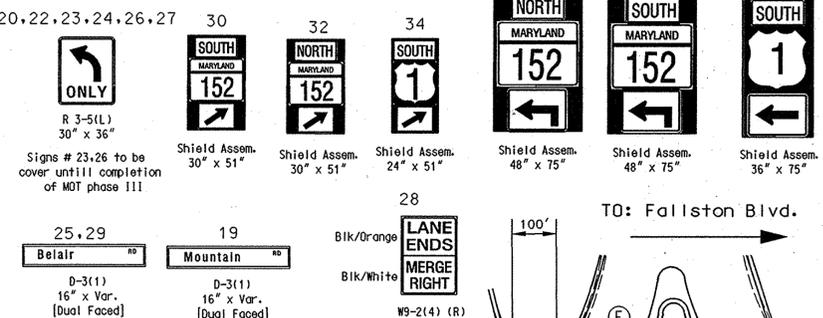

Signal heads #7,15 and signs # 23,26 to be covered until completion of MOT phase III

NOTES

1. Video camera location/aligning shall be coordinated with the SHA Engineer.
2. The contractor shall verify all proposed pole and cabinet locations prior to installation.
3. All existing traffic signal equipment removed shall become the property of the signal contractor upon completion of the new signal.
4. All proposed luminaires shall be supplied with a photocell.
5. For final pavement markings refer to the Pavement Marking Plans. Pavement markings detailed are proposed and are to be installed by the Contractor in accordance with MD-SHA standards. All other pavement markings will either be installed as part of the Developer's project or are to be considered as existing.
6. Geometrics shall be confirmed prior to the installation of signal equipment. All traffic signal foundations shall be installed at final sidewalk or curb grade for closed sections, highest roadway profile grade for open sections, to meet clearances as specified in MD 816.03, MD 818.01, MD 818.02, MD 818.04. The contractor shall verify ultimate grades prior to the installation of all signal equipment.
7. All underground and overhead utilities shown on these plans are schematic and are not to be considered complete. The Contractor shall be responsible for notifying all utility companies prior to construction so that all utilities may be located in the field. If the Contractor perceives that a conflict between the utilities and the traffic signal equipment will occur, the Contractor shall notify the appropriate Project Engineer immediately.
8. All unused cable shall be removed.

GEOMETRIC LEGEND

---	EXISTING GEOMETRICS
---	PROPOSED GEOMETRICS

UTILITY LEGEND

—○—	GAS MAIN
—W—	WATER MAIN
—S—	SEWER MAIN
—E—	ELECTRIC CABLES
—D—	STORM DRAIN
—A—	AERIAL CABLES
—T—	TELEPHONE CABLES

The Traffic Group, Inc.
Suite H
9900 Franklin Square Drive
Baltimore, Maryland 21236
410-931-6600
1-800-583-8411
Fax 410-931-6601

NOTE
These plans are approved for construction for a period of one (1) year from the date of approval. Should construction not begin within this time frame these plans shall be null and void without a re-review from the Traffic Engineering Design Division.

APPROVALS	REVISIONS
TEAM LEADER ASST. DIV. CHIEF DIVISION CHIEF OFFICE DIRECTOR	March 8, 2007 S.H.A. No. 08W55062 Reconstruction due to geometric changes Dec 20, 2004 H Installation of CCTV camera S.H.A. No. A16225186 Nov 9 2003 G Replace SB US 1 passage detection S.H.A. No. 08W55062 THZ

SHA STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION

US 1 (Belair Rd.) at MD 152 (Mountain Rd.)

TRAFFIC SIGNAL PLAN		
SCALE 1" = 20'	DATE Dec, 1988	CONTRACT NO. H-879-501-456
DESIGNED BY	DCD	COUNTY Harford
DRAWN BY	SR	LOG MILE 12000101.35
CHECKED BY	N/A	T. I. M. S. NO. H-204
F.A.P. NO.		TOD NO.
DRAWING NO. TS - 681-J	SHEET NO. 1 OF 2	

DRILL HOLES

DRILL HOLES

DRILL HOLES

17/00012001-0208-Draft Coord files 4-10-06-13-1511-101252.dgn 3/21/2007