



US 13B IS ASSUMED TO RUN
IN AN NORTH-SOUTH DIRECTION

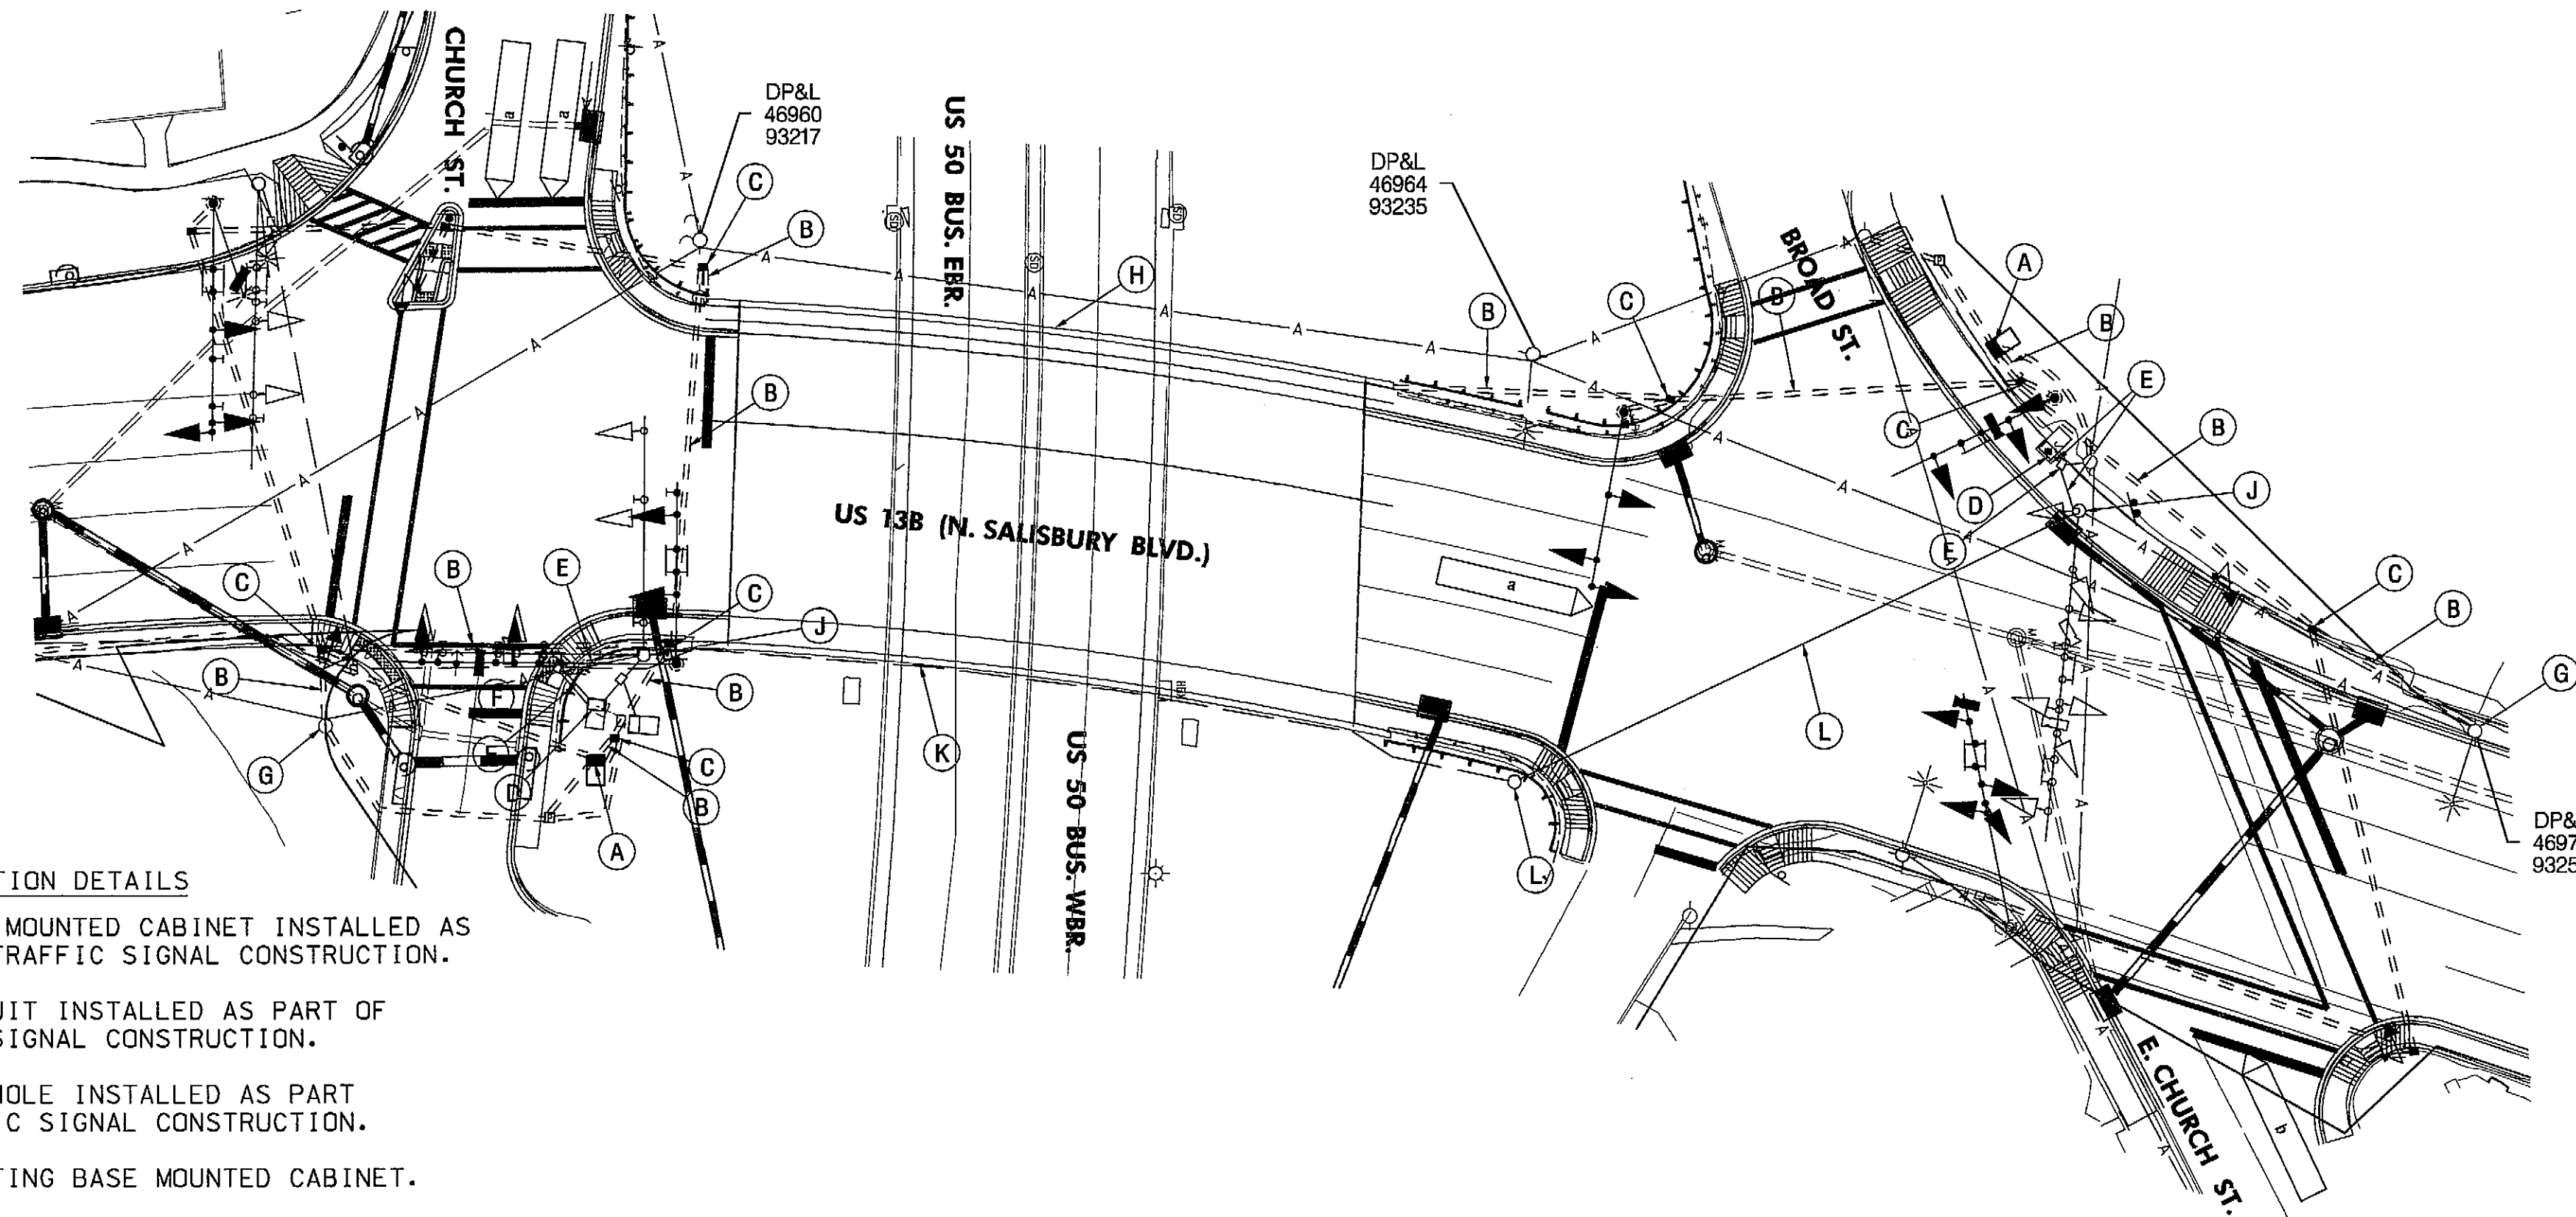

CONSTRUCTION DETAILS

- A. USE BASE MOUNTED CABINET INSTALLED AS PART OF TRAFFIC SIGNAL CONSTRUCTION.
- B. USE CONDUIT INSTALLED AS PART OF TRAFFIC SIGNAL CONSTRUCTION.
- C. USE HANDHOLE INSTALLED AS PART OF TRAFFIC SIGNAL CONSTRUCTION.
- D. USE EXISTING BASE MOUNTED CABINET.
- E. USE EXISTING CONDUIT.
- F. USE EXISTING HANDHOLE.
- G. USE EXISTING UTILITY POLE AND RISER.
- H. USE CONDUIT INSTALLED IN BRIDGE PARAPET.
- J. USE EXISTING SIGNAL POLE.
- K. ABANDON EXISTING CONDUIT.
- L. REMOVE AND DISPOSE OF TRAFFIC SIGNAL EQUIPMENT.

WIRING DIAGRAM

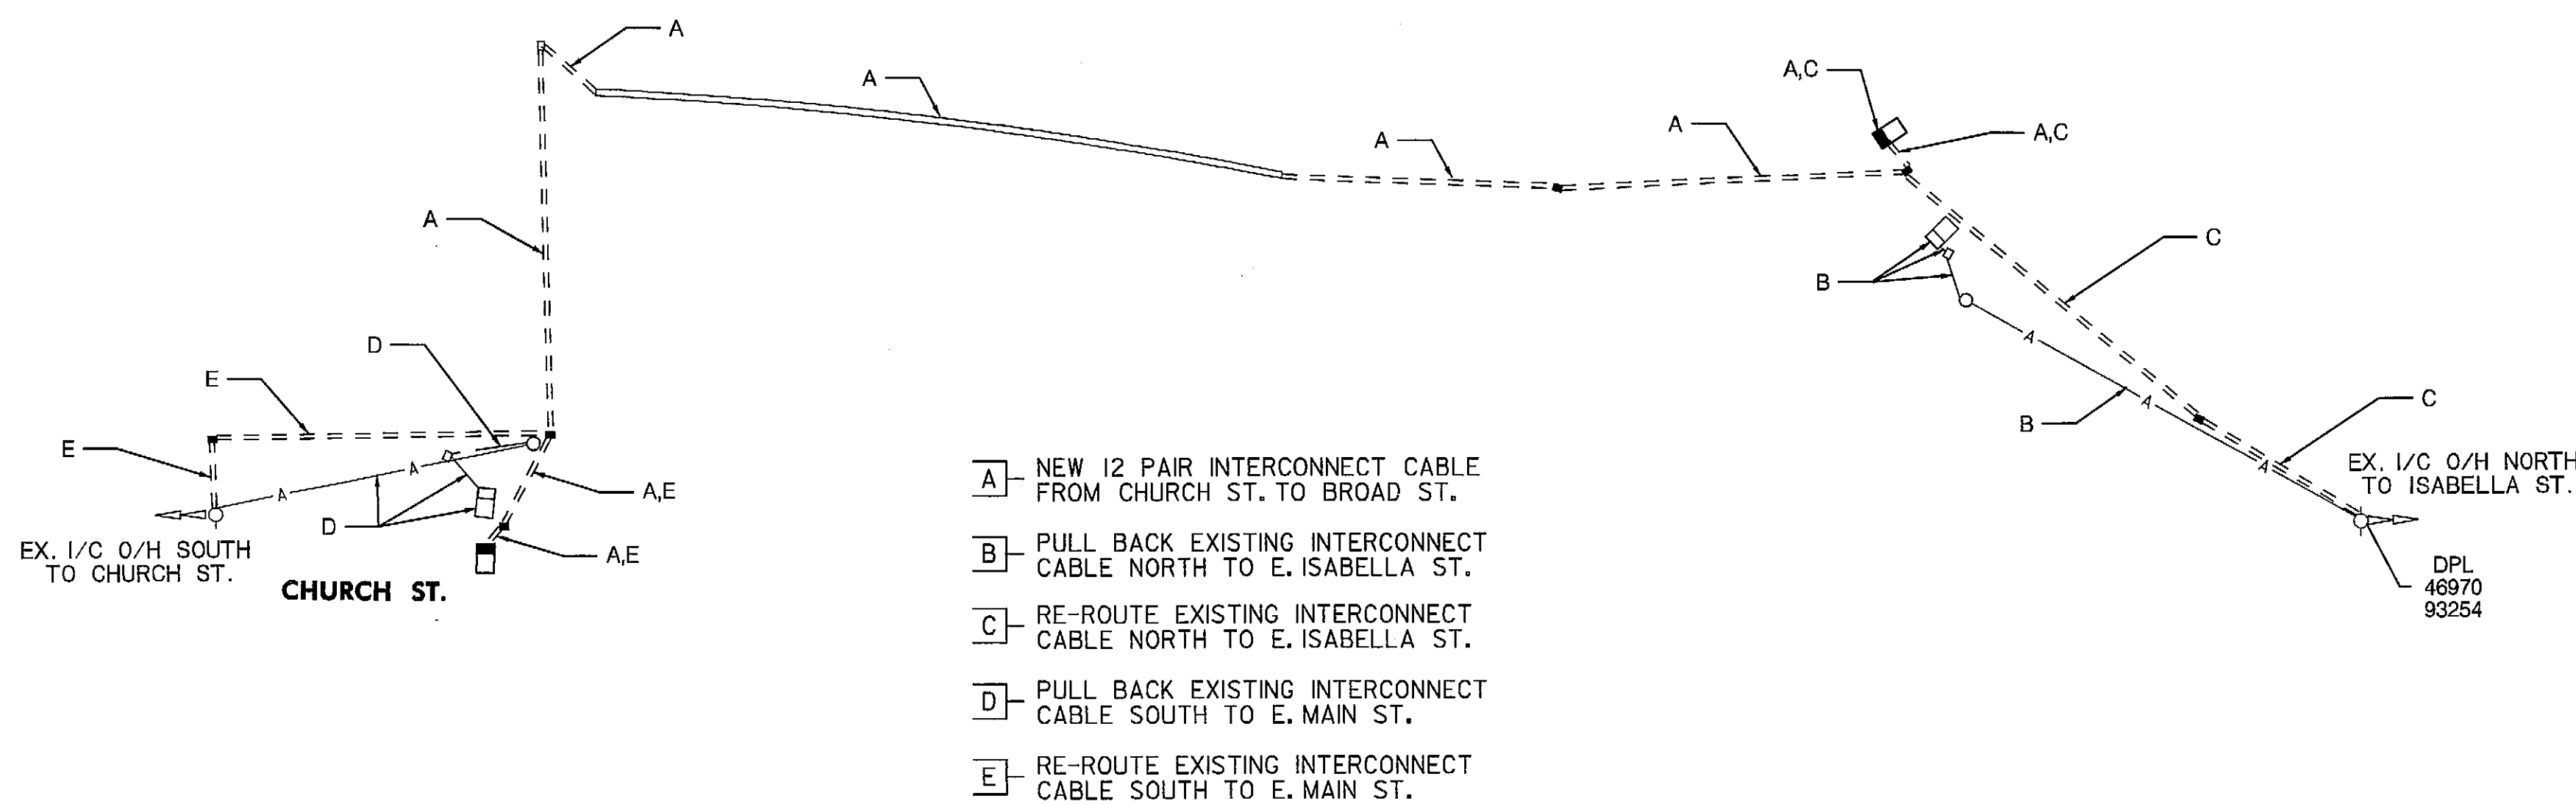

EQUIPMENT LIST 'A'

EQUIPMENT TO BE FURNISHED BY THE SHA.

CATEGORY CODE	QUANTITY	DESCRIPTION
NONE	NONE	NONE

EQUIPMENT LIST 'B'

EQUIPMENT TO BE FURNISHED AND INSTALLED BY THE CONTRACTOR.

CATEGORY CODE	QUANTITY	DESCRIPTION
I20500	1 LS	MAINTENANCE OF TRAFFIC
800000	500 LF	PULL-BACK AND RE-REROUTE EXISTING CABLE
800000	1 LS	REMOVE AND DISPOSE OF EQUIPMENT AND MATERIAL
822002	465 LF	12-PAIR COMMUNICATION CABLE, JELLY-FILLED (UNDERGROUND)

EQUIPMENT LIST 'C'

EQUIPMENT TO BE REMOVED AND RETURNED TO SHA.

CATEGORY CODE	QUANTITY	DESCRIPTION
NONE	ALL REMOVED EQUIPMENT SHALL BECOME THE PROPERTY OF THE CONTRACTOR.	

GENERAL NOTES

- ALL UTILITY POLES LABELED ARE MAINTAINED BY DP&L UNLESS OTHERWISE NOTED.
- THE CONTRACTOR SHALL FURNISH AND INSTALL NEW 12 PAIR JELLY-FILLED INTERCONNECT CABLE FROM THE PROPOSED BASE MOUNTED CABINET AT CHURCH STREET TO THE PROPOSED BASE MOUNTED CABINET AT BROAD STREET.
- DISCONNECTING AND SPLICING OF INTERCONNECT CABLES IN THE TRAFFIC SIGNAL CABINETS SHALL BE PERFORMED BY THE SHA SIGNAL SHOP. THE CONTRACTOR SHALL RUN INTERCONNECT CABLES INTO EACH CABINET AND PROPERLY LABEL THEM.

SHA
STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION
US 13 BUSINESS (N. SALISBURY BOULEVARD)
FROM CHURCH STREET TO BROAD STREET
ULTIMATE

INTERCONNECT PLAN

SCALE 1" = 30' ADVERTISED DATE 11/2008 CONTRACT NO. W16495180

DESIGNED BY MCG COUNTY WICOMICO
DRAWN BY MCG LOGMILE 22B01305.58 TO 22B01305.64
CHECKED BY BAB TMS NO. J116
F.A.P. NO. TOD NO.

TS NO. 1942 DRAWING IC-02 OF 02 SHEET NO. OF

APPROVALS	REVISIONS
TEAM LEADER 11/25/08	
ASST. DIR. CHIEF 11/25/08	
DIVISION CHIEF 12/1/08	
OFFICE DIRECTOR	

STV Incorporated
engineers/architects/planners/construction managers
7125 Ambassador Road Baltimore, MD 21244-2722 (410) 944-9112

UTILITY LEGEND			
—E—E—	ELECTRIC CABLES	—SD—SD—	STORM DRAIN
—A—A—	AERIAL CABLES	—G—G—	GAS MAIN
—T—T—	TELEPHONE CABLES	—W—W—	WATER MAIN
—F—F—	FIBER-OPTIC	—S—S—	SEWER MAIN