


- ① 2" SUPERPAVE ASPHALT MIX 9.5mm FOR SURFACE, PG64S-22, LEVEL 2
- ② 3" SUPERPAVE ASPHALT MIX 19.0mm FOR BASE, PG64S-22, LEVEL 2
- ③ 6" GRADED AGGREGATE BASE

PARK & RIDE – FLEXIBLE PAVEMENT SECTION – PASSENGER VEHICLES

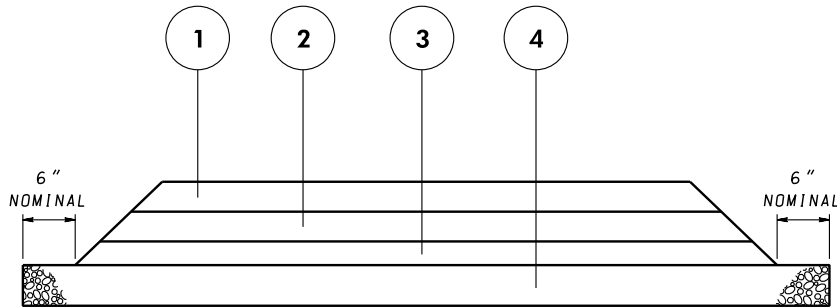

- ① 2" SUPERPAVE ASPHALT MIX 9.5mm FOR SURFACE, PG64S-22, LEVEL 2
- ② 3" SUPERPAVE ASPHALT MIX 19.0mm FOR BASE, PG64S-22, LEVEL 2
- ③ 2" SUPERPAVE ASPHALT MIX 19.0mm FOR BASE, PG64S-22, LEVEL 2
- ④ 4" GRADED AGGREGATE BASE

PARK & RIDE – FLEXIBLE PAVEMENT SECTION – BUS LANE

SPECIFICATION	CATEGORY CODE ITEMS
APPROVED	<i>Raff</i> DIRECTOR – OFFICE OF HIGHWAY DEVELOPMENT
SHA State Highway Administration	APPROVAL • SHA REVISIONS
	APPROVAL 2-25-16
	REVISED
	REVISED

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
PARK & RIDE PAVEMENT SECTIONS
FLEXIBLE PAVEMENT

STANDARD NO. MD 580.06