

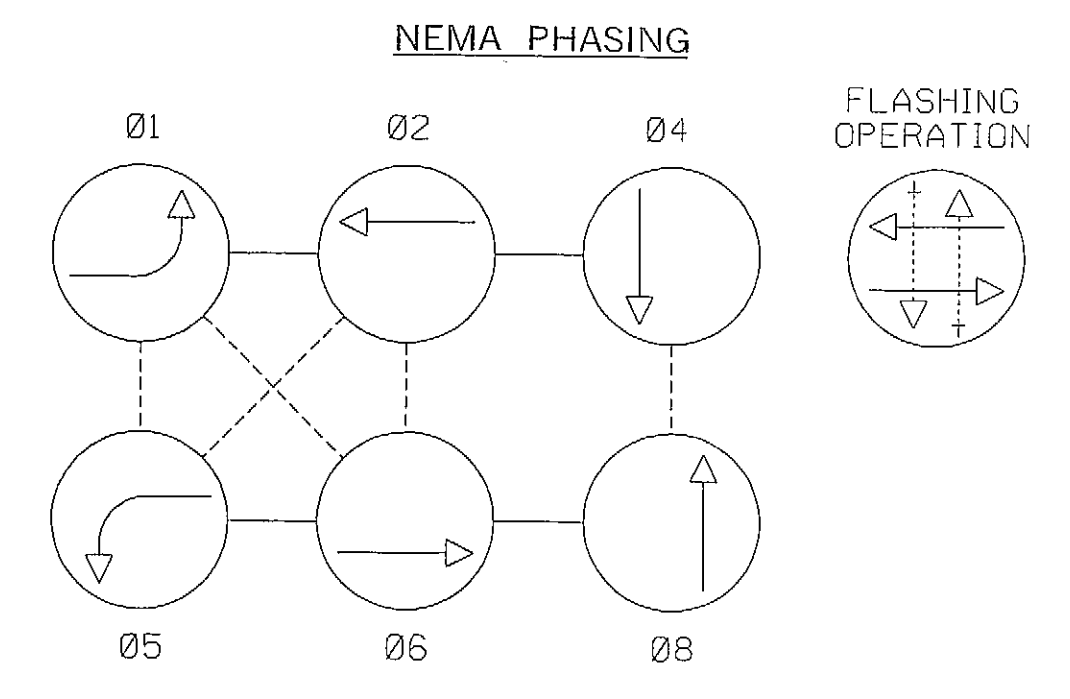
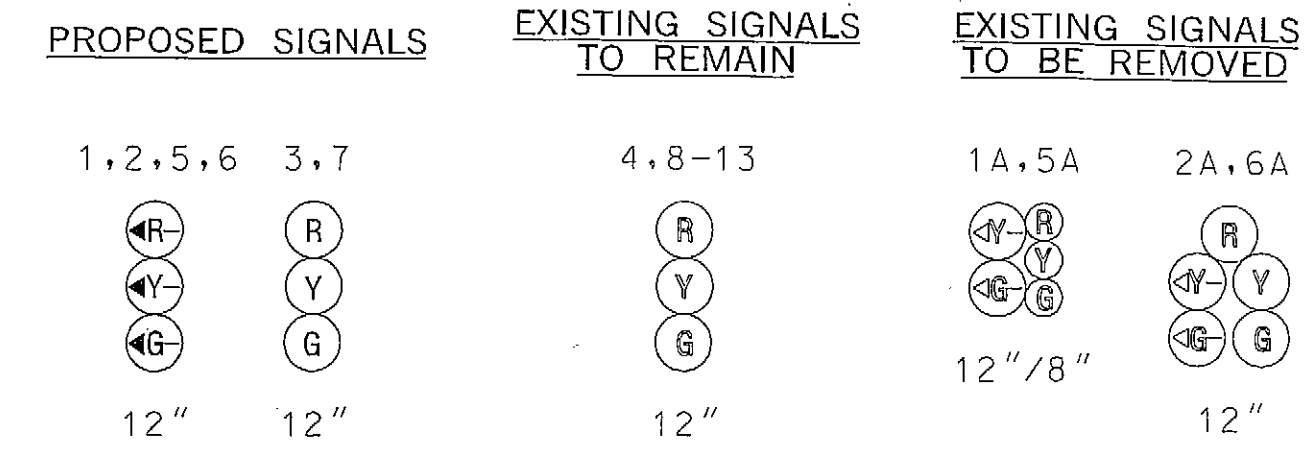


MD 140 IS ASSUMED TO RUN
IN AN EAST-WEST DIRECTION

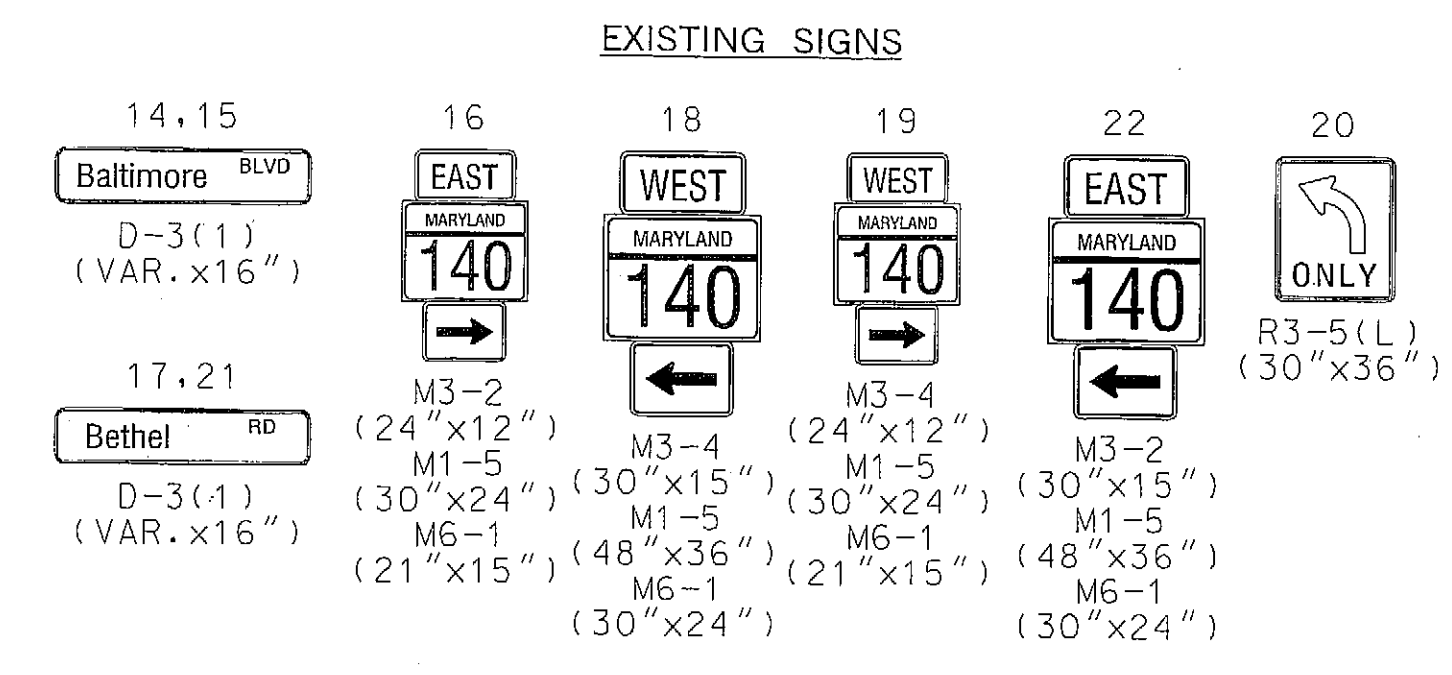

EXISTING VIDEO
DETECTION CAMERA
a,b,c,d

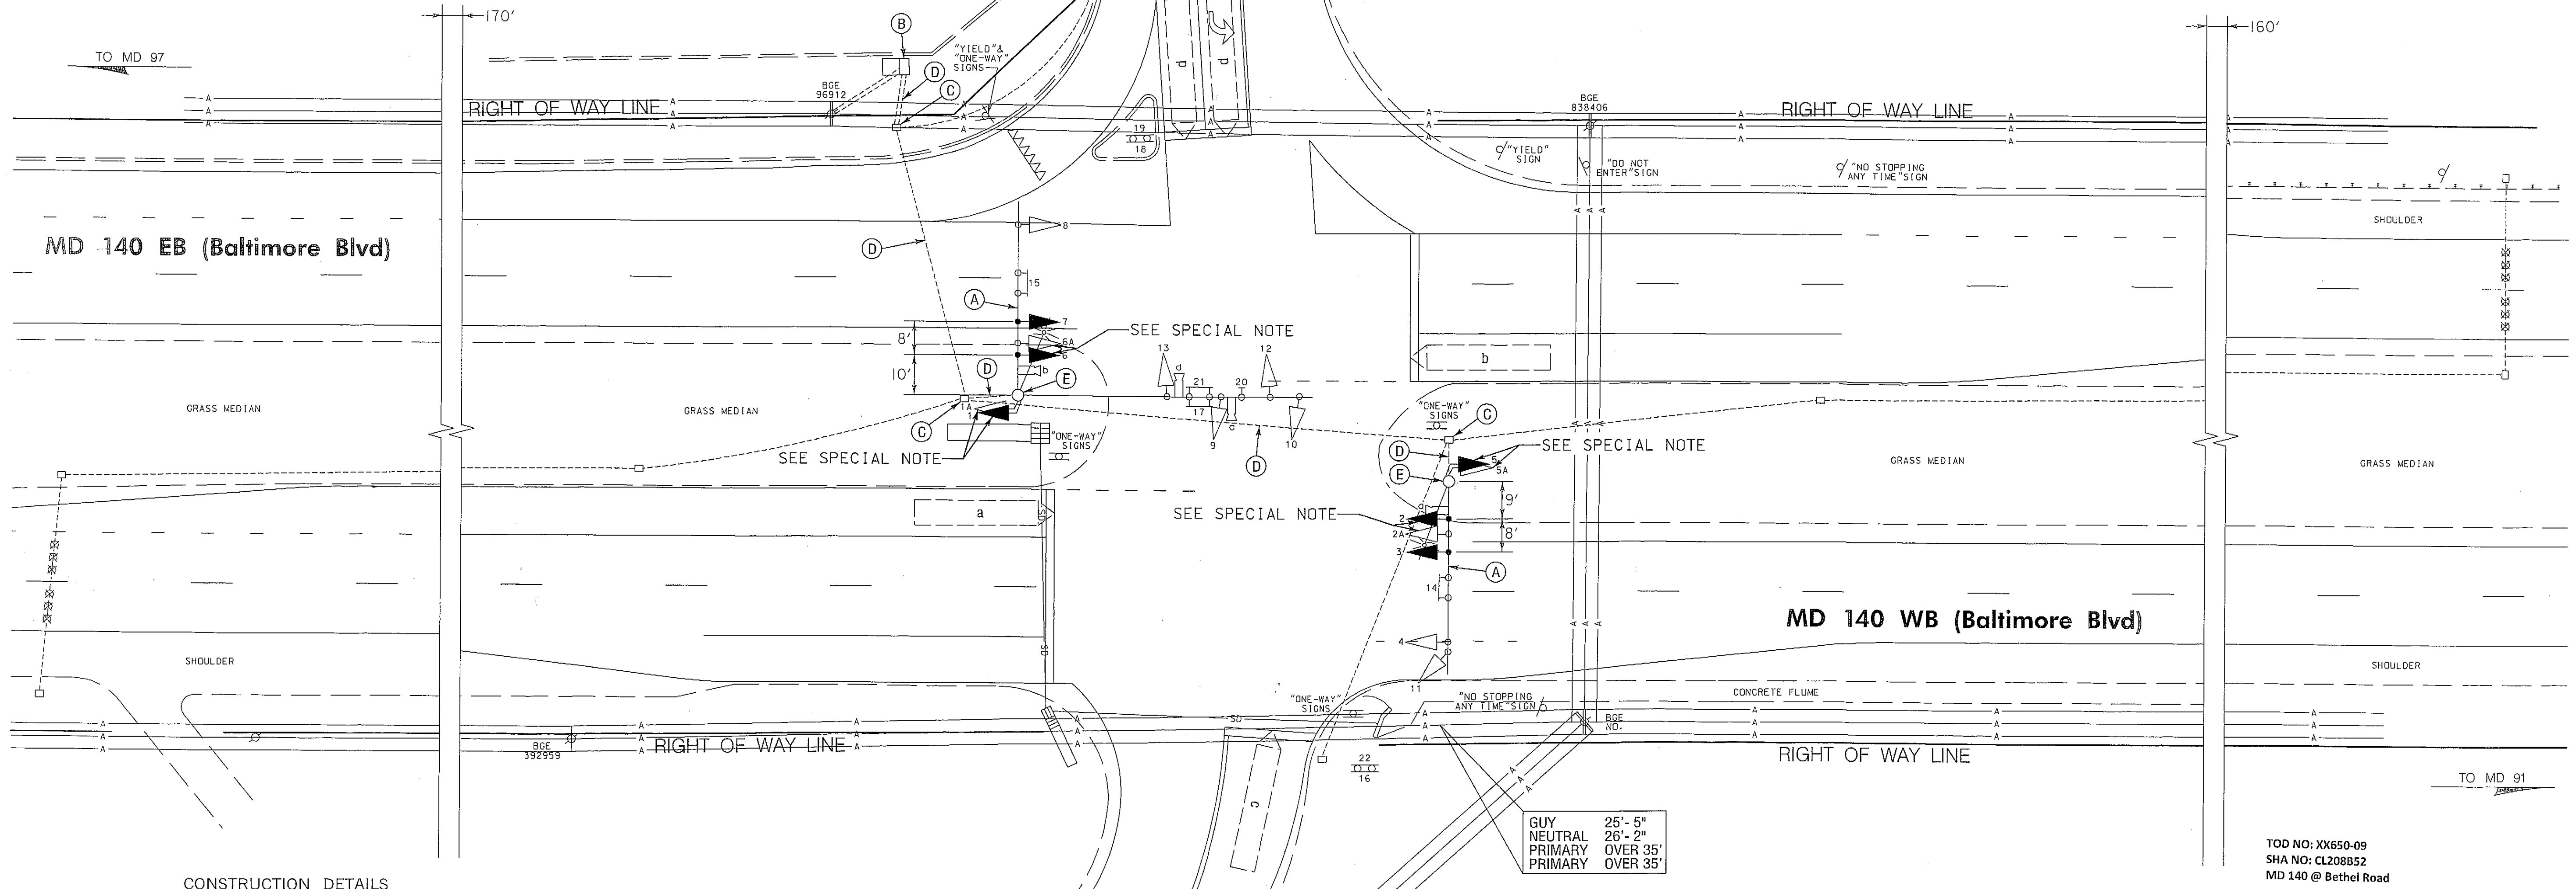

- CONSTRUCTION DETAILS
- A. USE EXISTING MAST ARM POLE AND REMOVE EXISTING SIGNAL HEAD AND INSTALL NEW SIGNAL HEADS AS SHOWN.
 - B. USE EXISTING BASE MOUNTED CONTROLLER AND CABINET.
 - C. USE EXISTING HANDHOLE.
 - D. USE EXISTING CONDUIT.
 - E. USE EXISTING STEEL POLE. REMOVE EXISTING SIGNAL HEAD AND INSTALL NEW SIGNAL HEAD AS SHOWN.

- GENERAL NOTES
1. ALL EXISTING TRAFFIC SIGNAL EQUIPMENT REMOVED SHALL BECOME THE PROPERTY OF THE SIGNAL CONTRACTOR UPON COMPLETION OF THE NEW SIGNAL.
 2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR TERMINATING ALL SIGNAL CABLES TO THE APPROPRIATE TERMINALS AND PROPERLY LABEL EACH CABLE.
 3. REMOVE AND DISPOSE OF ALL UNUSED SIGNAL CABLE.

SPECIAL NOTE:
DISCONNECT EXISTING ELECTRICAL CABLE FROM EXISTING SIGNAL HEADS TO BE REMOVED AND RE-CONNECT TO PROPOSED SIGNAL HEADS. ANY SIGNAL OUTAGE SHALL BE SCHEDULED DURING NON-PEAK HOURS AS DIRECTED BY THE ENGINEER.



GEOMETRIC LEGEND	APPROVALS	REVISIONS	TRAFFIC SIGNALIZATION PLAN	
EXISTING PROPOSED	TEAM LEADER ASST. DIR. CHIEF DIVISION CHIEF OFFICE DIRECTOR	UPGRADED EX. E/P PHASING TO EXCLUSIVE LEFT TURNS ON EB & WB MD 140. TMS# 1096 CONTRACT SHA NO. XX650-09 11/7/2011 [A] UPGRADE TCB TO FULL TRAFFIC SIGNAL 3/2/2006	SCALE 1" = 20' ADVERTISED DATE 12/22/2003 CONTRACT NO. BW396M82	
UTILITY LEGEND SD - STORM DRAIN G - GAS MAIN W - WATER MAIN S - SEWER MAIN E - ELECTRIC CABLES A - AERIAL CABLES T - TELEPHONE CABLES F - FIBER-OPTIC			DESIGNED BY T. Zaydel COUNTY Carroll	
			DRAWN BY M. Howell LOGMILE 06014005.04	
			CHECKED BY T. Zaydel TMS NO. H333	
			F.A.P. NO. SEE TITLE SHEET TOD NO.	
			TS NO. 4243 B DRAWING TSP-1 OF 2 SHEET NO. 1 OF 2	

PLOTTED: November 14, 2011
FILE: N:\31669-181\CADD\PSG-P001_1086.dgn