


NOTE: WATKINS MILL ROAD IS CONSIDERED TO RUN IN AN EAST-WEST DIRECTION.

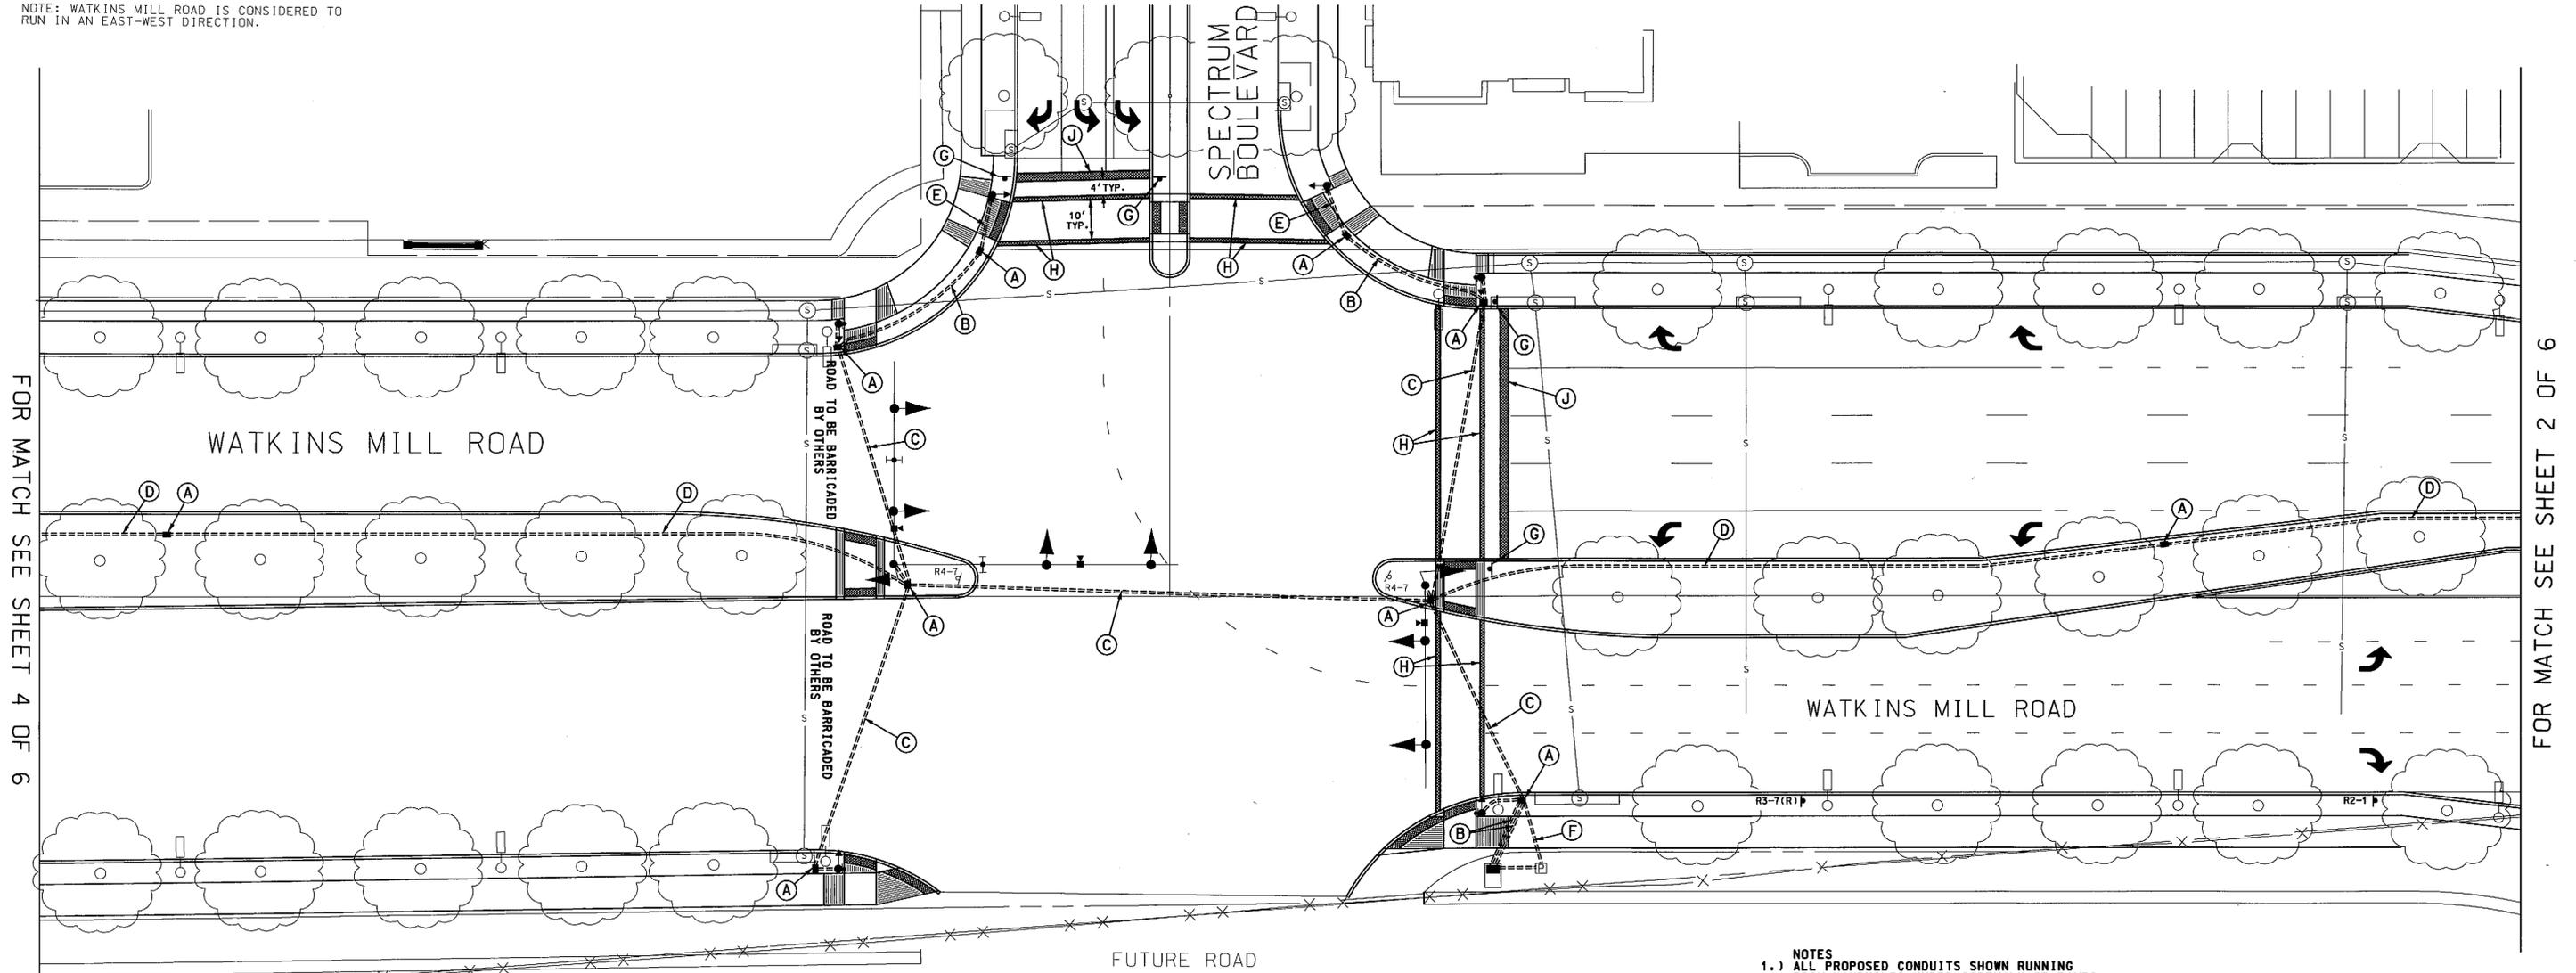

**CONSTRUCTION DETAILS**

- A. Install handhole.
- B. Install 4" polyvinyl chloride electrical conduit (Schedule 80) (trenched).
- C. Install 2- 4" polyvinyl chloride electrical conduit (Schedule 80) (in the same trench).
- D. Install 1- 4" and 1- 3" polyvinyl chloride electrical conduit (Schedule 80) (in the same trench).
- E. Install 3" polyvinyl chloride electrical conduit (Schedule 80) (trenched).
- F. Install 2" polyvinyl chloride electrical conduit (Schedule 80) (trenched).
- G. Install (Stop Sign) 36"x 36" on tubular steel post.
- H. Install 12" white heat applied preformed thermoplastic pavement marking. (Crosswalk)
- J. Install 24" white heat applied preformed thermoplastic pavement marking. (Stopline)


- NOTES**
- 1.) ALL PROPOSED CONDUITS SHOWN RUNNING FROM HANDHOLES UNDER SIDEWALK OR RAMPS THAT STOP, SHALL EXTEND 4' PAST SIDEWALK AND BE CAPPED.
  - 2.) ALL CROSSWALKS SHALL BE CENTERED ON THE PROPOSED HANDICAPPED RAMPS AS SHOWN.
  - 3.) ALL SHADED SIGNAL EQUIPMENT (NOT DETAILED) WILL BE INSTALLED BY OTHERS UNDER A FUTURE CONTRACT.

**GEOMETRIC LEGEND**

PROPOSED \_\_\_\_\_  
EXISTING \_\_\_\_\_

**LEGEND OF UNDERGROUND AND OVERHEAD UTILITIES**

AERIAL CABLE	—A—A—
ELECTRIC	—E—E—
TELEPHONE	—T—T—
GAS	—G—G—
SEWER	—S—S—
WATER	—W—W—
CABLE TV	—TV—TV—



NO.	REVISION	BY	APP'D	DATE

DESIGNED BY: RR ZACHERL	DATE 10/26/09
DRAWN BY: DA NIES	DATE 10/26/09
CHECKED BY:	DATE
DRAWING NO.:	
Approved: _____ Division of Traffic Engineering and Operations	
Reviewed: _____ Manager, Transportation Systems Engineering	
Reviewed: _____ Manager, Traffic Engineering Studies Section	
Recommended: _____ Engineer, Transportation Systems Engineering	

DEPARTMENT OF TRANSPORTATION  
DIVISION OF TRAFFIC ENGINEERING AND OPERATIONS  
MONTGOMERY COUNTY, MARYLAND

**CONDUIT PLAN**

WATKINS MILL ROAD AND  
SPECTRUM BOULEVARD

SCALE: 1" = 20'

SHA NO. BW996M82  
TIMS NO. J905

10/26/2009 1:14:25 PM