


EQUIPMENT LIST "A, B & C"

A. EQUIPMENT TO BE SUPPLIED BY SHA.			
NONE			
B. EQUIPMENT TO BE FURNISHED AND/OR INSTALLED BY THE CONT			
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
822002	12-PAIR COMMUNICATION CABLE, JELLYFILLED (UNDERGROUND)	LF	1800
C. ALL MATERIALS TO BE REMOVED BY THE CONTRACTOR SHALL BECOME PROPERTY OF THE CONTRACTOR.			
NONE			

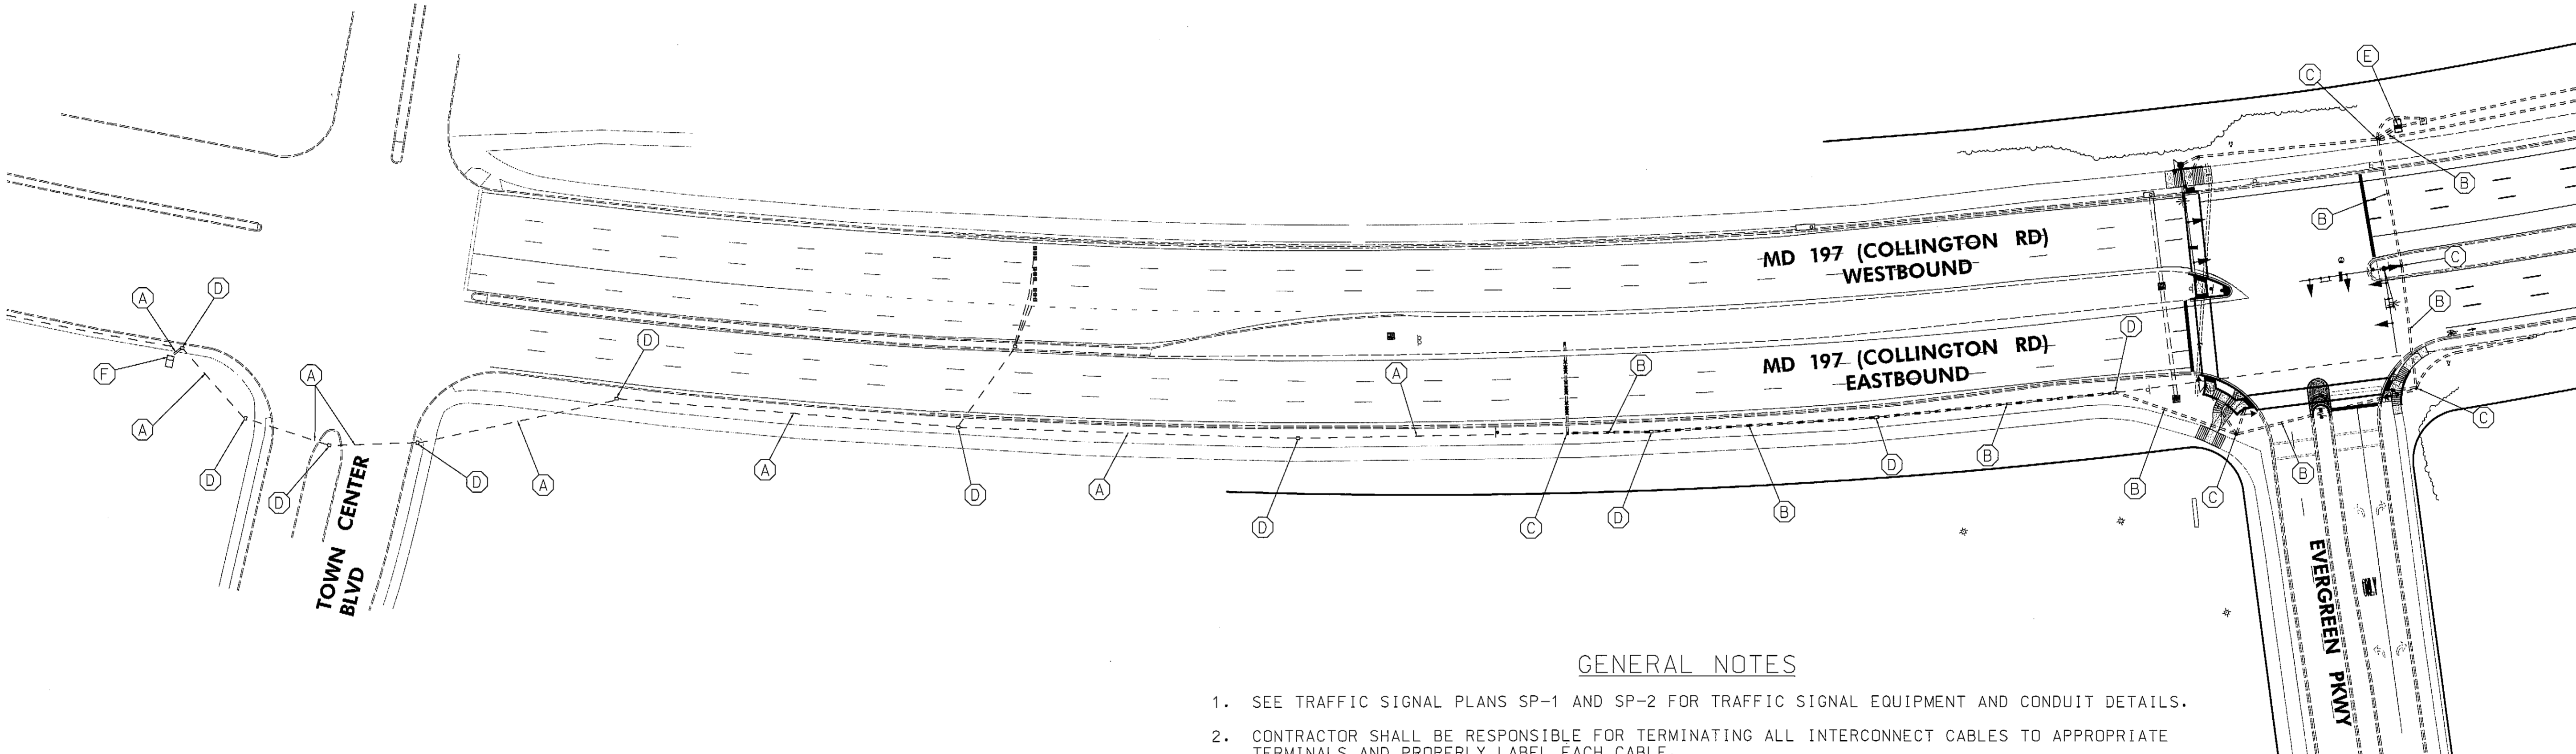

GENERAL NOTES

1. SEE TRAFFIC SIGNAL PLANS SP-1 AND SP-2 FOR TRAFFIC SIGNAL EQUIPMENT AND CONDUIT DETAILS.
2. CONTRACTOR SHALL BE RESPONSIBLE FOR TERMINATING ALL INTERCONNECT CABLES TO APPROPRIATE TERMINALS AND PROPERLY LABEL EACH CABLE.
3. UNDERGROUND UTILITIES SHOWN ON THESE PLANS ARE SCHEMATIC ONLY AND MAY NOT BE COMPLETE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR NOTIFYING "MISS UTILITY" PRIOR TO CONSTRUCTION SO THAT ALL UTILITIES MAY BE LOCATED IN THE FIELD. IF THE CONTRACTOR PERCEIVES THAT A CONFLICT BETWEEN THE UTILITIES AND THE TRAFFIC SIGNAL WILL OCCUR, THE CONTRACTOR SHALL NOTIFY THE PROJECT ENGINEER IMMEDIATELY SO THAT THE CONFLICT MAY BE RESOLVED.
4. ALL UNUSED CABLE SHALL BE REMOVED AND DISPOSED OF BY THE CONTRACTOR.

CONSTRUCTION DETAILS

- A. INSTALL 12-PAIR COMMUNICATION CABLE FOR INTERCONNECT IN EXISTING CONDUIT.
- B. INSTALL 12-PAIR COMMUNICATION CABLE FOR INTERCONNECT IN PROPOSED CONDUIT. (PROPOSED CONDUIT INSTALLED UNDER TRAFFIC SIGNAL WORK FOR MD 197 AT EVERGREEN PARKWAY. REFER TO SP-1)
- C. USE PROPOSED ELECTRICAL HANDHOLE. (PROPOSED ELECTRICAL HANDHOLE INSTALLED UNDER TRAFFIC SIGNAL WORK AT MD 197 AT EVERGREEN PARKWAY. REFER TO SP-1)
- D. USE EXISTING ELECTRICAL HANDHOLE.
- E. USE PROPOSED CABINET. (PROPOSED BASE MOUNTED CABINET INSTALLED UNDER TRAFFIC SIGNAL WORK AT MD 197 AT EVERGREEN PARKWAY. REFER TO SP-1)
- F. USE EXISTING CABINET.

GEOMETRIC LEGEND	
---	EXISTING
---	PROPOSED
UTILITY LEGEND	
SD	STORM DRAIN
G	GAS MAIN
W	WATER MAIN
S	SEWER MAIN
E	ELECTRIC CABLES
A	AERIAL CABLES
T	TELEPHONE CABLES
F	FIBER-OPTIC

SHA

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION

MD 197 (COLLINGTON RD) BETWEEN
TOWN CTR BLVD AND EVERGREEN PKWY
BOWIE, MARYLAND

REVISIONS		INTERCONNECT PLAN	
SCALE 1"=50'		DATE NOVEMBER 2012	CONTRACT NO. PG7865277
DESIGNED BY WFW	COUNTY PRINCE GEORGE'S	DRAWN BY WFW	LOGMILE 16019700.72 TO 16019700.94
CHECKED BY BJJ	TMS NO. L229	FAP NO.	TOD NO.
TS NO. 4860-IC	DRAWING IC-1	OF 1	SHEET NO. OF

RK&K

Rummel, Klepper & Kahl, LLP

81 MOSHER STREET | BALTIMORE, MD 21217

PH: (410) 728-2900 FAX: (410) 728-9160

Engineers Construction Managers Planners Scientists

www.rkk.com