

STANDARD TYPE A COMBINATION CURB AND GUTTER 12 INCH GUTTER PAN 8 INCH DEPTH (SHA STD. NO. MD-620.02)


LOCATION	QUANTITY (LF)
NORTHWEST QUADRANT	51
SOUTHWEST QUADRANT	81

DETECTABLE WARNING SURFACE (SHA STD. NO. MD-655.40)

LOCATION	QUANTITY (SF)
NORTHWEST QUADRANT	23
SOUTHWEST QUADRANT	20

5 INCH CONCRETE SIDEWALK


LOCATION	QUANTITY (SF)
NORTHWEST QUADRANT	235
SOUTHWEST QUADRANT	241

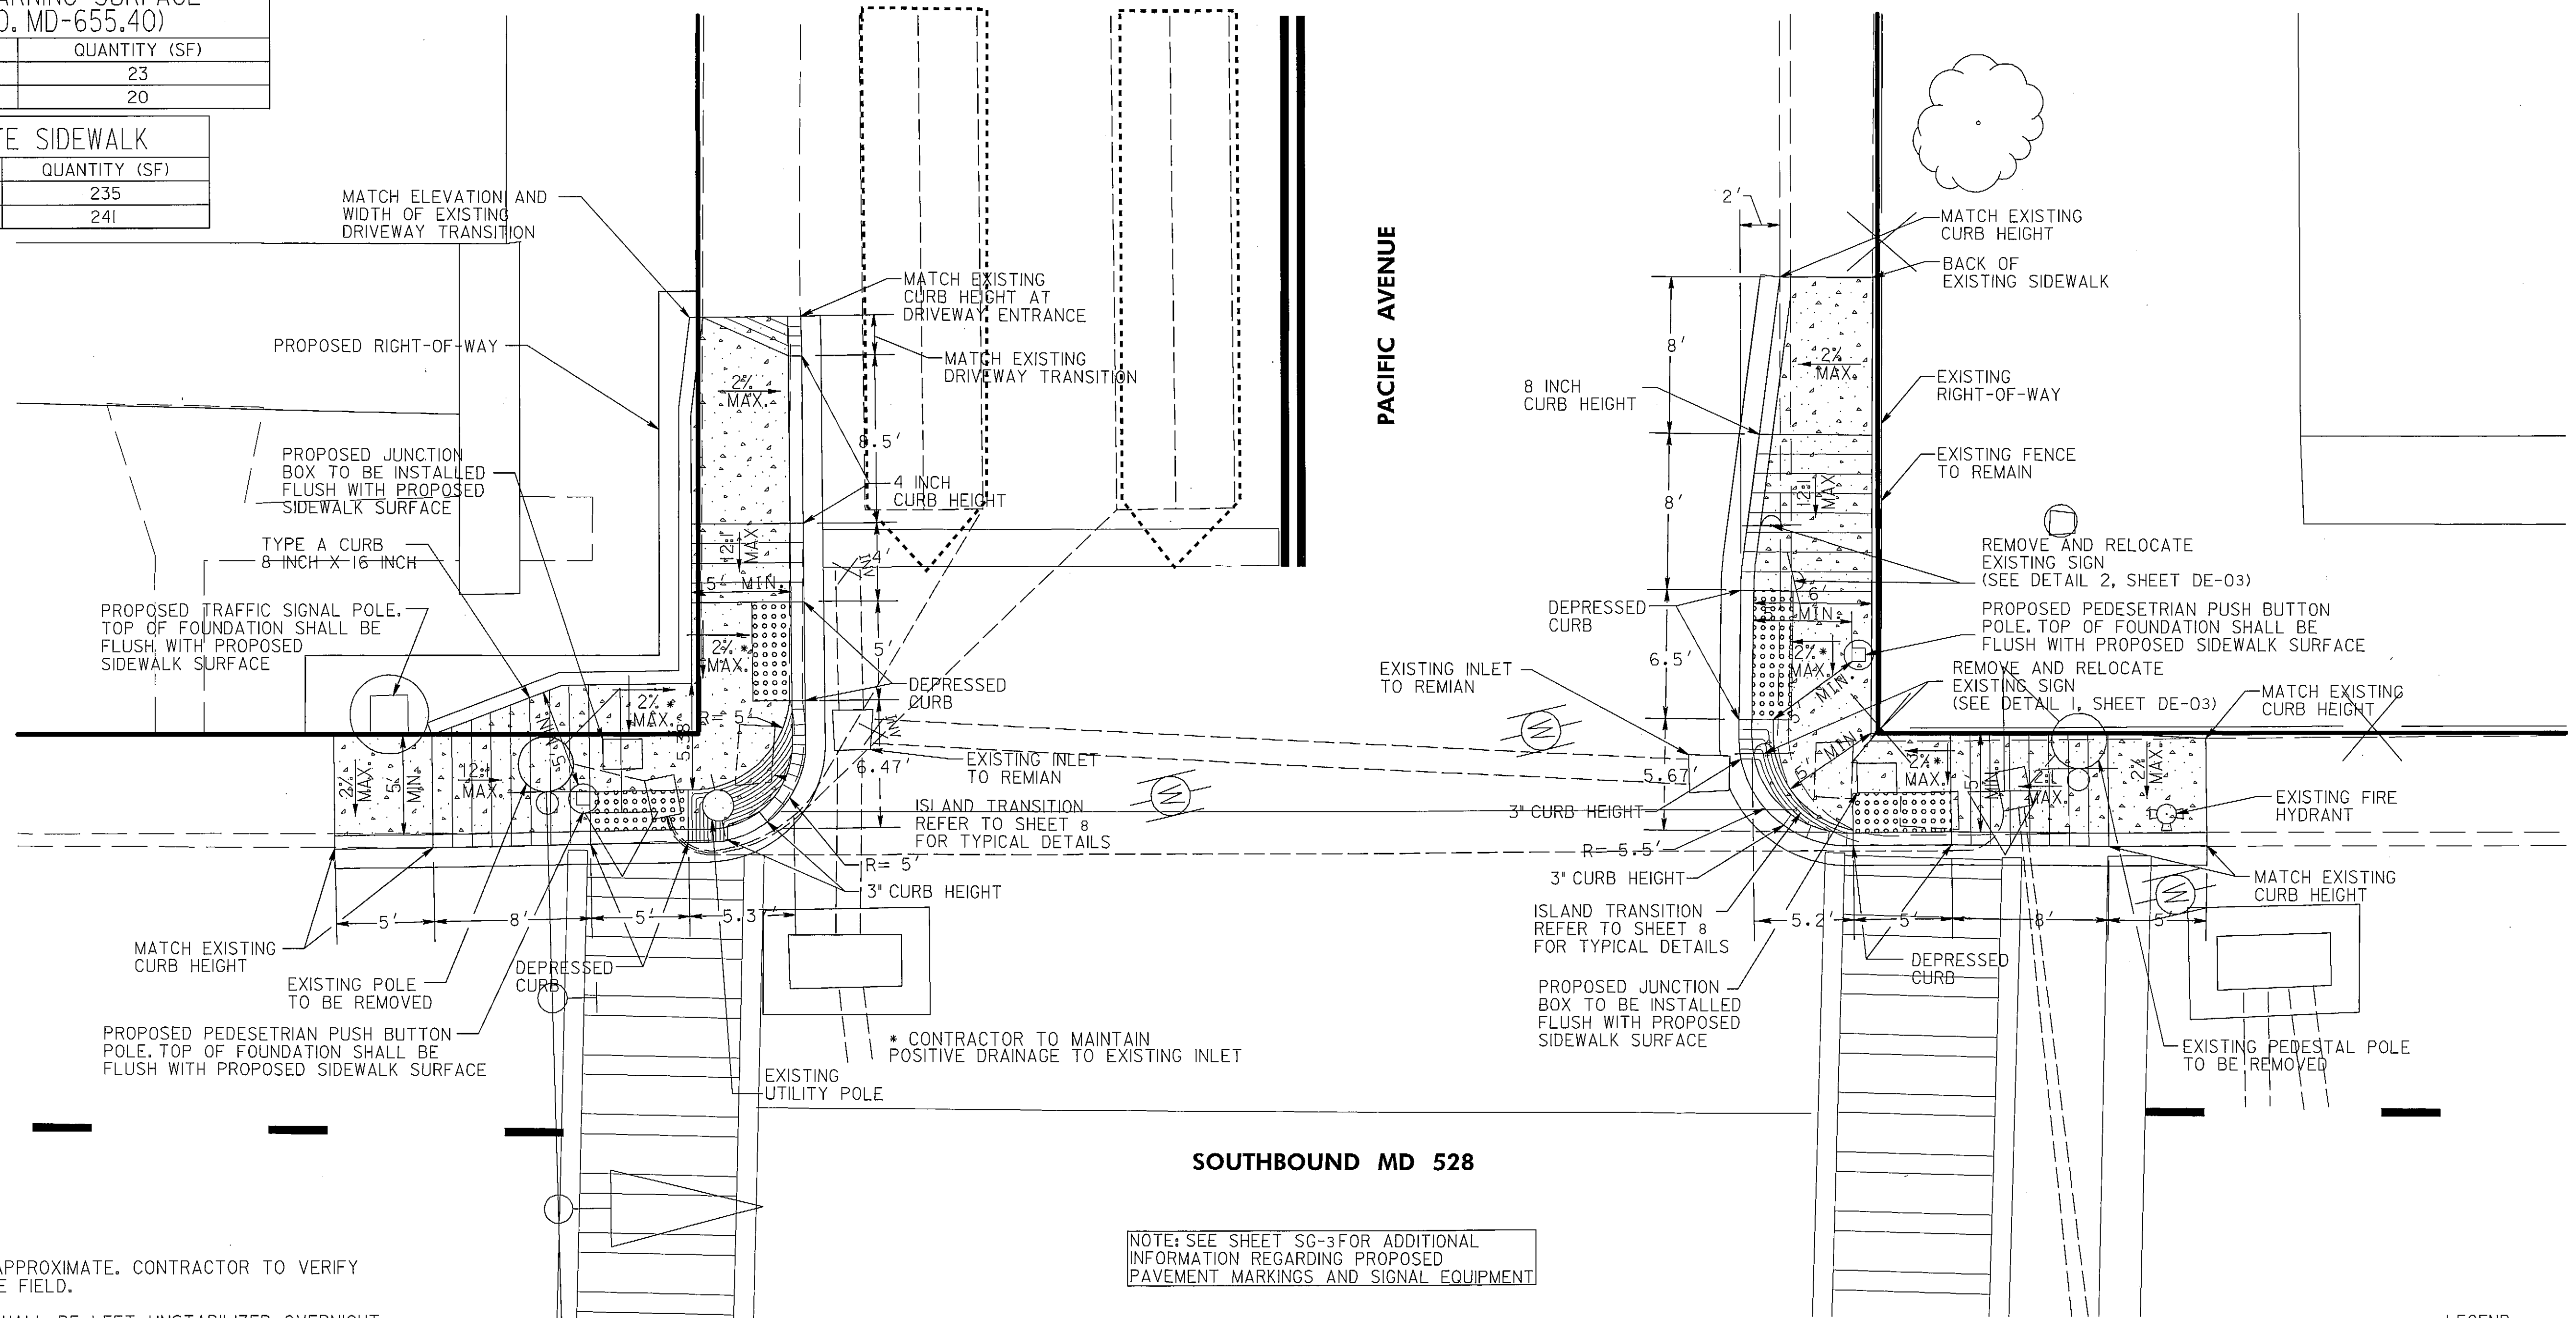

GENERAL NOTES

- ALL DIMENSIONS ARE APPROXIMATE. CONTRACTOR TO VERIFY ALL DIMENSIONS IN THE FIELD.
- NO DISTURBED AREA SHALL BE LEFT UNSTABILIZED OVERNIGHT UNLESS THE RUNOFF IS DIRECTED TO AN APPROVED SEDIMENT CONTROL DEVICE.
- SIDEWALK RECONSTRUCTION LIMITS SHALL COINCIDE WITH CRACK CONTROL JOINTS (JOINTER GROOVES) OR EXPANSION JOINTS IN EXISTING SIDEWALK. NEW EXPANSION JOINTS SHALL BE PROVIDED AT THE INTERFACE OF EXISTING AND PROPOSED SIDEWALK. SEE SHA. STD. NO. MD-655.01.
- INSTALL DETECTABLE WARNING SURFACE ON SIDEWALK RAMP AS PER SHA STD. NO. MD-655.40.
- FORM NEW SIDEWALK AND EXPANSION JOINT MATERIAL AROUND EX. UTILITY POLES, MANHOLE COVERS, VALVE COVERS, AND FIRE HYDRANTS AS NECESSARY.
- RESET ANY SIGNS DISTURBED BY THE CONSTRUCTION AS DIRECTED BY THE ENGINEER.
- EXISTING INLETS SHALL NOT BE DAMAGED DURING CONSTRUCTION. DAMAGE TO THE INLETS WILL REQUIRE THE INLET TO BE REPLACED AT NO ADDITIONAL COST TO THE ADMINISTRATION.
- EXISTING TREES, SHRUBS, AND THEIR RESPECTIVE ROOT SYSTEMS SHALL NOT BE DISTURBED DURING CONSTRUCTION.
- CONTRACTOR TO REPLACE SIDEWALK AND CURB IN-KIND FOR ANY SIDEWALK IMPACTED BY PROPOSED CONDUIT BORE.

NOTE: SEE SHEET SG-3 FOR ADDITIONAL INFORMATION REGARDING PROPOSED PAVEMENT MARKINGS AND SIGNAL EQUIPMENT

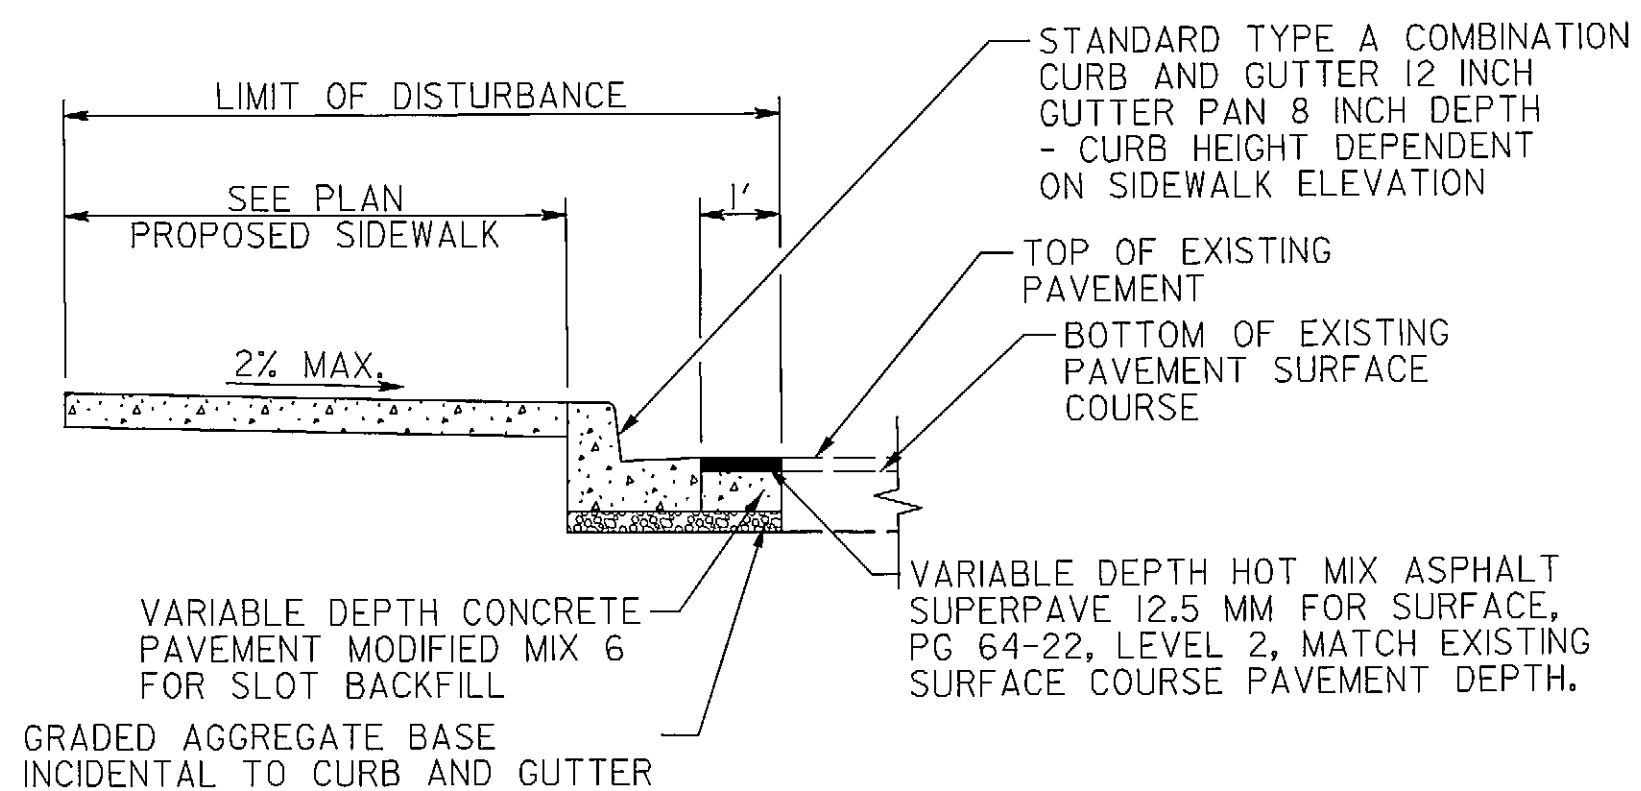

TYPICAL SECTION
PROPOSED SIDEWALK
WITH CURB REPLACEMENT
NOT TO SCALE

LEGEND

- CONCRETE
- DETECTABLE WARNING SURFACE

TOD NO: XX224-11
SHA NO: W0311A54/C54
MD 528 @ 30th Street/MD 528 @ Pacific Avenue



STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION

MD 528 (COASTAL HIGHWAY) AT PACIFIC AVE.
OCEAN CITY, MD.

REVISIONS

RAMP DETAILS

SCALE 1"=5' DATE JUNE 2011 CONTRACT NO. XX2245185

DESIGNED BY WRW COUNTY
DRAWN BY WRW LOGMILE
CHECKED BY JDG TMS NO.
FAP NO. TOD NO.

TS NO. 2261 DRAWING DE-2 OF 3 SHEET NO. 6 OF 8



Rummel, Klepper & Kahl, LLP
81 MOSHER STREET | BALTIMORE, MD 21217
PH: (410) 728-2800 FAX: (410) 728-3190
www.rkk.com

PLOTTED: Thursday, May 26, 2011 AT 10:59 AM
FILE: K:\projects\2007\07096_shadrd\Task 06_MD528 @ Pacific\CADD\plan\pDE-0001_Pacific.dgn