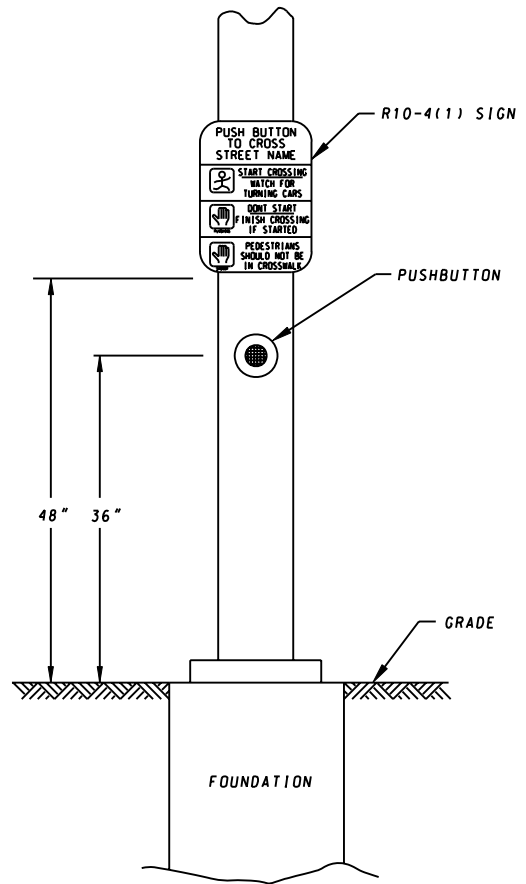




**PEDESTAL POLE**



**METAL POLE**

**NOTES:**

1. EACH PEDESTRIAN PUSHBUTTON AND PUSHBUTTON SIGN SHALL BE SECURED BY TWO (2) 1/4" - 20 UNC STAINLESS STEEL HEX HEAD BOLTS AND FLAT WASHER DRILLED AND TAPPED INTO THE METAL POLE.
2. THE PEDESTRIAN PUSHBUTTON SHALL HAVE A 1/2" HOLE DRILLED INTO THE METAL POLE FOR WIRING.
3. THE AFFECTED AREA SHALL BE CLEANED WITH METAL WIRE BRUSH AND PAINTED WITH INORGANIC ZINC.

SPECIFICATION <b>817</b>	CATEGORY CODE ITEMS
APPROVED	
DIRECTOR - OFFICE OF TRAFFIC AND SAFETY	
	APPROVAL • SHA REVISIONS
	APPROVAL 7-1-94
	REVISED 10-1-01
	REVISED
	REVISED
APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	APPROVAL 7-1-94
REVISED	REVISED 2-1-01
REVISED	REVISED
REVISED	REVISED

**Maryland Department of Transportation**  
**STATE HIGHWAY ADMINISTRATION**  
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

**PEDESTRIAN PUSHBUTTON INSTALLATION**

**STANDARD NO. MD 817.01**