
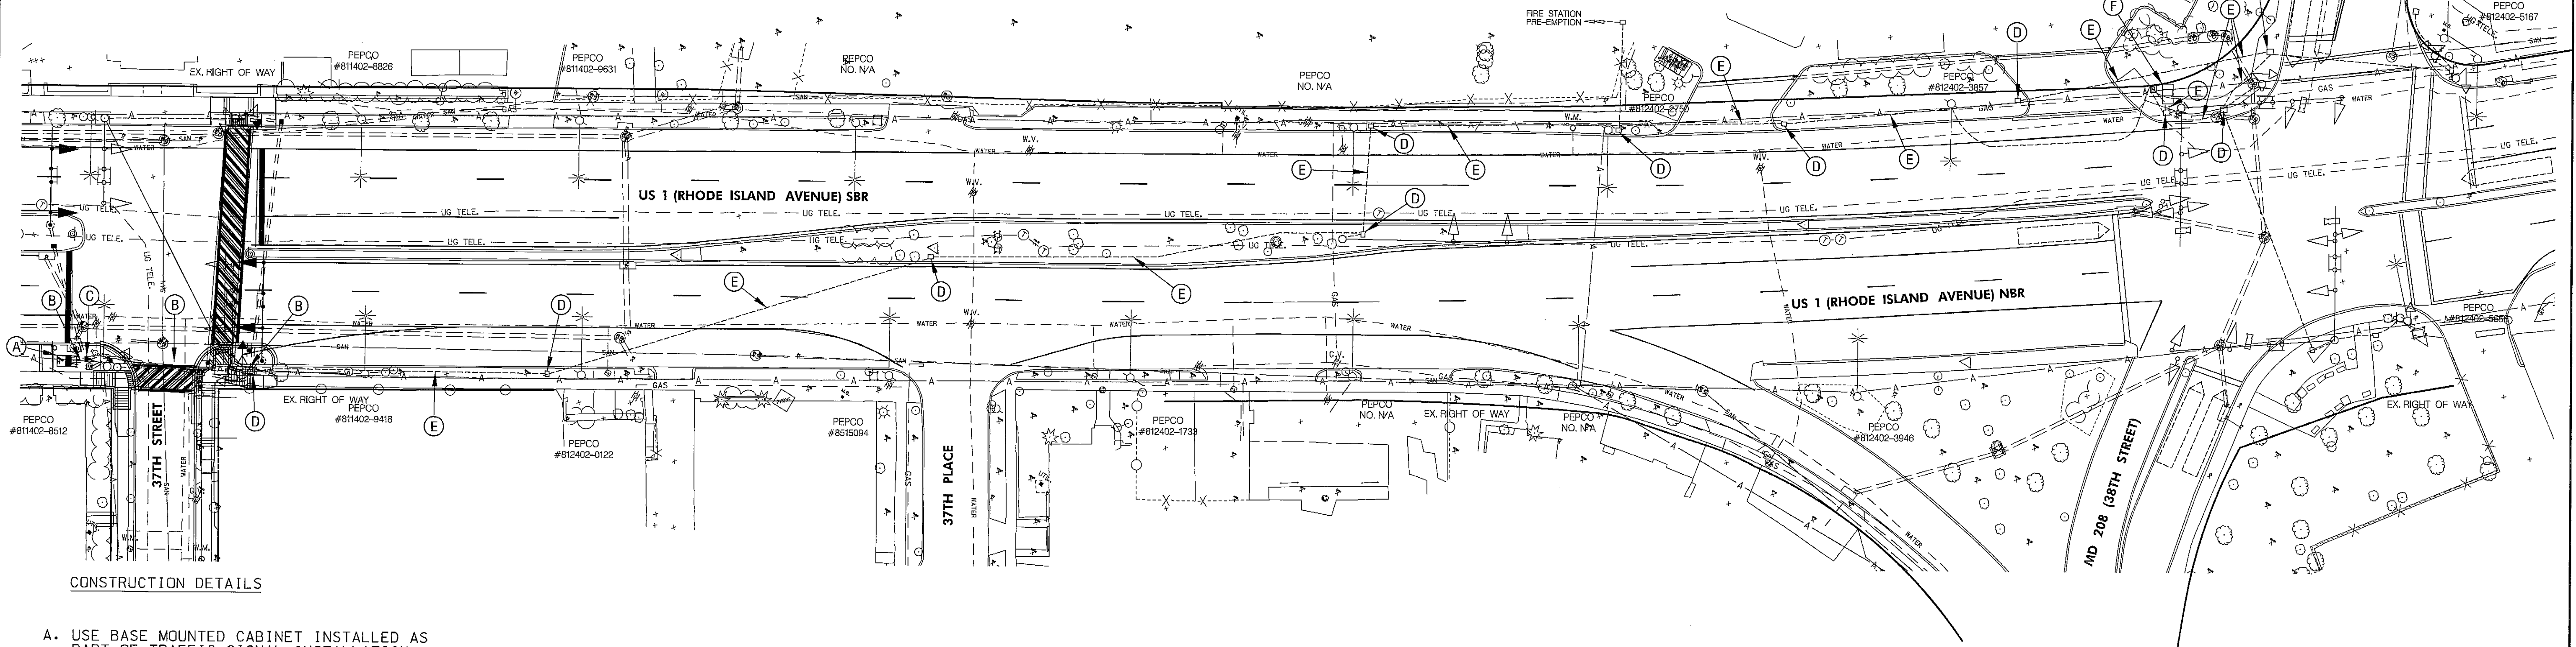


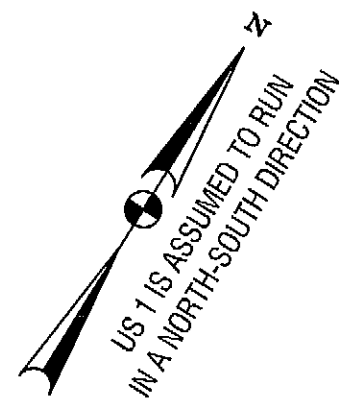

CONSTRUCTION DETAILS

- A. USE BASE MOUNTED CABINET INSTALLED AS PART OF TRAFFIC SIGNAL INSTALLATION.
- B. USE CONDUIT INSTALLED AS PART OF TRAFFIC SIGNAL INSTALLATION.
- C. USE HANDHOLE INSTALLED AS PART OF TRAFFIC SIGNAL INSTALLATION.
- D. USE EXISTING HANDHOLE.
- E. USE EXISTING CONDUIT.
- F. USE EXISTING BASE MOUNTED CABINET INSTALLED BY TMS NO. K043.

GENERAL NOTES

1. THE CONTRACTOR SHALL REMOVE ALL UNUSED ELECTRICAL CABLES.

EQUIPMENT LIST 'B'

EQUIPMENT TO BE FURNISHED AND INSTALLED BY THE CONTRACTOR.		
CATEGORY CODE	QUANTITY	DESCRIPTION
8057	1300 LF	ELECTRICAL CABLE - 5 CONDUCTOR (NO.14 AWG)

A- ELECTRICAL CABLE - 5 CONDUCTOR (NO.14 AWG)

TOD NO: XX439-30
SHA NO: PG995B5F
US 1 @ 37th Street



STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION
US 1 (RHODE ISLAND AVENUE) FROM:
37TH STREET TO MD 208 (38TH STREET)
MOUNT RAINIER, MARYLAND

INTERCONNECT PLAN

SCALE 1" = 30' ADVERTISED DATE 4/22/13 CONTRACT NO. XX1065285

DESIGNED BY MIV COUNTY PRINCE GEORGE'S
DRAWN BY MIV LOGMILE 16000100.34 TO 16000100.48
CHECKED BY SDY TMS NO. K365
F.A.P. NO. TOD NO.

TS NO. 240 / 1129 DRAWING SG-03 OF 03 SHEET NO. 03 OF 03

APPROVALS	REVISIONS
TEAM LEADER	
ASST. DIR. CHIEF	
DIVISION CHIEF	
OFFICE DIRECTOR	

PLOTTED: Monday, April 22, 2013 AT 09:50 PM
FILE: I:\PROJECTS\4014255\4014255_0039\Drawings\TRA\pSG-C000_L01.dgn



UTILITY LEGEND			
— E — E —	ELECTRIC CABLES	— SD — SD —	STORM DRAIN
— A — A —	AERIAL CABLES	— G — G —	GAS MAIN
— T — T —	TELEPHONE CABLES	— W — W —	WATER MAIN
— F — F —	FIBER-OPTIC	— S — S —	SEWER MAIN