PHASE CHART

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
PHASE 2 & 5	G ◀G–	G ◀G–	G	–R▶	–R▶	R	R	R	R	R	WK	WK	DW	DW
PED CLEARANCE	G ◀G–	G ◀G–	G	–R▶	–R▶	R	R	R	R	R	FL/DW	FL/DW	DW	DW
2 & 5 CHANGE	G ◀G–	G ◀G–	G	–R▶	–R▶	R	R	R	R	R	DW	DW	DW	DW
PHASE 2 & 6	G ◀G–	G ◀G–	G	–G▶	–G▶	R	R	R	R	R	DW	DW	DW	DW
2 & 6 CHANGE	Y	Y	Y	–G▶	–G▶	R	R	R	R	R	DW	DW	DW	DW
PHASE 3 & 7	R	R	R	–G▶	–G▶	R	R	G	G	G	DW	DW	DW	DW
3 & 7 CHANGE	R	R	R	–Y▶	–Y▶	R	R	G	G	G	DW	DW	DW	DW
PHASE 4 & 7	R	R	R	–R▶	–R▶	R	R	G	G	G	DW	DW	WK	WK
PED CLEARANCE	R	R	R	–R▶	–R▶	R	R	G	G	G	DW	DW	FL/DW	FL/DW
4 & 7 CHANGE	R	R	R	–R▶	–R▶	R	R	Y	Y	Y	DW	DW	DW	DW
PHASE 8	R	R	R	–R▶	–R▶	G ◀G–	G	R	R	R	DW	DW	DW	DW
8 CHANGE	R	R	R	–R▶	–R▶	Y	Y	R	R	R	DW	DW	DW	DW
Flashing Operation	FL/Y	FL/Y	FL/Y	FL –Y▶	FL –Y▶	FL/R	FL/R	FL/R	FL/R	FL/R	DARK	DARK	DARK	DARK

WIRING DIAGRAM

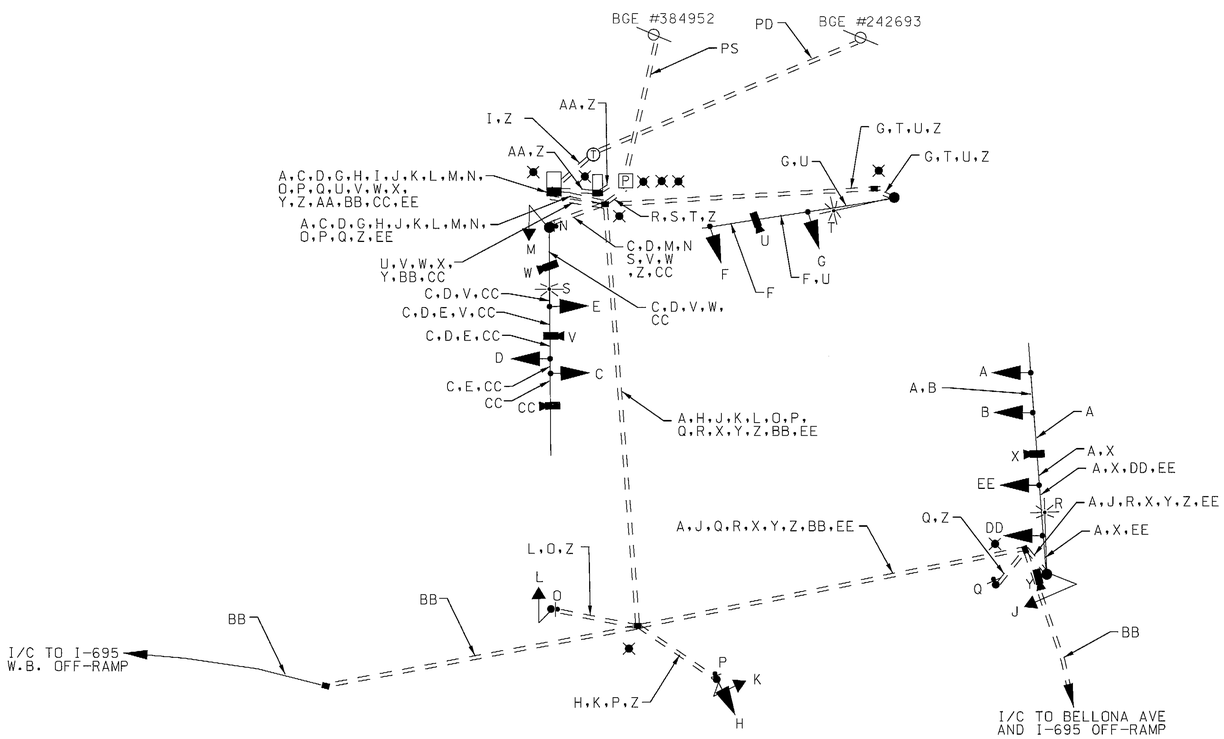

WIRING KEY

A,C,D	7-CONDUCTOR ELECTRICAL CABLE (NO. 14 AWG)
B,E,F,G,H,J,K,L,M,DD,EE	5-CONDUCTOR ELECTRICAL CABLE (NO. 14 AWG)
N,O,P,Q	2-CONDUCTOR ELECTRICAL CABLE (NO. 14 AWG)
R,S,T	2-CONDUCTOR ELECTRICAL CABLE (NO. 12 AWG) TC
U,V,W,CC	250 FT. VIDEO DETECTION CAMERA CONTROL CABLE
X,Y	500 FT. VIDEO DETECTION CAMERA CONTROL CABLE
Z	STRANDED BARE COPPER GROUND WIRE (NO. 6 A.W.G.)
AA	1-CONDUCTOR ELECTRICAL CABLE NO.4 AWG – THHN/THWN (3 RUNS)
BB	12-PAIR COMMUNICATION CABLE (SEE INTERCONNECT PLAN FOR DETAIL)
I	5-PAIR NO. 22 A.W.G. SHIELDED COPPER CABLE
PS	UNDERGROUND POWER SERVICE TO BE INSTALLED BY BGE
PD	UNDERGROUND PHONE SERVICE TO BE INSTALLED BY VERIZON
✖	GROUND ROD

SHA

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION

OFFICE OF TRAFFIC & SAFETY
TRAFFIC ENGINEERING DESIGN DIVISION

MD 139 (CHARLES ST.) AND BELLONA AVE (EAST) / WB I-695 ON RAMP
TOWSON, MARYLAND

GENERAL INFORMATION SHEET 2

SCALE NONE DATE MAY 2008 CONTRACT NO. BA9775A72

Rummel, Klepper & Kahl, LLP
Consulting Engineers Since 1923
81 Mosher Street
Baltimore, Maryland 21217
www.rkk.com
Ph: 410.728.2900 Fax: 410.728.3160

DESIGNED BY MLH
DRAWN BY MLH
CHECKED BY DAE
FAP NO. SEE TITLE SHEET

COUNTY BALTIMORE
LOGMILE 03013903.56
TIMS NO. I-572
TOD NO.

TS NO. 4668 GI | DRAWING SP-13 OF 15 | SHEET NO. 374 OF 443

PLOTTED: Wednesday, June 25, 2008 AT 10:38 AM
FILE: M:\projects\2003\03136_obd\03135-37\CADD\Traffic Plans\Signal Plans\pGI2-MD139@Bellona Ave.dgn