12/7/00 6:54:36 PM G:\PLOTTING\PS7\OCF\MYLAR_HP.cet McSendy Pierre Division: Transportation m:\1997\0197029\md28\RIFFLE\g102RF_4.PRF

TEMPORARY WIRING NOTES:

1) NEW AND RELOCATED SIGNAL HEADS SHALL BE WIRED WITH SUFFICIENT CABLE TO PROVIDE REALIGNMENT IN SUBSEQUENT CONSTRUCTION PHASES.

2) EXISTING WIRING FOR EQUIPMENT WHICH IS TO BE REMOVED OR ABANDONED SHALL BE REMOVED AND DISPOSED.

3) EXISTING WIRING NOT DETAILED SHALL BE MAINTAINED UNLESS OTHERWISE NOTED.

PHASE 4 WIRING DIAGRAM

WIRING LEGEND:

A - 2 CONDUCTOR ELECTRICAL CABLE - ALUMINUM SHIELDED
LW - LOOPWIRE ENCASED IN FLEXIBLE TUBING (NO 14 AWG)

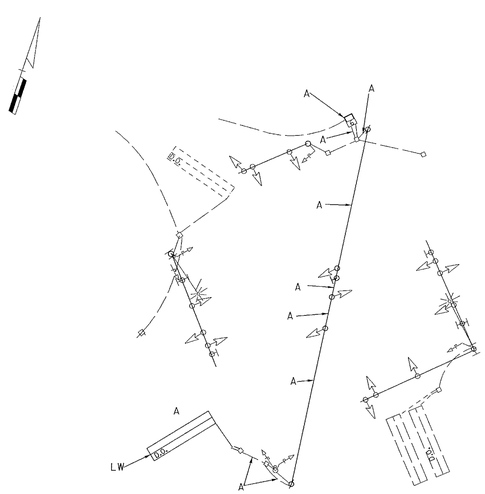

EQUIPMENT LIST 'B'

B. EQUIPMENT TO BE FURNISHED AND/OR INSTALLED BY THE CONTRACTOR.

QUANTITY	UNIT	SPECIFICATION SECTION	DESCRIPTION
25	LF	556	24 INCH WHITE REMOVABLE PREFORMED PAVEMENT MARKING TAPE
4	LF	805	FURNISH AND INSTALL 1 INCH LIQUID TIGHT FLEXIBLE NON-METALLIC CONDUIT FOR DETECTOR SLEEVE
250	LF	810	FURNISH AND INSTALL ELECTRICAL CABLE- 2 CONDUCTOR (ALUMINUM SHIELDED)
470	LF	810	FURNISH AND INSTALL LOOP WIRE ENCASED IN FLEXIBLE TUBING (NO 14 AWG)
115	LF	815	FURNISH AND INSTALL SAWCUT FOR SIGNAL (LOOP DETECTOR)
4	EA	SP	COVER SIGNAL HEAD/SIGN

TSP 6

REVISION 'A'
KCI TECHNOLOGIES INC.
ENGINEERS AND PLANNERS
10 NORTH PARK DRIVE
HUNT VALLEY, MARYLAND
21030-1888
(410) 316-7800

REVISIONS
⑥ 10-00 NEW
MD 28 GEOMETRICS
SHA CONT. NO. MD5285271
△3 ADDENDUM NO. 3
NEW SHEET
12/19/2000
A.H.

APPROVALS
PROJECT MANAGER, SIGNAL DESIGN DIVISION
ORIGINALS
ASST. CHIEF, TRAFFIC ENGINEERING DESIGN DIVISION
ON
CHIEF, TRAFFIC ENGINEERING DESIGN DIVISION
FILE
DIRECTOR, TRAFFIC & SAFETY

MARYLAND DOT - STATE HIGHWAY ADMINISTRATION
Office of Traffic & Safety
TRAFFIC ENGINEERING DESIGN DIVISION
GENERAL INFORMATION SHEET
PHASE 4
MD 28 (DARNESTOWN RD) AND RIFFLE FORD RD / SEURAT DRIVE

DRAWN BY: S. CHERNAK
CHECKED BY: M. RUCKER
SCALE: NONE
DATE: 4-18-96

F.A.P. NO. STPG-0005 (301) E
S.H.A. NO. AW 791-479-385
COUNTY: MONTGOMERY
LOG MILE: I5002B15.21

TS NO. 3602A-GIX-3
T.I.M.S. NO. D107

SHEET NO. ___ OF ___

M:\1997\0197029\MD28\

12/7/00 6:54:36 PM G:\PLOTTING\PS7\OCF\MYLAR_HP.cet McSendy Pierre Division: Transportation m:\1997\0197029\md28\RIFFLE\g102RF_4.PRF