Charles Street Interchange

PROPOSED PHASE 1 IMPROVEMENTS

Existing Interchange

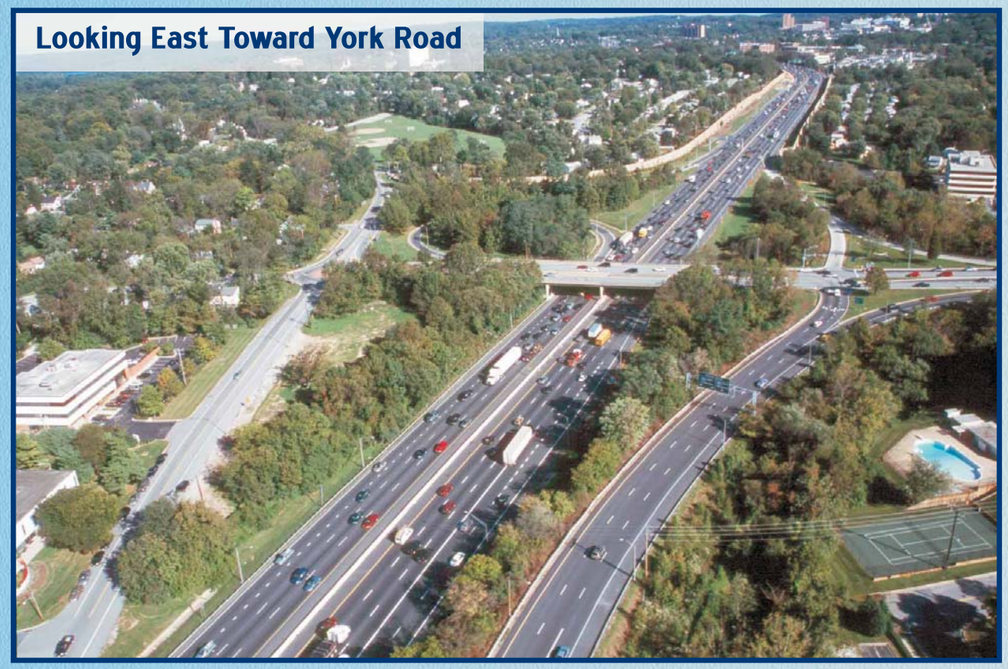

Proposed Interchange

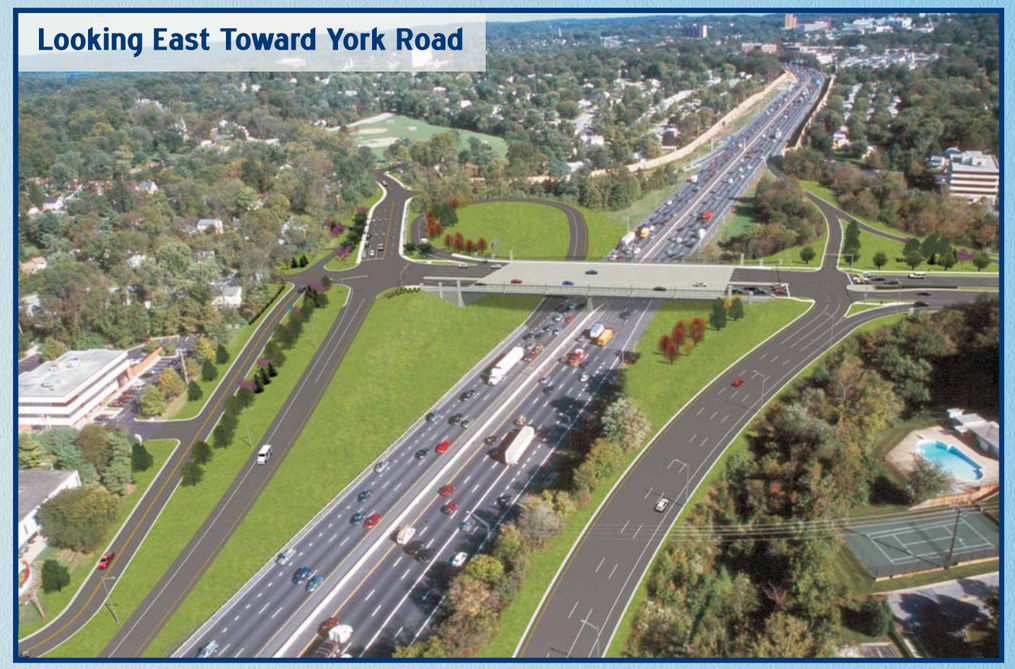

Traffic Flow, Safety and Streetscape Improvements:

- Replacement of the Charles Street and Bellona Avenue roundabout with a new traffic signal
- A new traffic signal at the I-695 Outer Loop off-ramp and Bellona Avenue
- Reconfiguration of the Bellona Avenue / Charles Street ramp to the I-695 Outer Loop - separating business and ramp traffic
- A new auxiliary lane along northbound Charles Street between Kenilworth Drive and the I-695 Inner Loop on-ramp
- A new auxiliary lane along I-695 Outer Loop between the York Road on-ramp and the Charles Street off-ramp
- New bicycle lanes along Charles Street between Kenilworth Drive and Bellona Avenue
- New sidewalks, pedestrian ramps and audible pedestrian signals along Charles Street and Bellona Avenue
- New interchange and I-695 lighting and signing
- Architectural finishes and decorative fencing on retaining walls along Charles Street and Bellona Avenue
- Landscaped medians and roadside areas
- Revegetation along I-695 and areas disturbed by construction along Charles Street