



TEMPORARY TRAFFIC CONTROL TYPICAL APPLICATION

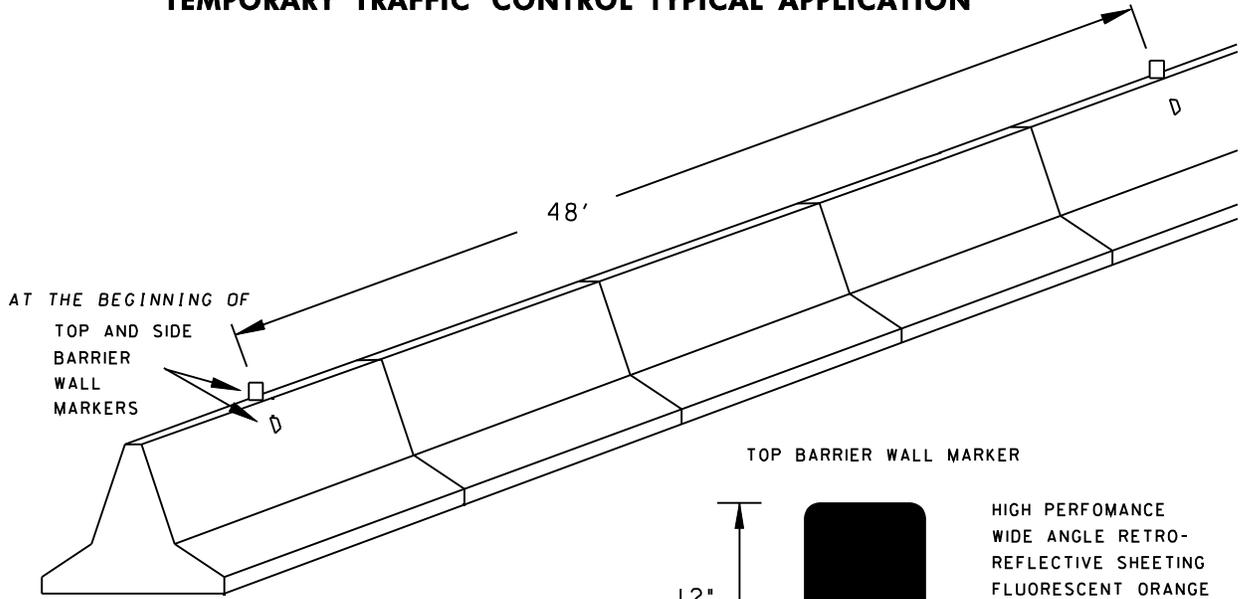


TOP BARRIER WALL MARKER




HIGH PERFORMANCE
WIDE ANGLE RETRO-
REFLECTIVE SHEETING
FLUORESCENT ORANGE

TOP AND SIDE
BARRIER
WALL
MARKERS



NOTE:
FOR BIFURCATED F-SHAPED
BARRIER, MAINTAIN 30 INCH
HEIGHT TO TOP OF MARKER

SIDE BARRIER WALL MARKER



HIGH PERFORMANCE
WIDE ANGLE RETRO-
REFLECTIVE SHEETING
OR RETROREFLECTIVE
REFLECTORS

MINIMUM REFLECTIVE
AREA, 7.5 SQ. IN.


NOTES: SIDE BARRIER MARKERS SHALL BE YELLOW IN COLOR WHEN PLACED ON MEDIAN-SIDE BARRIER (SEPARATING OPPOSING TRAFFIC).

SIDE BARRIER MARKERS SHALL BE WHITE IN COLOR WHEN PLACED ON SHOULDER-SIDE BARRIER (OR BARRIER SEPARATING SAME DIRECTION TRAFFIC).

THE 48 FOOT SPACINGS BETWEEN MARKERS SHALL BE MAINTAINED ON CURVES/TURNS.

INSTALL SIDE MARKERS IN CONFORMANCE WITH MANUFACTURERS DIRECTIONS.

THE BOTTOM OF THE TOP MARKER SHALL BE AT THE SAME ELEVATION AS THE TOP OF THE BARRIER. NO ATTACHMENT METHOD MAY BLOCK ANY PART OF THE REFLECTIVE AREA OF THE MARKER. BACKING FOR TOP MARKERS SHALL BE SHEET ALUMINUM, MEETING MATERIAL THICKNESS PER TEMPORARY TRAFFIC SIGNS SPECIFICATIONS OR ANY OTHER MATERIAL APPROVED BY OOTS.

SPECIFICATION 104	CATEGORY CODE ITEMS										
APPROVED											
DIRECTOR - OFFICE OF TRAFFIC AND SAFETY											
SHA State Highway Administration	<table border="1"> <tr> <td>APPROVAL • SHA REVISIONS</td> <td>APPROVAL • FEDERAL HIGHWAY ADMINISTRATION</td> </tr> <tr> <td>APPROVAL 8-20-03</td> <td>APPROVAL 9-23-03</td> </tr> <tr> <td>REVISED 5-29-07</td> <td>REVISED 5-2-07</td> </tr> <tr> <td>REVISED</td> <td>REVISED</td> </tr> <tr> <td>REVISED</td> <td>REVISED</td> </tr> </table>	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	APPROVAL 8-20-03	APPROVAL 9-23-03	REVISED 5-29-07	REVISED 5-2-07	REVISED	REVISED	REVISED	REVISED
APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION										
APPROVAL 8-20-03	APPROVAL 9-23-03										
REVISED 5-29-07	REVISED 5-2-07										
REVISED	REVISED										
REVISED	REVISED										

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES

BARRIER DELINEATION
BARRIER 4 FEET OR CLOSER TO EDGE LINE

STANDARD NO.

MD 104.01-25