



RADIUS VARIES  
MIN. 3 1/2"

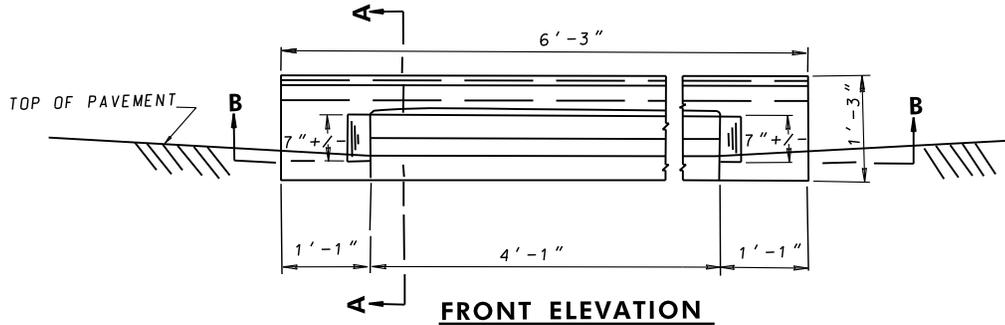

1" RADIUS FILLETS  
IN ALL CORNERS

**SECTION B-B**

NO. 6 DIAMETER  
DEFORMED BAR,  
STRAIGHT

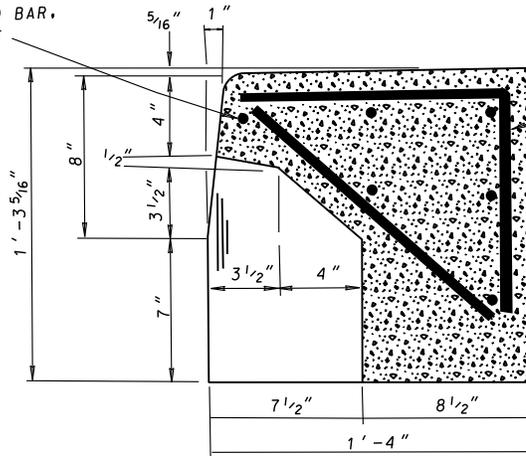

NO. 4 DIAMETER DEFORMED BARS  
8" C/C BENT THUS

ALL OTHER BARS, NO. 4 DIAMETER  
DEFORMED BARS, 8" C/C STRAIGHT

**SECTION A-A**

NOTE: CONCRETE, S.H.A. FINISH,  
GRANULITHIC APPROX.  
WEIGHT-1200 LBS.

SPECIFICATION <b>305</b>	CATEGORY CODE ITEMS
APPROVED	DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT
	APPROVAL • SHA REVISIONS
	APPROVAL 1-23-69
	REVISD 11-18-04
	REVISD
	REVISD

**Maryland Department of Transportation**  
**STATE HIGHWAY ADMINISTRATION**  
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES  
**STANDARD TYPE E COMBINATION INLET**  
**DETAIL OF SPECIAL CURB**

**STANDARD NO.**

**MD 376.24**