


RIGHT SIDE OF ROADWAY

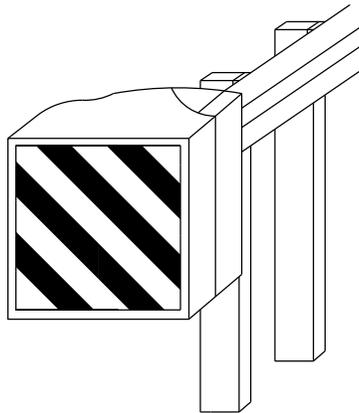

LEFT SIDE OF ROADWAY

NOTES

1. TYPE IX OR XI REFLECTIVE SHEETING, 4" STRIPES, BLACK ON FLUORESCENT YELLOW, RUNNING DOWN TOWARDS ROAD AT 45 DEGREE ANGLE.
2. WHEN PLACING SHEETING ON BARE METAL, METAL SHOULD BE CLEANED AS PER MANUFACTURER'S RECOMMENDATIONS PRIOR TO APPLICATION OF SHEETING.
3. SHEETING SHOULD EXTEND TO TOP AND BOTTOM AND FULL WIDTH OF TERMINAL. SIZE MAY BE ADJUSTED AS NECESSARY TO FIT DIFFERENT MANUFACTURER'S TERMINALS.
4. REFER TO APPROPRIATE 600 SERIES STANDARD FOR DETAILS ASSOCIATED WITH SPECIFIC TRAFFIC BARRIER END TREATMENTS.
5. DELINEATION WILL BE INCIDENTAL TO THE APPROPRIATE TRAFFIC BARRIER END TREATMENT.

SPECIFICATION 605	CATEGORY CODE ITEMS
APPROVED	Cedric Ward (signature on file) DIRECTOR - OFFICE OF TRAFFIC AND SAFETY
	APPROVAL • SHA REVISIONS
	APPROVAL 08-20-12
	REVISED
	REVISED
APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	APPROVAL 08-13-12
REVISED	REVISED
REVISED	REVISED
REVISED	REVISED

Maryland Department of Transportation
STATE HIGHWAY ADMINISTRATION
 STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
TYPE 'B' AND TYPE 'C' TRAFFIC BARRIER
END TREATMENT DELINEATION

STANDARD NO.

MD 605.02-01